




USB A+C/ C+C






USB A+C Lader
USB A+C Charger
USB A+C Ladduttag



5V 3A, 12V 1.5A, 9V 2A



USB C+C Lader
USB C+C Charger
USB C+C Ladduttag



Technical Info	
Input	220-240 50/60Hz
Standby consumption	<0,1W
Cable cross section	1,5-2,5mm ²
USB A	5V - 3A = 15W
USB C	5V - 3A = 15W 9V - 2A = 18W 12V - 1,5A = 18W
Protection	- Overcurrent - Overvoltage - Overheat protection - Short circuit
Overvoltage category	OVC III
Class of equipment	Class II

Technical Info	
Input	220-240 50/60Hz
Standby consumption	<0,3W
Cable cross section	1,5-2,5mm ²
1 port (single use)	5V - 3A = 15W 9V - 3A = 18W 12V - 3A = 36W 15V - 3A = 45W 20V - 3A = 60W
2 ports (double use)	5V - 3A = 15W 9V - 3A = 18W 12V - 2,5A = 30W 15V - 2A = 30W 20V - 1,5A = 30W
Protection	- Overcurrent - Overvoltage - Overheat protection - Short circuit
Overvoltage category	OVC III
Class of equipment	Class II
Charging protocols	PD2.0 / PD3.0 / QC2.0 QC3.0 / AFC / SCP / FCP PPS / DCP-1.5A / Support Apple 2.4a

NO: Kan kun installeres og vedlikeholdes av en registrert installasjonsvirksomhet.

DK: Må kun installeres og vedligeholdes af uddannet elektriker.

SE: Skall installeras och underhållas av behörig elektriker.

EN: Only to be installed and maintained by an authorized electrician.

FR: Doit être installé et maintenu par un électricien qualifié.

NL: Mag alleen geïnstalleerd en onderhouden worden door een bevoegde elektricien.

DE: Dieses Produkt darf nur durch autorisiertes Personal (z.B. Elektro-Installateur) angeschlossen, in Betrieb genommen und gewartet werden.

FI: Asentaa ja huoltaa saa vain valtuutettu sähköasentaja

NO: Skru av strømmen før montering.

DK: Sluk for strømmen inden montering.

SE: Stäng av strømmen innan montering.

EN: Turn off power before installing.

FR: Couper le courant avant l'installation.

NL: Stroom uitschakelen voor u het toestel installeert.

DE: Vor Installationsarbeiten den Strom abschalten.

FI: Sammuta virta ennen kytkemistä

NORWAY

SG Armaturen AS

Skytterheia 25
N-4790 Lillesand

Tel: +47 37 50 03 00
firmapost@sg-as.no
www.sg-as.no

SWEDEN

SG Armaturen AB
Tel: +46 31 81 71 10
info@sg-ab.se
www.sg-ab.se

DENMARK

SG Armaturen A/S
Tel: +45 70 70 72 13
info@sg-as.dk
www.sg-as.dk

GERMANY

SG Leuchten GmbH
Tel: +49 40 23 99 44 59
info@sg-leuchten.de
www.sg-leuchten.de

FINLAND

SG Armaturen Oy
Tel: +358 02 07 30 39 60
info@sg-oy.fi
www.sg-oy.fi

FRANCE

SG Lighting SA/NV
Tel: +33(0) 4 94 93 00 00
info.france@sglighting.fr
www.sglighting.net

BENELUX

SG Lighting SA/NV
Tel: +32(0) 15 20 72 71
info.benelux@sglighting.net
www.sglighting.net


SWITZERLAND

SG Leuchten SA
Tel: + +41 44 868 20 00
info@sg-leuchten.ch
sg-leuchten.ch


INTERNATIONAL

SG Lighting Co Ltd.
Tel: +86 769 88 49 20 88
cindy@sgdgc.com
www.sg-as.com


1



2

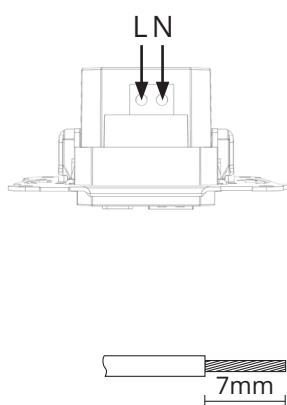

3

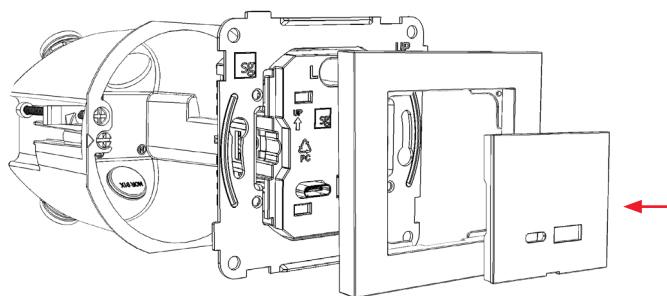

NO: USB må være installert i boksen

SE: USB måste installeras i dosan

EN: USB must be installed in the box

FI: USB on oltava asennettuna laatikkoon