

# Junistar Square /x2



Attractive downlight for indoor use with 30-degree 360-degree stepless tilt. Well integrated LED chip and dimmable Phase cut-off. Made of die-cast powder-coated aluminium or brushed steel, glass diffuser. 42-degree scattering angle via reflector. Low recessed downlight with hole size Ø83mm. Tool-free mounting in mounting box for direct 230 V with loopable quick clips and automatic strain relief. IP44, KL III with dedicated circuit.

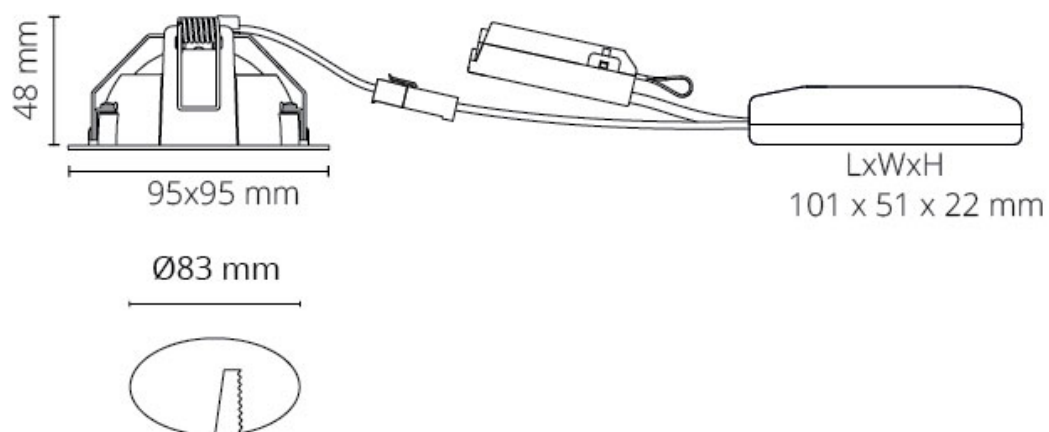
# Junistar Square /x2









## Product- and environment images



# Junistar Square /x2



For line drawing dimensions please see each single article codes on next page

Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>902322</p> <p><b>Junistar Square Brushed steel</b></p> <p><b>625lm 3000K Ra&gt;95 Trailing edge</b></p> <p><b>7.3W LED</b></p> <p>86 lm/W SDCM:2</p> <p>L90/B10&gt;100,000</p> <p>Beam: 42°, Direct, Reflector</p>	<p><b>Class II SELV</b></p> <p><b>IP44</b></p>	Trailing edge	<p>Recessed, Indoor</p> <p>Screwless terminal block</p>	L95 x W95 x H50
<b>Accessories</b>				
 <p>820489</p> <p><b>Sensor Dim Box White 200VA 200VA</b></p>				L220 x W75 x H34
 <p>8246094429</p> <p><b>Emergencybox Driver DALI / EM Self test, DALI Emergency 3H</b></p>				L270 x W75 x H35
 <p>820090</p> <p><b>Emergencybox Adapter kit for downlight</b></p>				L250 x W13 x H13
 <p>8246094364</p> <p><b>Emergencybox On-Off/Trailing edge / EM Self test, Emergency 3 hours</b></p>				L270 x W75 x H35
 <p>8246094500</p> <p><b>Emergencybox Driver DALI / EM DALI/Self test, Emergency 3 hours</b></p>				L270 x W75 x H35