


Tysnes 66 Sensor Dim









IP66 IK10






220-240V, 50/60Hz

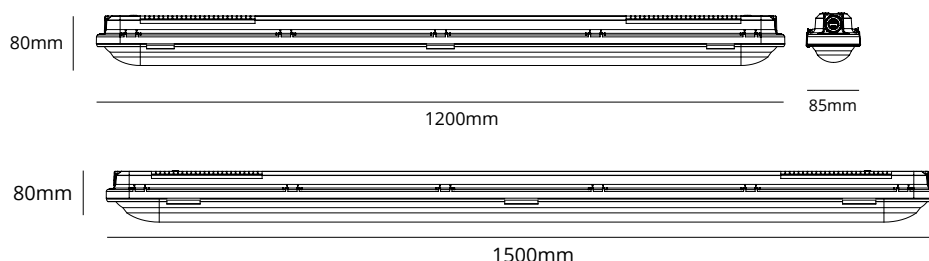

Alt A

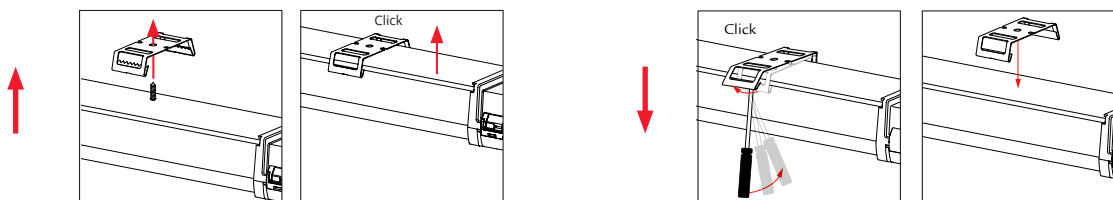

Alt B



NORWAY

SG Armaturen AS

Skytterheia 25
N-4790 Lillesand

Tel: +47 37 50 03 00
firmapost@sg-as.no
www.sg-as.no

SWEDEN

SG Armaturen AB

Tel: +46 31 81 71 10
info@sg-ab.se
www.sg-ab.se

DENMARK

SG Armaturen A/S

Tel: +45 70 70 72 13
info@sg-as.dk
www.sg-as.dk

GERMANY

SG Leuchten GmbH

Tel: +49 40 23 99 44 59
info@sg-leuchten.de
www.sg-leuchten.de

UNITED KINGDOM

SG Lighting LTD

Tel: +47 37 50 03 00
info@sglighting.co.uk
www.sglighting.co.uk

FRANCE

SG Lighting SA/NV

Tel: +33(0) 4 94 93 00 00
info.france@sglighting.fr
www.sglighting.net

BENELUX

SG Lighting SA/NV

Tel: +32(0) 15 20 72 71
info.benelux@sglighting.net
www.sglighting.net

SWITZERLAND

SG Leuchten SA

Tel: +41 44 868 20 00
info@sg-leuchten.ch
sg-leuchten.ch

FINLAND

SG Armaturen Oy

Tel: +358 02 07 30 39 60
info@sg-oy.fi
www.sg-oy.fi








INTERNATIONAL

SG Lighting Co Ltd.


Tel: +86 769 88 49 20 88
cindy@sgdgc.com
www.sg-as.com

Alt C

45° Bracket not included

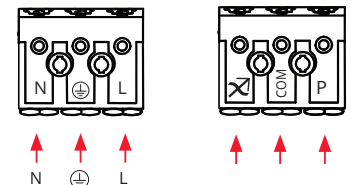

TET 7-13



PG 13,5/M20,
not included



Product name	Max number of luminaires
Sensor 1200	36
Sensor 1500	36

Dipswitch

Tysnes 66 1200:



	ON	ON	ON	ON	ON	ON	ON	ON
	1 2 3	1 2 3	1 2 3	1 2 3	1 2 3	1 2 3	1 2 3	1 2 3
mA	700	750	800	850	900	950	1000	1050
lm	78%	83%	89%	94%	100%	-	-	-

Tysnes 66 1500:



	ON	ON	ON	ON	ON	ON	ON	ON
	1 2 3	1 2 3	1 2 3	1 2 3	1 2 3	1 2 3	1 2 3	1 2 3
mA	700	750	800	850	900	950	1000	1050
lm	67%	71%	76%	81%	86%	90%	95%	100%

2: Replaceable (LED only)
light source by a professional



3: Replaceable control gear
by a professional



NO: Kan kun installeres og vedlikeholdes av en registrert installasjonsvirksomhet.

DK: Må kun installeres og vedligeholdes af uddannet elektriker.

SE: Skall installeras och underhållas av behörig elektriker.

EN: Only to be installed and maintained by an authorized electrician.

FR: Doit être installé et maintenu par un électricien qualifié.

NL: Mag alleen geïnstalleerd en onderhouden worden door een bevoegde elektricien.

DE: Dieses Produkt darf nur durch autorisiertes Personal (z.B. Elektro-Installateur) angeschlossen, in Betrieb genommen und gewartet werden.

FI: Asentaa ja huoltaa saa vain valtuutettu sähköasentaja

NO: Skru av strømmen før montering.

DK: Sluk for strømmen inden montering.

SE: Stäng av strømmen innan montering.

EN: Turn off power before installing.

FR: Couper le courant avant l'installation.

NL: Stroom uitschakelen voor u het toestel installeert.

DE: Vor Installationsarbeiten den Strom abschalten.

FI: Sammuta virta ennen kytkemistä

NO: Til bruk i miljøer der ansamling av ledende støv på armaturen er forventet

DK: Til brug i miljøer, hvor der må forventes en akkumulering af ledende støv på armaturet.

SE: För användning i miljöer där ackumulering av ledande damm på armaturen förväntas.

EN: For use in environments where an accumulation of conductive dust on the luminaire may be expected

FR: Pour une utilisation dans les environnements où de la poussière conductrice peut se déposer sur le luminaire

NL: Voor gebruik in omgevingen waar een opeenhoping van stof op de armaturen kan worden verwacht


DE: Diese Leuchten sind auch für Umgebungen geeignet, in denen leitfähiger Staub vorhanden sein kann


FI: Valaisimet soveltuvat hyvin pölyisiin tiloihin palovaaran välttämiseksi

Sensor Dim

Motion and daylight




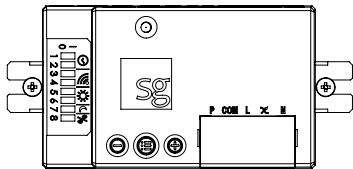

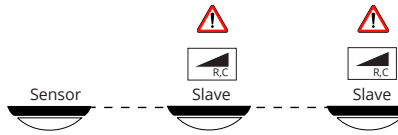


Max 200VA

No Com

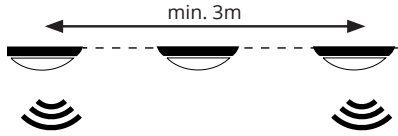


With Com

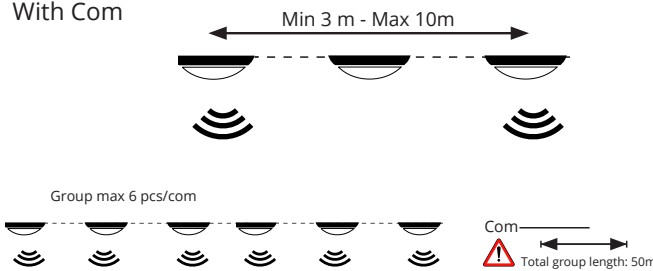


Group max 6 pcs/com


Com Total group length: 50m


Master/Master

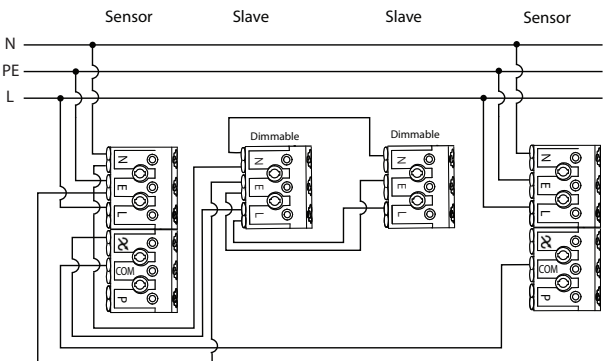


Push

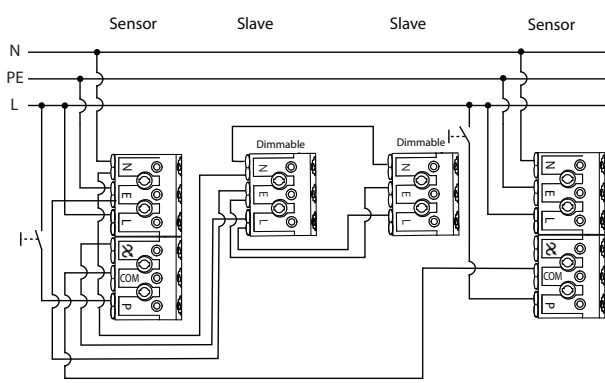





NO: Impulsbryter (valgfritt)
 DK: Impulsafbryder (valgfri)
 SE: Impulsbrytare (valgfritt)
 EN: Push button (optional)
 FR: Bouton-poussoir (optionnel)
 NL: Drukknop (optioneel)
 DE: Druckknopf (optional)
 FI: Painonappi (valinnainen)



Max 50m

	1	2
Hold time	10 minutes	1 1
	5 minutes	0 1
	1 minute	1 0
	5 seconds	0 0

Standard

	3	4
Motion sensitivity	High	1 1
	Medium	0 1
	Low	1 0
	Off	0 0

Standard

	5	6
Daylight sensitivity	Low	1 1
	Medium	0 1
	High	1 0
	Off	0 0

Standard

	7
Midnight cut	On
	Off

Standard

	8
Basic light	On
	Off

Standard

NORWAY
SG Armaturen AS

Skytterheia 25
N-4790 Lillesand

Tel: +47 37 50 03 00
firmapost@sg-as.no
www.sg-as.no

SWEDEN
SG Armaturen AB
Tel: +46 31 81 71 10
info@sg-ab.se
www.sg-ab.se

FINLAND
SG Armaturen Oy
info@sg-oy.fi
www.sg-oy.fi

DENMARK
SG Armaturen A/S
Tel: +45 70 70 72 13
info@sg-as.dk
www.sg-as.dk

UNITED KINGDOM
SG Lighting LTD
Tel: +47 37 50 03 00
info@sglighting.co.uk
www.sglighting.co.uk

FRANCE
SG Lighting SA/NV
Tel: +33(0) 4 94 93 00 00
info.france@sglighting.fr
www.sglighting.net

BENELUX
SG Lighting SA/NV
Tel: +32(0) 15 20 72 71
info.benelux@sglighting.net
www.sglighting.net


GERMANY
SG Leuchten GmbH
Tel: +49 40 23 99 44 59
info@sg-leuchten.de
www.sg-leuchten.de

INTERNATIONAL
SG Lighting Co Ltd.
Tel: +86 769 88 49 20 88
cindy@sgdgc.com
www.sg-as.com

Rev: 03.04.2024

Hold time






✓

	1	2
10 min	1	1
5 min	0	1
1 min	1	0
5 sec	0	0




Motion sensitivity

Sensitivity	3	4
High	1	1
Medium	0	1
Low	1	0
Off	0	0

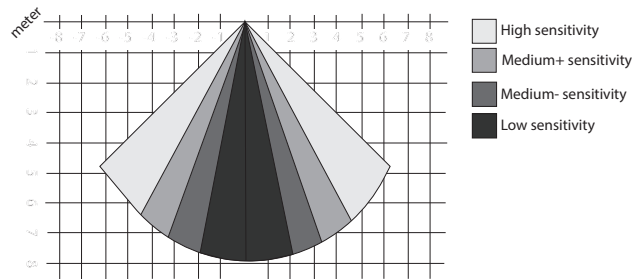


1





High


2





Medium

3






Low

Daylight sensitivity

Sensitivity	5	6
Low	1	1
Medium	0	1
High	1	0
Off	0	0

2




Medium





3




High







Midnight cut

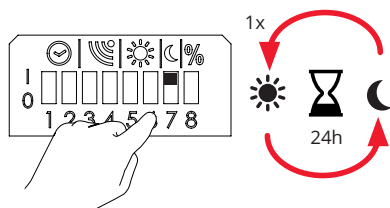


~00:00 – 05:00 AM

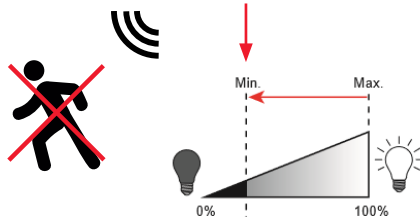


~00:00 – 05:00 AM

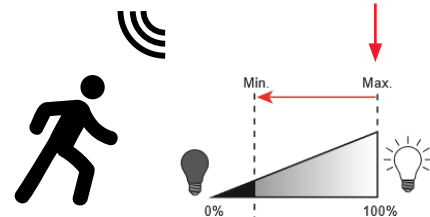


Light levels - Basic light and max light



1




2

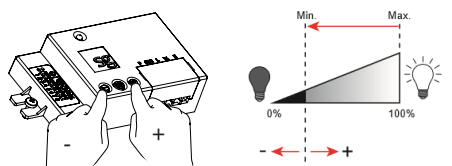


Basic light


3




4

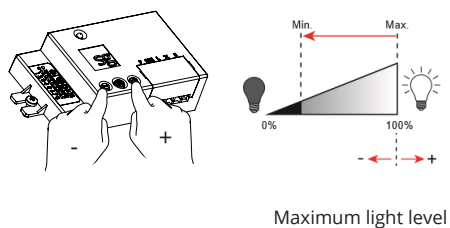


5




Light levels - Midnight cut



1

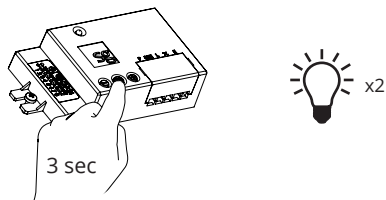


2

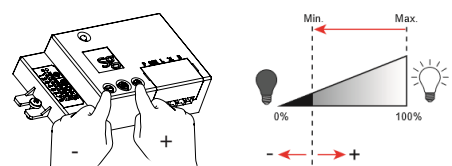


Minimum midnight cut


3



4

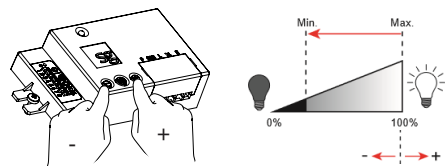

5



Maximum midnight cut