

# Rax Soft Surface 150 IP65




Rax Soft Surface 150 IP65 is a high-performance surface mounted downlight for outdoor use or other areas requiring high IP-resistance. It has excellent light control by a combination of optimized lens and reflector optics.

# Rax Soft Surface 150 IP65



## Produkt- und Umgebungsbilder

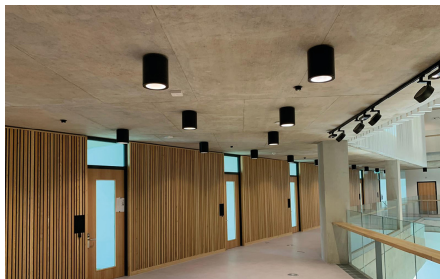

| Artikel                                                                             |                                          | Schutzklasse    | Controller    | Montage/Anschluss       | Größe       |
|-------------------------------------------------------------------------------------|------------------------------------------|-----------------|---------------|-------------------------|-------------|
|    | 212760                                   | <b>Klasse I</b> | Nicht dimmbar | Anbau, Indoor / Outdoor | Ø175 x H196 |
|                                                                                     | <b>Rax Soft Surface IP65 150 Schwarz</b> | <b>IP65</b>     |               | 5 pol Anschlussklemme   |             |
|                                                                                     | <b>4000 3550lm 3000K Ra&gt;80 Nicht</b>  | <b>IK06</b>     |               |                         |             |
|                                                                                     | <b>dimmbar</b>                           |                 |               |                         |             |
|                                                                                     | <b>34W LED</b>                           |                 |               |                         |             |
|                                                                                     | 104 lm/W SDCM:2                          |                 |               |                         |             |
|                                                                                     | L90/B10>100.000                          |                 |               |                         |             |
|                                                                                     | Beam: 68°, Direkt, Satin Matt            |                 |               |                         |             |
|                                                                                     | Reflector                                |                 |               |                         |             |
|    | 212758                                   | <b>Klasse I</b> | Nicht dimmbar | Anbau, Indoor / Outdoor | Ø175 x H196 |
|                                                                                     | <b>Rax Soft Surface IP65 150 Weiss</b>   | <b>IP65</b>     |               | 5 pol Anschlussklemme   |             |
|                                                                                     | <b>4000 3560lm 3000K Ra&gt;80 Nicht</b>  | <b>IK06</b>     |               |                         |             |
|                                                                                     | <b>dimmbar</b>                           |                 |               |                         |             |
|                                                                                     | <b>34W LED</b>                           |                 |               |                         |             |
|                                                                                     | 105 lm/W SDCM:2                          |                 |               |                         |             |
|                                                                                     | L90/B10>100.000                          |                 |               |                         |             |
|                                                                                     | Beam: 68°, Direkt, Satin Matt            |                 |               |                         |             |
|                                                                                     | Reflector                                |                 |               |                         |             |
|  | 212761                                   | <b>Klasse I</b> | Nicht dimmbar | Anbau, Indoor / Outdoor | Ø175 x H196 |
|                                                                                     | <b>Rax Soft Surface IP65 150 Schwarz</b> | <b>IP65</b>     |               | 5 pol Anschlussklemme   |             |
|                                                                                     | <b>4000 3680lm 4000K Ra&gt;80 Nicht</b>  | <b>IK06</b>     |               |                         |             |
|                                                                                     | <b>dimmbar</b>                           |                 |               |                         |             |
|                                                                                     | <b>34W LED</b>                           |                 |               |                         |             |
|                                                                                     | 108 lm/W SDCM:2                          |                 |               |                         |             |
|                                                                                     | L90/B10>100.000                          |                 |               |                         |             |
|                                                                                     | Beam: 68°, Direkt, Satin Matt            |                 |               |                         |             |
|                                                                                     | Reflector                                |                 |               |                         |             |
|  | 212759                                   | <b>Klasse I</b> | Nicht dimmbar | Anbau, Indoor / Outdoor | Ø175 x H196 |
|                                                                                     | <b>Rax Soft Surface IP65 150 Weiss</b>   | <b>IP65</b>     |               | 5 pol Anschlussklemme   |             |
|                                                                                     | <b>4000 3690lm 4000K Ra&gt;80 Nicht</b>  | <b>IK06</b>     |               |                         |             |
|                                                                                     | <b>dimmbar</b>                           |                 |               |                         |             |
|                                                                                     | <b>34W LED</b>                           |                 |               |                         |             |
|                                                                                     | 109 lm/W SDCM:2                          |                 |               |                         |             |
|                                                                                     | L90/B10>100.000                          |                 |               |                         |             |
|                                                                                     | Beam: 68°, Direkt, Satin Matt            |                 |               |                         |             |
|                                                                                     | Reflector                                |                 |               |                         |             |