

# Zip Pro 3-Circuit




Three-phase rail spot with integrated powerful LED chip and driver. Driver can switch between three brightness levels using a jumper terminal. Mounted using global multi-adapter, which is ideal for SG's three-phase rail system (Shopline) as well as other systems where Global can be used. ZIP is made of powder-coated aluminium, flexible and able to be pointed in almost all directions, making it the obvious choice for shops and exhibitions.

# Zip Pro 3-Circuit



## Galerie de produits et d'environnements

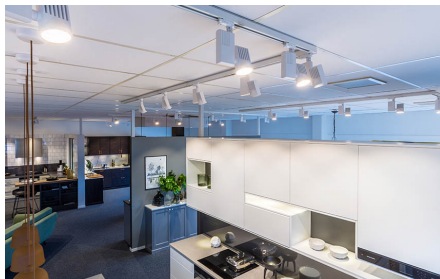

| Article                                                                             |                                                                    | Protection      | Convertisseurs | Montage/Connexion                 | Dimensions           |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------|-----------------|----------------|-----------------------------------|----------------------|
|    | 320736                                                             | <b>Classe I</b> | Non dimmable   | Surface, Indoor                   | Ø100 x L218 x W100 x |
|                                                                                     | <b>Zip Pro 3-Allumages Noir 40°</b>                                | <b>IP20</b>     |                | Rail ShopLine (adaptateur inclus) | H148                 |
|                                                                                     | <b>3370lm 3000K Ra&gt;90 Non dimmable</b>                          |                 |                |                                   |                      |
|                                                                                     | <b>40W LED</b>                                                     |                 |                |                                   |                      |
|                                                                                     | 84 lm/W SDCM:2<br>L90/B10>100,000<br>Beam: 40°, Directe, Reflector |                 |                |                                   |                      |
|    | 320734                                                             | <b>Classe I</b> | Non dimmable   | Surface, Indoor                   | Ø100 x L218 x W100 x |
|                                                                                     | <b>Zip Pro 3-Allumages Blanc 40°</b>                               | <b>IP20</b>     |                | Rail ShopLine (adaptateur inclus) | H148                 |
|                                                                                     | <b>3470lm 3000K Ra&gt;90 Non dimmable</b>                          |                 |                |                                   |                      |
|                                                                                     | <b>40W LED</b>                                                     |                 |                |                                   |                      |
|                                                                                     | 87 lm/W SDCM:2<br>L90/B10>100,000<br>Beam: 40°, Directe, Reflector |                 |                |                                   |                      |
|   | 320737                                                             | <b>Classe I</b> | Non dimmable   | Surface, Indoor                   | Ø100 x L218 x W100 x |
|                                                                                     | <b>Zip Pro 3-Allumages Noir 40°</b>                                | <b>IP20</b>     |                | Rail ShopLine (adaptateur inclus) | H148                 |
|                                                                                     | <b>3610lm 4000K Ra&gt;90 Non dimmable</b>                          |                 |                |                                   |                      |
|                                                                                     | <b>40W LED</b>                                                     |                 |                |                                   |                      |
|                                                                                     | 90 lm/W SDCM:2<br>L90/B10>100,000<br>Beam: 40°, Directe, Reflector |                 |                |                                   |                      |
|  | 320735                                                             | <b>Classe I</b> | Non dimmable   | Surface, Indoor                   | Ø100 x L218 x W100 x |
|                                                                                     | <b>Zip Pro 3-Allumages Blanc 40°</b>                               | <b>IP20</b>     |                | Rail ShopLine (adaptateur inclus) | H148                 |
|                                                                                     | <b>3710lm 4000K Ra&gt;90 Non dimmable</b>                          |                 |                |                                   |                      |
|                                                                                     | <b>40W LED</b>                                                     |                 |                |                                   |                      |
|                                                                                     | 93 lm/W SDCM:2<br>L90/B10>100,000<br>Beam: 40°, Directe, Reflector |                 |                |                                   |                      |
| <b>Accessoires</b>                                                                  |                                                                    |                 |                |                                   |                      |
|  | 314423                                                             | <b>Classe I</b> |                | Surface, Indoor                   | Ø100                 |
|                                                                                     | <b>Shopline Noir Patère-alimentation</b>                           | <b>IP20</b>     |                |                                   |                      |
|  | 312423                                                             | <b>Classe I</b> |                | Surface, Indoor                   | Ø100 x H36           |
|                                                                                     | <b>Shopline Blanc Patère-alimentation</b>                          | <b>IP20</b>     |                |                                   |                      |