



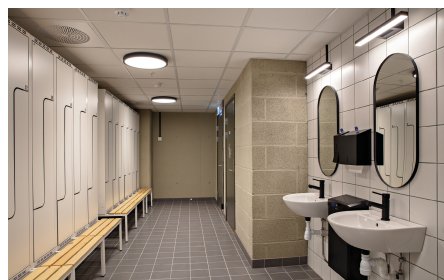

Energy efficient surface-mounted LED luminaire with a slim profile ensuring a modern look. Square and round available in multiple sizes and lumens. Opalprismatic diffuser provides a glare-free light. The luminaire is produced in a matt black or white powder-coated aluminium finish. Dimmable using a DALI or phase control dimmer. We recommend LEDDim 400 and LEDDim Smart. Simple installation with quick connections between fixture and back plate that can be screwed straight onto all known ceiling boxes. Visible cabling also possible. Also supplied with a sensor and/or emergency light.

Galerie de produits et d'environnements

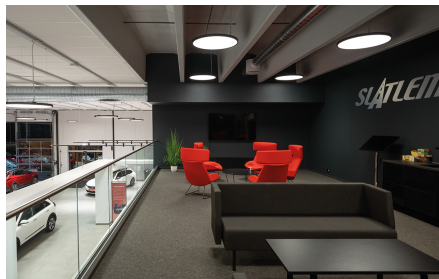

Article	Protection	Convertisseurs	Montage/Connexion	Dimensions
 606017 Disc 480 Noir 3140lm 2700K Ra>80 Coupure de phase 31W LED 101 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Coupure de phase	Surface, Indoor Bornier sans vis	Ø470 x H55
 606000 Disc 480 Blanc 3410lm 2700K Ra>80 Coupure de phase 31W LED 110 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Coupure de phase	Surface, Indoor Bornier sans vis	Ø470 x H55
 606024 Disc 480 Noir 3390lm 3000K Ra>80 DALI-2 30W LED 113 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	DALI-2	Surface, Indoor Bornier sans vis	Ø470 x H55
 606029 Disc 480 Noir 3390lm 3000K Ra>80 Secours 3H/coupure de phase 31W LED 109 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Secours 3H/coupure de phase	Surface, Indoor Bornier sans vis	Ø470 x H55
 606021 Disc 480 Noir 3390lm 3000K Ra>80 Sensor Dim 31W LED 109 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Sensor Dim	Surface, Indoor Bornier sans vis	Ø470 x H55
 606032 Disc 480 Noir 3390lm 3000K Ra>80 Sensor Dim Secours 31W LED 109 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Sensor Dim Secours	Surface, Indoor Bornier sans vis	Ø470 x H55

Article	Protection	Convertisseurs	Montage/Connexion	Dimensions
 606018 Disc 480 Noir 3390lm 3000K Ra>80 Coupure de phase 31W LED 109 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Coupure de phase	Surface, Indoor Bornier sans vis	Ø470 x H55
 606007 Disc 480 Blanc 3680lm 3000K Ra>80 DALI-2 / Push Dim 30W LED 123 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	DALI-2 / Push Dim	Surface, Indoor Bornier sans vis	Ø470 x H55
 606012  Disc 480 Blanc 3680lm 3000K Ra>80 Secours 3H/coupure de phase 31W LED 119 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Secours 3H/coupure de phase	Surface, Indoor Bornier sans vis	Ø470 x H55
 606004 Disc 480 Blanc 3680lm 3000K Ra>80 Sensor Dim 31W LED 119 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Sensor Dim	Surface, Indoor Bornier sans vis	Ø470 x H55
 606015  Disc 480 Blanc 3680lm 3000K Ra>80 Sensor Dim Secours 31W LED 119 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Sensor Dim Secours	Surface, Indoor Bornier sans vis	Ø470 x H55
 606001 Disc 480 480 Blanc 3680lm 3000K Ra>80 Coupure de phase 31W LED 119 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Coupure de phase	Surface, Indoor Bornier sans vis	Ø470 x H55

Article	Protection	Convertisseurs	Montage/Connexion	Dimensions
 606019 Disc 480 Noir 3490lm 4000K Ra>80 Coupure de phase 31W LED 113 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Coupure de phase	Surface, Indoor Bornier sans vis	Ø470 x H55
 606008 Disc 480 Blanc 3790lm 4000K Ra>80 DALI-2 / Push Dim 30W LED 126 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	DALI-2 / Push Dim	Surface, Indoor Bornier sans vis	Ø470 x H55
 606013 • Disc 480 Blanc 3790lm 4000K Ra>80 Secours 3H/coupure de phase 31W LED 122 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Secours 3H/coupure de phase	Surface, Indoor Bornier sans vis	Ø470 x H55
 606005 Disc 480 Blanc 3790lm 4000K Ra>80 Sensor Dim 31W LED 122 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Sensor Dim	Surface, Indoor Bornier sans vis	Ø470 x H55
 606016 • Disc 480 Blanc 3790lm 4000K Ra>80 Sensor Dim Secours 31W LED 122 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Sensor Dim Secours	Surface, Indoor Bornier sans vis	Ø470 x H55
 606002 Disc 480 480 Blanc 3790lm 4000K Ra>80 Coupure de phase 31W LED 122 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Coupure de phase	Surface, Indoor Bornier sans vis	Ø470 x H55

Article	Protection	Convertisseurs	Montage/Connexion	Dimensions
	606095 Disc/Frosta Noir Suspension Adaptateur			L5000 x W102 x H22
	606094 Disc/Frosta Blanc Suspension Adaptateur			L5000 x W102 x H22
	820307 Batterie pour éclairage de secours 3 Hours 3.0Ah - Model No: B093			L137 x W27 x H27

• = Cet article est produit sur commande, avec un délai de livraison prévu de 3-4 semaines.