

Sense Pro Connect 600x600



Sense Pro Connect is an energy-efficient LED panel with a slim frame for a clean, modern look. It features an integrated SG Connect sensor for smart, energy-efficient lighting control. The sensor switches the light on when motion is detected and off after a defined time period, delivering significant energy savings. A built-in daylight sensor can be activated to maintain the desired light level at all times. Configuration is simple via the SG Connect Commissioning App, and the panel can be used as a standalone unit or as part of a larger system that can easily be expanded or reconfigured as needed. Sense Pro Connect is a high-quality, all-round panel suitable for all kinds of environments. It can be installed in ceilings with exposed T-grids without accessories, and in ceilings with concealed T-grids using appropriate accessories.


Sense Pro Connect 600x600



Galerie de produits et d'environnements




Sense Pro Connect 600x600

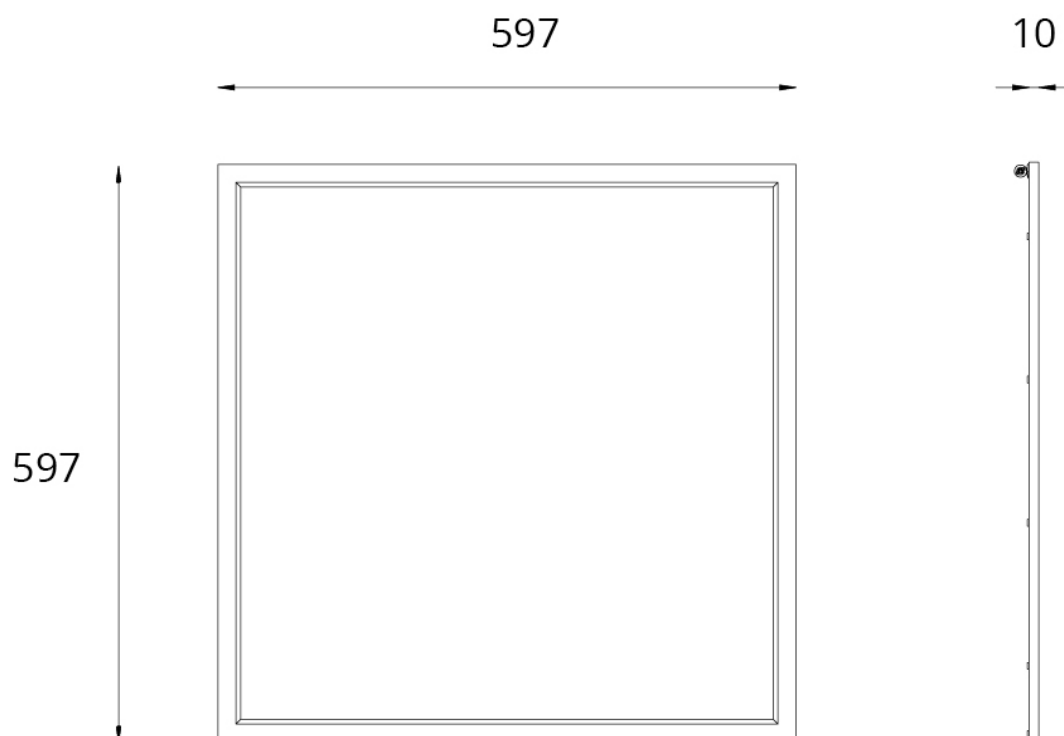

Pour les dimensions des dessins, veuillez consulter les codes de chaque article à la page suivante

Article	Protection	Convertisseurs	Montage/Connexion	Dimensions
 212684 Sense Pro Connect 600x600 Blanc 3000K Ra>80 Connect LED SDCM:3 L80/B20>100,000, L90>50,000 Beam: 110°, Directe, Opalprism	Classe III IP40/IP20	Connect	Encastré, Indoor Quick connector	L597 x W597 x H11
 212793 Sense Pro Connect 600x600 Blanc 3000K Ra>90 Connect LED SDCM:3 L80/B20>100,000, L90>50,000 Beam: 110°, Directe, Opalprism	Classe III IP40/IP20	Connect	Encastré, Indoor Quick connector	L597 x W597 x H11
 212685 Sense Pro Connect 600x600 Blanc 4000K Ra>80 Connect LED SDCM:3 L80/B20>100,000, L90>50,000 Beam: 110°, Directe, Opalprism	Classe III IP40/IP20	Connect	Encastré, Indoor Quick connector	L597 x W597 x H11
 212724 Sense Pro Connect 600x600 Blanc 4000K Ra>90 Connect LED SDCM:3 L80/B20>100,000, L90>50,000 Beam: 110°, Directe, Opalprism	Classe III IP40/IP20	Connect	Encastré, Indoor Quick connector	L597 x W597 x H11
Alimentation				
 820511 Kit d'Alimentation Capteur 25W 700mA Connect 25W 100,000	Classe II IP20	Connect	Encastré, Indoor Linect 3 pôles / bornier sans vis	L201 x W75 x H33
 820512 Kit d'Alimentation Capteur 32W 900mA Connect 32W 100,000	Classe II IP20	Connect	Encastré, Indoor Linect 3 pôles / bornier sans vis	L201 x W75 x H33

Article	Protection	Convertisseurs	Montage/Connexion	Dimensions
 820513 Kit d'Alimentation Capteur 38W 1050mA Connect 38W 100,000	Classe II IP20	Connect	Encastré, Indoor Linect 3 pôles / bornier sans vis	L201 x W75 x H33
Accessoires				
 212256 Sense 600x600 Blanc Unité de surface				L604 x W604 x H48
 212688 Sense Decor Sky Blanc 600x600				L597 x W597 x H79
 8249045006 Sense 600x600 Blanc Plaque de plâtre/Troldtekt Encadrement encastré				L640 x W640 x H40
 212170 Sense 2m Kit suspension				L2000
 8246094364 Boîtier d'éclairage de secours On-Off/Coupure de phase / EM Selvtest, Secours 3 heures				L270 x W75 x H35