

Disc 290 D/I




Disc 290 D/I is an energy efficient and stylish surface-mounted luminaire with a slim profile, providing any room with a modern and refined look. Opal prismatic diffuser ensures glare-free and comfortable lighting with a decorative indirect light. It is possible to choose between 3000K/4000K with the connection cable. Disc 290 D/I is produced in durable aluminium and polycarbonate. Installation is simple, thanks to the quick connection between the luminaire and the backplate, which can be mounted directly onto all standard ceiling boxes. Visible cabling also possible.

Disc 290 D/I



Galerie de produits et d'environnements

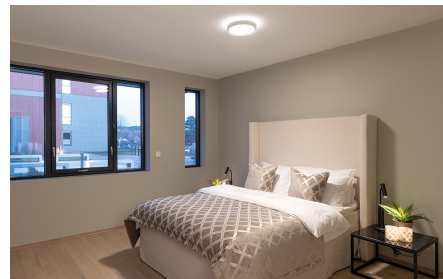

Article		Protection	Convertisseurs	Montage/Connexion	Dimensions
	606203 Disc 290 Noir D/I 1860lm 2700K Ra>80 Coupure de phase 18W LED 103 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Coupure de phase	Surface, Indoor Bornier sans vis	Ø290 x H62
	606202 Disc 290 Blanc D/I 1940lm 2700K Ra>80 Coupure de phase 18W LED 108 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Coupure de phase	Surface, Indoor Bornier sans vis	Ø290 x H62
	606207 Disc 290 Noir D/I 1840/1970lm 3000/4000K Ra>80 DALI-2 18W LED 102 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	DALI-2	Surface, Indoor Bornier sans vis	Ø290 x H62
	606211 Disc 290 Noir D/I 1840/1970lm 3000/4000K Ra>80 Sensor Dim 18W LED 102 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Sensor Dim	Surface, Indoor Bornier sans vis	Ø290 x H62
	606185 Disc 290 Noir D/I 1840/1970lm 3000/4000K Ra>80 Coupure de phase 18W LED 102/109 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Coupure de phase	Surface, Indoor Bornier sans vis	Ø290 x H62
	606206 Disc 290 Blanc D/I 2000/2140lm 3000/4000K Ra>80 DALI-2 18W LED 111 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	DALI-2	Surface, Indoor Bornier sans vis	Ø290 x H62

Article	Protection	Convertisseurs	Montage/Connexion	Dimensions
 606210 Disc 290 Blanc D/I 2000/2140lm 3000/4000K Ra>80 Sensor Dim 18W LED 111 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Sensor Dim	Surface, Indoor Bornier sans vis	Ø290 x H62
 606184 Disc 290 Blanc D/I 2000/2140lm 3000/4000K Ra>80 Coupure de phase 18W LED 111/119 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Coupure de phase	Surface, Indoor Bornier sans vis	Ø290 x H62
Accessoires				
 606095 Disc/Frosta Noir Suspension Adaptateur				L5000 x W102 x H22
 606094 Disc/Frosta Blanc Suspension Adaptateur				L5000 x W102 x H22