

Sense Basic Connect




Sense Basic Connect is a cost-effective LED panel that's ideal for both new installations and refurbishment projects. It features an integrated SG Connect sensor for smart, energy-efficient lighting control. The sensor switches the light on when motion is detected and off after a defined time period, delivering significant energy savings. A built-in daylight sensor can be activated to maintain the desired light level at all times. Configuration is simple via the SG Connect Commissioning App, and the panel can be used as a standalone unit or as part of a larger system that can easily be expanded or reconfigured as needed. Sense Basic Connect comes in a lightweight steel housing with a slim 36 mm profile and a back-lit design for even, comfortable illumination. Supplied in single packs for easy handling.

Sense Basic Connect



Galerie de produits et d'environnements



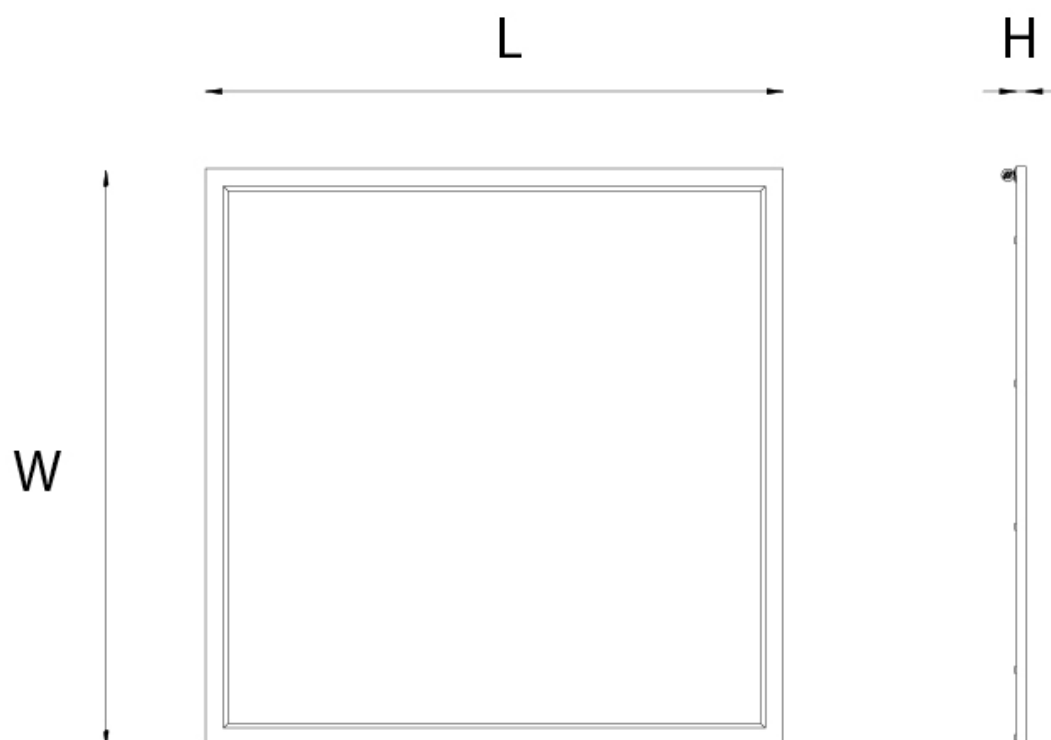

Pour les dimensions des dessins, veuillez consulter les codes de chaque article à la page suivante

Article		Protection	Convertisseurs	Montage/Connexion	Dimensions
	212706	Classe II SELV	Connect	Encastré, Indoor	L595 x W595 x H36
	Sense Basic 600x600 Blanc Incl	IP20		Linect 3 pôles / bornier sans vis	
	Alimentation 4320lm 3000K Ra>80				
	Connect				
	33W LED				
	131 lm/W SDCM:3				
	L80/B20>100,000				
	Directe, Opalprism				
	212707	Classe II SELV	Connect	Encastré, Indoor	L595 x W595 x H36
	Sense Basic 600x600 Blanc Incl	IP20		Linect 3 pôles / bornier sans vis	
	Alimentation 4390lm 4000K Ra>80				
	Connect				
	33W LED				
	133 lm/W SDCM:3				
	L80/B20>100,000				
	Directe, Opalprism				