


Prelude Square




Prelude Square is een spiegelarmatuur met een scherp ontwerp. Het armatuur biedt een zeer homogeen licht dat wordt gegenereerd door een specifieke LED-lenstechnologie, waardoor het de voor de hand liggende keuze is naast een spiegel. Daarom is het de ideale keuze voor badkamers en vergelijkbare omgevingen. Prelude Square is verkrijgbaar met of zonder stopcontact achter een opklapbaar deksel. Het armatuur kan worden gedimd door fase afsnijding. PIR-versies met daglicht- en bewegingsdetectie zijn ook verkrijgbaar. De lichtopbrengst kan worden aangepast met een dipswitch op de driver. Voor de versie zonder stopcontact en/of PIR Sensor is een cover verkrijgbaar als accessoire. Deze richt het licht omhoog en omlaag, waardoor het ideaal is voor omgevingen waar meer indirecte verlichting gewenst is.

Prelude Square

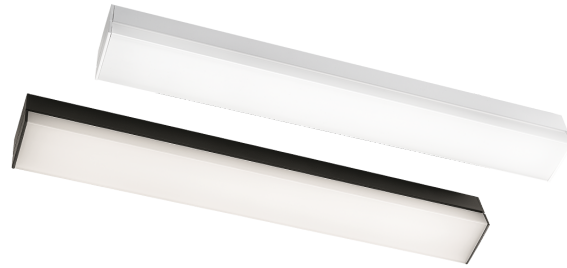

Product- en omgevingsbeelden

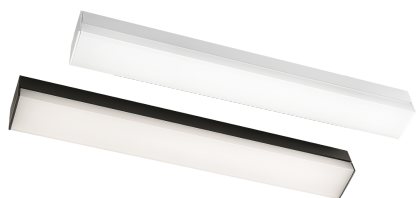

Artikel	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
 111384 Prelude Square Zwart met stopcontact 1460lm 2700K Ra>90 Fase afsnijding 13W LED 112 lm/W SDCM:3 L80/B10>100,000 Direct, Acrylic diffuser	Klasse I IP44 (mounted horizontally) / IP40 (mounted vertically) IK05	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	W590 x H59 x D62
 111388 Prelude Square Zwart 1490lm 2700K Fase afsnijding 16W LED 93 lm/W Direct, Acrylic diffuser	Klasse II IP44 (mounted horizontally) / IP40 (mounted vertically) IK05	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	W519 x H59 x D62
 111374 Prelude Square Wit 1530lm 2700K Ra>90 PIR Sensor 13W LED 118 lm/W SDCM:3 L80/B10>100,000 Direct, Acrylic diffuser	Klasse II IP44 (mounted horizontally) / IP40 (mounted vertically) IK05	PIR Sensor	Opbouw, Indoor Schroefloos klemmenblok	W615 x H59 x D62
 111378 Prelude Square Wit met stopcontact 1530lm 2700K Ra>90 PIR Sensor 13W LED 118 lm/W SDCM:3 L80/B10>100,000 Direct, Acrylic diffuser	Klasse I IP44 (mounted horizontally) / IP40 (mounted vertically) IK05	PIR Sensor	Opbouw, Indoor Schroefloos klemmenblok	W686 x H59 x D62
 111370 Prelude Square Wit 1530lm 2700K Ra>90 Fase afsnijding 13W LED 118 lm/W SDCM:3 L80/B10>100,000 Direct, Acrylic diffuser	Klasse II IP44 (mounted horizontally) / IP40 (mounted vertically) IK05	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	W519 x H59 x D62
 111372 Prelude Square Wit met stopcontact 1530lm 2700K Ra>90 Fase afsnijding 13W LED 118 lm/W SDCM:3 L80/B10>100,000	Klasse I IP44 (mounted horizontally) / IP40 (mounted vertically) IK05	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	W590 x H59 x D62

Artikel	Direct, Acrylic diffuser	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
	111410 Prelude Square 1200 Wit 2700lm 2700K Ra>90 Fase afsnijding 22W LED 123 lm/W SDCM:3 L90/B10>, L80/B10>100,000 Direct, Acrylic diffuser	Klasse II IP44 (mounted horizontally) / IP40 (mounted vertically) IK05	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	W1196 x H60 x D52
	111390 Prelude Square Zwart 1550lm 3000K Ra>90 Fase afsnijding 13W LED 119 lm/W SDCM:3 L80/B10>100,000 Direct, Acrylic diffuser	Klasse II IP44 (mounted horizontally) / IP40 (mounted vertically) IK05	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	W519 x H59 x D62
	111397 Prelude Square Zwart met stopcontact 1550lm 3000K Ra>90 Fase afsnijding 13W LED 119 lm/W SDCM:3 L80/B10>100,000 Direct, Acrylic diffuser	Klasse II IP44 (mounted horizontally) / IP40 (mounted vertically) IK05	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	W590 x H59 x D62
	111381 Prelude Square Wit 1620lm 3000K Ra>90 DALI-2 13W LED 125 lm/W SDCM:3 L80/B10>100,000 Direct, Acrylic diffuser	Klasse I IP44 (mounted horizontally) / IP40 (mounted vertically) IK05	DALI-2	Opbouw, Indoor Schroefloos klemmenblok	W519 x H59 x D62
	111375 Prelude Square Wit 1620lm 3000K Ra>90 PIR Sensor 13W LED 125 lm/W SDCM:3 L80/B10>100,000 Direct, Acrylic diffuser	Klasse II IP44 (mounted horizontally) / IP40 (mounted vertically) IK05	PIR Sensor	Opbouw, Indoor Schroefloos klemmenblok	W615 x H59 x D62
	111379 Prelude Square Wit met stopcontact 1620lm 3000K Ra>90 PIR Sensor 13W LED 125 lm/W SDCM:3 L80/B10>100,000 Direct, Acrylic diffuser	Klasse I IP44 (mounted horizontally) / IP40 (mounted vertically) IK05	PIR Sensor	Opbouw, Indoor Schroefloos klemmenblok	W686 x H59 x D62

Artikel	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
	111371 Prelude Square Wit 1620lm 3000K Ra>90 Fase afsnijding 13W LED 125 lm/W SDCM:3 L80/B10>100,000 Direct, Acrylic diffuser	Klasse II IP44 (mounted horizontally) / IP40 (mounted vertically) IK05	Fase afsnijding Opbouw, Indoor Schroefloos klemmenblok	W519 x H59 x D62
	111373 Prelude Square Wit met stopcontact 1620lm 3000K Ra>90 Fase afsnijding 13W LED 125 lm/W SDCM:3 L80/B10>100,000 Direct, Acrylic diffuser	Klasse I IP44 (mounted horizontally) / IP40 (mounted vertically) IK05	Fase afsnijding Opbouw, Indoor Schroefloos klemmenblok	W590 x H59 x D62
	111411 Prelude Square 1200 Wit 2860lm 3000K Ra>90 Fase afsnijding 22W LED 130 lm/W SDCM:3 L90/B10>, L80/B10>100,000 Direct, Acrylic diffuser	Klasse II IP44 (mounted horizontally) / IP40 (mounted vertically) IK05	Fase afsnijding Opbouw, Indoor Schroefloos klemmenblok	W1196 x H60 x D52
	111386 Prelude Square Wit 1700lm 4000K Ra>90 PIR Sensor 13W LED 131 lm/W SDCM:3 L80/B10>100,000 Direct, Acrylic diffuser	Klasse II IP44 (mounted horizontally) / IP40 (mounted vertically) IK05	PIR Sensor Opbouw, Indoor Schroefloos klemmenblok	W615 x H59 x D62
	111387 Prelude Square Wit met stopcontact 1700lm 4000K Ra>90 PIR Sensor 13W LED 131 lm/W SDCM:3 L80/B10>100,000 Direct, Acrylic diffuser	Klasse I IP44 (mounted horizontally) / IP40 (mounted vertically) IK05	PIR Sensor Opbouw, Indoor Schroefloos klemmenblok	W686 x H59 x D62
	111380 Prelude Square Wit 1700lm 4000K Ra>90 Fase afsnijding 13W LED 131 lm/W SDCM:3 L80/B10>100,000 Direct, Acrylic diffuser	Klasse II IP44 (mounted horizontally) / IP40 (mounted vertically) IK05	Fase afsnijding Opbouw, Indoor Schroefloos klemmenblok	W519 x H59 x D62



Accessoires		
	111389 Prelude Square Zwart Cover	W522 x H62 x D56
	111385 Prelude Square Wit Cover	W522 x H62 x D56
	3950 Prelude Square 600 Diffuser	L513 x W60 x H25
	111418 Prelude Square 1200 Diffuser	L100 x W60 x H28