



Sense Surface

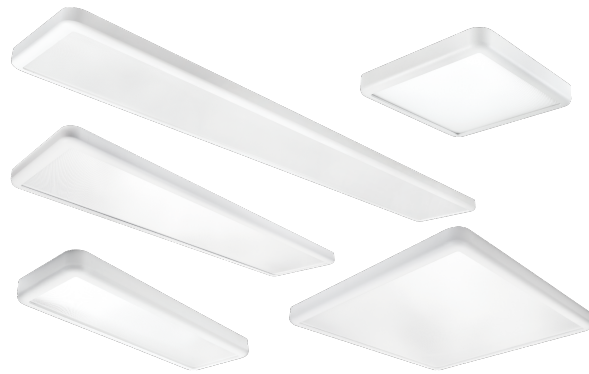

Sense Surface is an elegant, thin surface mounted luminaire, illuminated by a side light LED solution. Easy tool-free installation, with quick connector between bracket and the front is held by strong magnets with restraining strap. An innovative mechanism lets you choose whether the front should be totally flush with the ceiling for hidden cabling or floating slightly below for surface cabling.

Product- en omgevingsbeelden

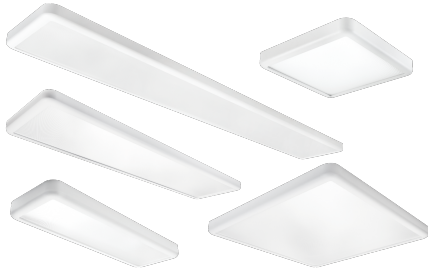

Artikel	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
 212348 Sense Surface 640x200 Wit 1830lm 2700K Ra>80 PIR Sensor 18W LED 102 lm/W SDCM:3 L80/B20>100,000 Direct, Opalprisma	Klasse II IP20 IK10	PIR Sensor	Opbouw, Indoor Schroefloos klemmenblok	L642 x W202 x H45
 212374 Sense Surface 640x200 Wit 1830lm 2700K Ra>80 Fase afsnijding 18W LED 102 lm/W SDCM:3 L80/B20>100,000 Direct, Opalprisma	Klasse II IP20 IK10	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	L642 x W202 x H45
 212350 Sense Surface 600x600 Zwart 3770lm 3000K Ra>80 Fase afsnijding 30W LED 126 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	Klasse II IP20 IK10	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	L597 x W597 x H45
 212351 Sense Surface 300x1200 Zwart 3690lm 3000K Ra>80 Fase afsnijding 30W LED 123 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	Klasse II IP20 IK10	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	L1202 x W302 x H45
 212331 Sense Surface 600x600 Wit 3640lm 3000K Ra>80 DALI-2 / Push Dim 28W LED 130 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	Klasse II IP20 IK10	DALI-2 / Push Dim	Opbouw, Indoor Schroefloos klemmenblok	L597 x W597 x H45
 212361 Sense Surface 300x1200 Wit 3790lm 3000K Ra>80 DALI-2 / Push Dim 29W LED 131 lm/W SDCM:3 L80/B20>100,000, L90>50,000	Klasse II IP20 IK10	DALI-2 / Push Dim	Opbouw, Indoor Schroefloos klemmenblok	L1202 x W302 x H45

Artikel	Direct, Opalprisma	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
	212344 Sense Surface 600x600 Wit 3640lm 3000K Ra>80 PIR Sensor 28W LED 130 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	Klasse II IP20 IK10	PIR Sensor	Opbouw, Indoor Schroefloos klemmenblok	L597 x W597 x H45
	212346 Sense Surface 300x1200 Wit 3790lm 3000K Ra>80 PIR Sensor 29W LED 131 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	Klasse II IP20 IK10	PIR Sensor	Opbouw, Indoor Schroefloos klemmenblok	L1202 x W302 x H45
	212349 Sense Surface 640x200 Wit 1910lm 3000K Ra>80 PIR Sensor 18W LED 106 lm/W SDCM:3 L80/B20>100,000 Direct, Opalprisma	Klasse II IP20 IK10	PIR Sensor	Opbouw, Indoor Schroefloos klemmenblok	L642 x W202 x H45
	212330 Sense Surface 600x600 Wit 3640lm 3000K Ra>80 Fase afsnijding 28W LED 130 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	Klasse II IP20 IK10	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	L597 x W597 x H45
	212360 Sense Surface 300x1200 Wit 3790lm 3000K Ra>80 Fase afsnijding 29W LED 131 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	Klasse II IP20 IK10	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	L1202 x W302 x H45
	212375 Sense Surface 640x200 Wit 1910lm 3000K Ra>80 Fase afsnijding 18W LED 106 lm/W SDCM:3 L80/B20>100,000 Direct, Opalprisma	Klasse II IP20 IK10	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	L642 x W202 x H45

Artikel		Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
	212392	Klasse II	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	L1582 x W302 x H45
	Sense Surface 300x1600 Wit 4910lm 3000K Ra>80 Fase afsnijding 38W LED 129 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	IP20 IK10			
	212394	Klasse II	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	L370 x W370 x H45
	Sense Surface 370x370 Wit 1980lm 3000K Ra>80 Fase afsnijding 17W LED 116 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	IP20 IK10			
	212403	Klasse II	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	L597 x W597 x H45
	Sense Surface 600x600 Zwart 4010lm 4000K Ra>80 Fase afsnijding 30W LED 134 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	IP20 IK10			
	212404	Klasse II	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	L1202 x W302 x H45
	Sense Surface 300x1200 Zwart 4000K Ra>80 Fase afsnijding 30W LED 129 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	IP20 IK10			
	212338	Klasse II	DALI-2 / Push Dim	Opbouw, Indoor Schroefloos klemmenblok	L597 x W597 x H45
	Sense Surface 600x600 Wit 4000K Ra>80 DALI-2 / Push Dim 28W LED 138 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	IP20 IK10			
	212368	Klasse II	DALI-2 / Push Dim	Opbouw, Indoor Schroefloos klemmenblok	L1202 x W302 x H45
	Sense Surface 300x1200 Wit 3980lm 4000K Ra>80 DALI-2 / Push Dim 29W LED 137 lm/W SDCM:3 L80/B20>100,000, L90>50,000	IP20 IK10			

Artikel	Direct, Opalprisma	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
	212345 Sense Surface 600x600 Wit 4000K Ra>80 PIR Sensor 28W LED 138 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	Klasse II IP20 IK10	PIR Sensor	Opbouw, Indoor Schroefloos klemmenblok	L597 x W597 x H45
	212347 Sense Surface 300x1200 Wit 3980lm 4000K Ra>80 PIR Sensor 29W LED 137 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	Klasse II IP20 IK10	PIR Sensor	Opbouw, Indoor Schroefloos klemmenblok	L1202 x W302 x H45
	212326 Sense Surface 640x200 Wit 2030lm 4000K Ra>80 Fase afsnijding 18W LED 113 lm/W SDCM:3 L80/B20>100,000 Direct, Opalprisma	Klasse II IP20 IK10	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	L642 x W202 x H45
	212337 Sense Surface 600x600 Wit 4000K Ra>80 Fase afsnijding 28W LED 138 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	Klasse II IP20 IK10	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	L597 x W597 x H45
	212367 Sense Surface 300x1200 Wit 3980lm 4000K Ra>80 Fase afsnijding 29W LED 137 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	Klasse II IP20 IK10	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	L1202 x W302 x H45
	212399 Sense Surface 300x1600 Wit 5240lm 4000K Ra>80 Fase afsnijding 38W LED 138 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	Klasse II IP20 IK10	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	L1582 x W302 x H45

Accessoires

	212255 T-profil Wit Ophangrail 600mm	L596 x W35 x H17
	212234 Sense Surface/Disc 760 2m Pendelkit	L2000
	820307 Noodverlichting batterij 3 Hours 3.0Ah - Model No: B093	L137 x W27 x H27