

Sense 300x300





Sense luminaire used as replacement or alternative for a normal downlight. Very low profile and quick connection between luminaire and driver as well as tool-free connection in junction box with loop for easy and quick installation. High efficiency up to 95 lm/W and low glare rating makes Sense the obvious choice in many applications.

Sense 300x300



Product- en omgevingsbeelden

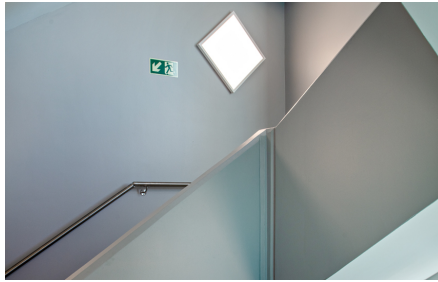

Artikel	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen	
	212145	Klasse II SELV	DALI-2 / Push Dim	Inbouw, Indoor	L300 x W300 x H25
	Sense 300X300 Wit 2330lm 3000K	IP40/IP20		5-polige Linect / schroefloos	
	Ra>80 DALI-2 / Push Dim	IK08		klemmenblok	
	20W LED				
	117 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opaal				
	212140	Klasse II SELV	Fase afsnijding	Inbouw, Indoor	L300 x W300 x H25
	Sense 300X300 Wit 2330lm 3000K	IP40/IP20		Schroefloos klemmenblok	
	Ra>80 Fase afsnijding	IK08			
	20W LED				
	117 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opaal				
	212274	Klasse II SELV	DALI-2 / Push Dim	Inbouw, Indoor	L300 x W300 x H25
	Sense 300X300 Wit 2480lm 4000K	IP40/IP20		5-polige Linect / schroefloos	
	Ra>80 DALI-2 / Push Dim	IK08		klemmenblok	
	20W LED				
	124 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opaal				
	212273	Klasse II SELV	Fase afsnijding	Inbouw, Indoor	L300 x W300 x H25
	Sense 300X300 Wit 2480lm 4000K	IP40/IP20			
	Ra>80 Fase afsnijding	IK08			
	20W LED				
	124 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opaal				
Accessoires					
	820489				L220 x W75 x H34
	Sensor Dim Box Wit 200VA				
	8246094364				L270 x W75 x H35
	Noodbox On-Off/Fase afsnijding / EM Self test, Nood 3h				
	8246094500				L270 x W75 x H35
	Noodbox Driver DALI / EM DALI/Self test, Nood 3h				