

Sense Round TW





Sense luminaire used as replacement or alternative for a normal downlight. Very low profile and quick connection between luminaire and driver as well as tool-free connection in junction box with loop for easy and quick installation. High efficiency up to 105 lm/W and low glare rating makes Sense the obvious choice in many applications. Tunable White 2700-6500K LED Dim or DALI Type 8.

Sense Round TW





Product- en omgevingsbeelden

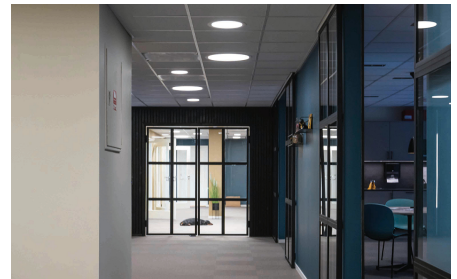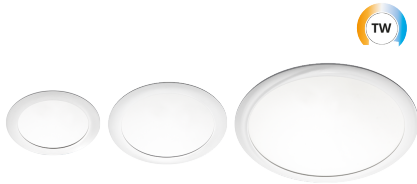

Artikel	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
	Klasse II SELV IP40/IP20 IK08	TW DALI Type 8	Inbouw, Indoor	Ø255
212302 Sense TW Wit 255 IsoSafe 1270lm 2700-6500K Ra>80 TW DALI Type 8 15W LED 85 lm/W SDCM:3 L80/B20>50,000, L90>50,000 Direct, Opaal				
	Klasse II SELV IP40/IP20 IK08	TW DALI Type 8	Inbouw, Indoor	Ø320
212304 Sense TW Wit 320 IsoSafe 1610lm 2700-6500K Ra>80 TW DALI Type 8 19W LED 85 lm/W SDCM:3 L80/B20>100.000 (50.000 as IsoSafe), L90>50,000 Direct, Opaal				
	Klasse II SELV IP40/IP20 IK08	TW DALI Type 8	Inbouw, Indoor	Ø495 x H29
212306 Sense TW Wit 495 3290lm 2700-6500K Ra>80 TW DALI Type 8 36W LED 91 lm/W SDCM:3 L80/B20>50,000, L90>50,000 Direct, Opaal				
	Klasse II SELV IP40/IP20 IK08	TW LEDDim	Inbouw, Indoor	Ø255
212301 Sense TW Wit 255 IsoSafe 1270lm 2700-6500K Ra>80 TW LEDDim 15W LED 85 lm/W SDCM:3 L80/B20>100.000 (50.000 as IsoSafe), L90>50,000 Direct, Opaal				
	Klasse II SELV IP40/IP20 IK08	TW LEDDim	Inbouw, Indoor	Ø320
212303 Sense TW Wit 320 IsoSafe 1830lm 2700-6500K Ra>80 TW LEDDim 19W LED 96 lm/W SDCM:3 L80/B20>50,000, L90>50,000 Direct, Opaal				
	Klasse II SELV IP40/IP20 IK08	TW LEDDim	Inbouw, Indoor	Ø495 x H29
212305 Sense TW Wit 495 3770lm (@6500K) 2700-6500K Ra>80 TW LEDDim 36W LED 105 lm/W SDCM:3 L80/B20>50,000, L90>50,000 Direct, Opaal				



Accessoires		
	8246094364 Noodbox On-Off/Fase afsnijding / EM Self test, Nood 3h	L270 x W75 x H35
	8246094500 Noodbox Driver DALI / EM DALI/Self test, Nood 3h	L270 x W75 x H35