



Soft Square

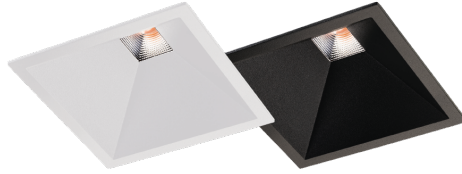

Soft Square is a unique downlight with a pure square shape to fit in modern environments, both residential and commercial. It provides a wide light distribution with a sharp shape. The recessed light source in the black baffle gives an exclusive glare free appearance with harmonious, flicker free light and excellent colour rendering. Soft Square is made for square holes but by using additional frames it can also be installed in round holes.

Product- en omgevingsbeelden



Artikel	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
 903252 Soft Square Zwart 880lm 2700K Ra 98 DALI-2 / Push Dim 12W LED 73 lm/W SDCM:1 L80/B10>100,000 Beam: 60°, Direct, Reflector	Klasse II SELV IP43/IP20 IK10	DALI-2 / Push Dim	Inbouw, Indoor 5-polige Linect / schroefloos klemmenblok	L95 x W95 x H58 x D57
 903250 Soft Square Zwart 880lm 2700K Ra 98 Fase afsnijding 12W LED 73 lm/W SDCM:1 L80/B10>100,000 Beam: 60°, Direct, Reflector	Klasse II SELV IP43/IP20 IK10	Fase afsnijding	Inbouw, Indoor Schroefloos klemmenblok	L95 x W95 x H58 x D57
 903262 Soft Square Wit 900lm 2700K Ra 98 DALI-2 / Push Dim 12W LED 75 lm/W SDCM:1 L80/B10>100,000 Beam: 60°, Direct, Reflector	Klasse II SELV IP43/IP20 IK10	DALI-2 / Push Dim	Inbouw, Indoor 5-polige Linect / schroefloos klemmenblok	L95 x W95 x H58 x D57
 903260 Soft Square Wit 900lm 2700K Ra 98 Fase afsnijding 12W LED 75 lm/W SDCM:1 L80/B10>100,000 Beam: 60°, Direct, Reflector	Klasse II SELV IP43/IP20 IK10	Fase afsnijding	Inbouw, Indoor Schroefloos klemmenblok	L95 x W95 x H58 x D57
 903253 Soft Square Zwart 890lm 3000K Ra 98 DALI-2 / Push Dim 12W LED 74 lm/W SDCM:1 L80/B10>100,000 Beam: 60°, Direct, Reflector	Klasse II SELV IP43/IP20 IK10	DALI-2 / Push Dim	Inbouw, Indoor 5-polige Linect / schroefloos klemmenblok	L95 x W95 x H58 x D57
 903251 Soft Square Zwart 890lm 3000K Ra 98 Fase afsnijding 12W LED 74 lm/W SDCM:1 L80/B10>100,000 Beam: 60°, Direct, Reflector	Klasse II SELV IP43/IP20 IK10	Fase afsnijding	Inbouw, Indoor Schroefloos klemmenblok	L95 x W95 x H58 x D57

Artikel	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
	903263	Klasse II SELV	DALI-2 / Push Dim	Inbouw, Indoor
	Soft Square Wit 910lm 3000K Ra 98 DALI-2 / Push Dim 12W LED 76 lm/W SDCM:1 L80/B10>100,000 Beam: 60°, Direct, Reflector	IP43/IP20 IK10	5-polige Linect / schroefloos klemmenblok	L95 x W95 x H58 x D57
	903261	Klasse II SELV	Fase afsnijding	Inbouw, Indoor
	Soft Square Wit 910lm 3000K Ra 98 Fase afsnijding 12W LED 76 lm/W SDCM:1 L80/B10>100,000 Beam: 60°, Direct, Reflector	IP43/IP20 IK10	Schroefloos klemmenblok	L95 x W95 x H58 x D57
Accessoires				
	903256			L140 x W140 x H4
	Soft Square Zwart 1X Montuur voor Soft Square, Junistar Lux Square & Junistar Square Isosafe DimToWarm			
	903257			L258 x W140 x H4
	Soft Square Zwart 2X Montuur voor Soft Square, Junistar Lux Square & Junistar Square Isosafe DimToWarm			
	903259			L376 x W140 x H4
	Soft Square Zwart 3X Montuur voor Soft Square, Junistar Lux Square & Junistar Square Isosafe DimToWarm			
	903267			L95 x W95 x H13
	Soft Square Zwart Spacer			
	903254			L140 x W140 x H4
	Soft Square Wit 1X Montuur voor Soft Square, Junistar Lux Square & Junistar Square Isosafe DimToWarm			
	903255			L258 x W140 x H4
	Soft Square Wit 2X Montuur voor Soft Square, Junistar Lux Square & Junistar Square Isosafe DimToWarm			
	903258			L376 x W140 x H4
	Soft Square Wit 3X Montuur voor Soft Square, Junistar Lux Square & Junistar Square Isosafe DimToWarm			
	903266			L95 x W95 x H13
	Soft Square Wit Spacer			

Artikel	Bescherming	Regelapparaatuu r	Montage/Aansluiting	Afmetingen
 820090 Noodbox Adapter kit voor downlight				L250 x W13 x H13
 8246094364 Noodbox On-Off/Fase afsnijding / EM Self test, Nood 3h				L270 x W75 x H35
 8246094500 Noodbox Driver DALI / EM DALI/Self test, Nood 3h				L270 x W75 x H35