

Uniled IsoSafe Blade




Attractive downlight for indoor and outdoor use. Certified Airtight from below via membrane between ceiling and downlight ring and mounting directly in insulation. Well integrated LED chip, dimmable via phase-dimming or DALI driver (not IsoSafe). Made of die-cast powder-coated aluminium or brushed steel (only indoors), glass diffuser. 42-degree scattering angle via reflector. 35 mm in total height, Flexible hole dimensions Ø76–Ø83. Tool-free mounting in mounting box for direct 230 V with loopable quick clips and automatic strain relief. IP54, KL II.


Uniled IsoSafe Blade



Product- en omgevingsbeelden

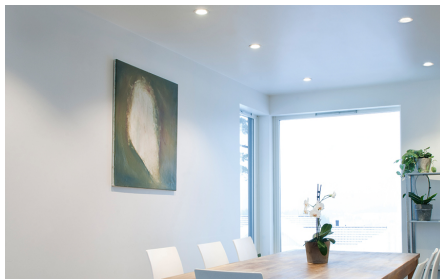

Uniled IsoSafe Blade

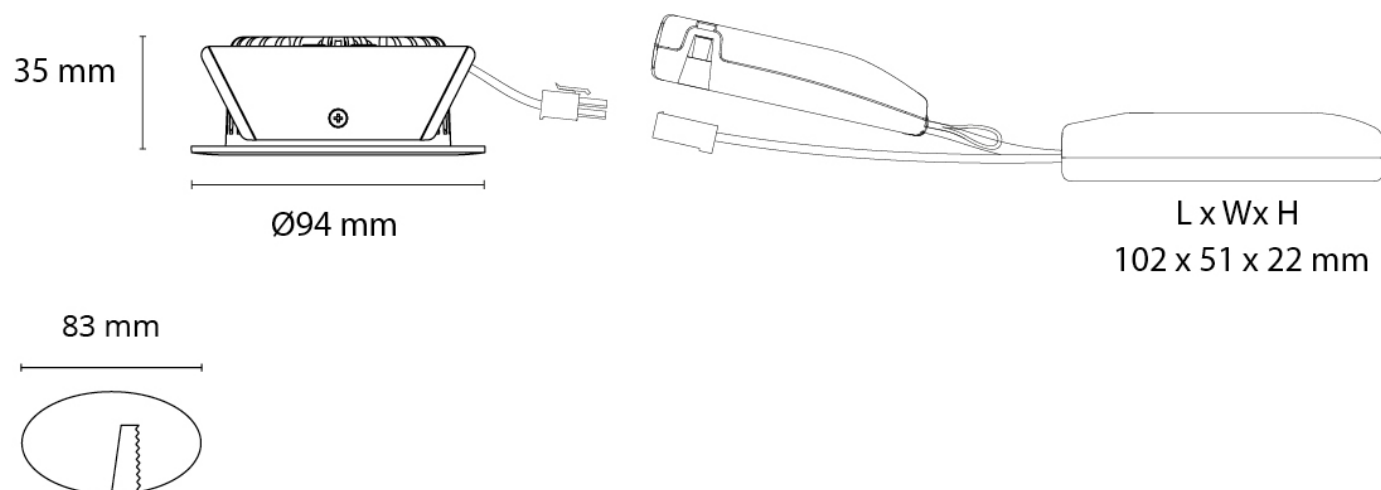

De afmetingen van de lijntekening vindt u bij de afzonderlijke artikelcodes op de volgende pagina

Artikel	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
 904335 UniLED IsoSafe Blade Zwart 660lm 2700K Ra 98 Fase afsnijding 8.5W LED 78 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Reflector	Klasse II SELV IP54/IP20	Fase afsnijding	Inbouw, Indoor / Outdoor Schroefloos klemmenblok	Ø94 x H37
 904334 UniLED IsoSafe Blade Wit 670lm 2700K Ra 98 Fase afsnijding 8.5W LED 79 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Reflector	Klasse II SELV IP54/IP20	Fase afsnijding	Inbouw, Indoor / Outdoor Schroefloos klemmenblok	Ø94 x H37
 904333 UniLED IsoSafe Blade Zwart 680lm 3000K Ra 98 Fase afsnijding 8.5W LED 80 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Reflector	Klasse II SELV IP54/IP20	Fase afsnijding	Inbouw, Indoor / Outdoor Schroefloos klemmenblok	Ø94 x H37
 904332 UniLED IsoSafe Blade Geborsteld Staal 690lm 3000K Ra 98 Fase afsnijding 8.5W LED 81 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Reflector	Klasse II SELV IP54/IP20	Fase afsnijding	Inbouw, Indoor Schroefloos klemmenblok	Ø94 x H37
 904331 UniLED IsoSafe Blade Wit 690lm 3000K Ra 98 Fase afsnijding 8.5W LED 81 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Reflector	Klasse II SELV IP54/IP20	Fase afsnijding	Inbouw, Indoor / Outdoor Schroefloos klemmenblok	Ø94 x H37
Accessoires				
 820090 Noodbox Adapter kit voor downlight				L250 x W13 x H13



Artikel	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
	8246094364 Noodbox On-Off/Fase afsnijding / EM Self test, Nood 3h	r		L270 x W75 x H35