

Zip Tube Micro




Slim, precise spotlight for Zip 230V tracking system. The luminaire has a minimalist, exclusive look. The black bezel ring reduces glare; the white one reflects more light, and the gold-coloured one provides a warmer light. Zip Tube Micro comes with a black bezel as standard, with low glare. Other bezels in white and gold are available as accessory. This allows for creative individual designs. The black bezel has low glare, the gold gives a warmer light, and the white reflects the most.


Zip Tube Micro



Product- en omgevingsbeelden

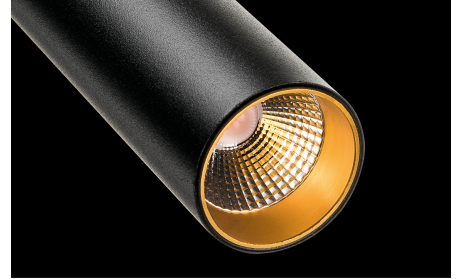

Zip Tube Micro

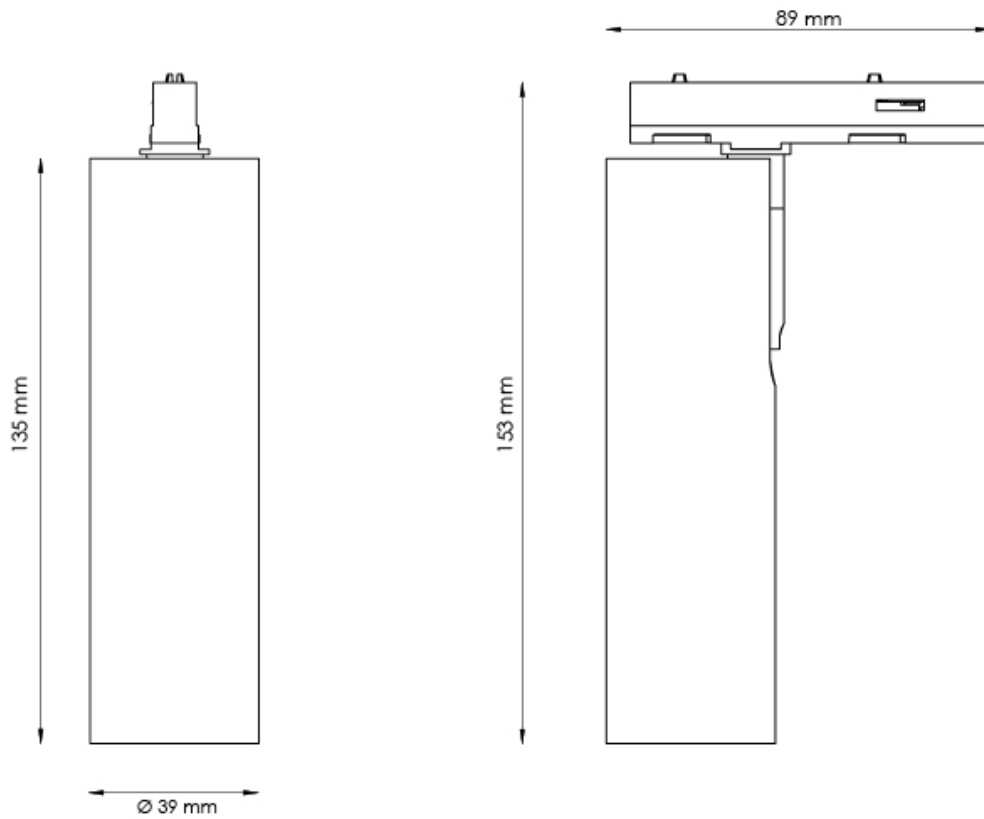

De afmetingen van de lijntekening vindt u bij de afzonderlijke artikelcodes op de volgende pagina

Artikel	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
	320607	Klasse II	Fase afsnijding	Opbouw, Indoor
	Zip Tube Micro Zwart DimToWarm	IP20	Zip rail (adapter inbegrepen)	L135 x W39 x H135
	340lm 2000-2800K Ra>95 Fase afsnijding			
	7W LED			
	49 lm/W SDCM:3			
	L90/B10>50,000			
	320872	Klasse II	Fase afsnijding	Opbouw, Indoor
	Zip Tube Micro Messing	IP20	Zip rail (adapter inbegrepen)	L135 x W39 x H135
	DimToWarm 340lm 2000-2800K			
	Ra>95 Fase afsnijding			
	7W LED			
	49 lm/W SDCM:3			
	320603	Klasse II	Fase afsnijding	Opbouw, Indoor
	Zip Tube Micro Wit DimToWarm	IP20	Zip rail (adapter inbegrepen)	L135 x W39 x H135
	340lm 2000-2800K Ra>95 Fase afsnijding			
	7W LED			
	49 lm/W SDCM:3			
	L90/B10>50,000			
	320604	Klasse II	Fase afsnijding	Opbouw, Indoor
	Zip Tube Micro Zwart 360lm 2700K	IP20	Zip rail (adapter inbegrepen)	L135 x W39 x H135
	Ra 98 Fase afsnijding			
	7W LED			
	51 lm/W SDCM:2			
	L90/B10>50,000			
	320870	Klasse II	Fase afsnijding	Opbouw, Indoor
	Zip Tube Micro Messing 360lm	IP20	Zip rail (adapter inbegrepen)	L135 x W39 x H135
	2700K Ra 98 Fase afsnijding			
	7W LED			
	51 lm/W SDCM:2			
	L90/B10>50,000			
	320600	Klasse II	Fase afsnijding	Opbouw, Indoor
	Zip Tube Micro Wit 360lm 2700K Ra	IP20	Zip rail (adapter inbegrepen)	L135 x W39 x H135
	98 Fase afsnijding			
	7W LED			
	51 lm/W SDCM:2			
	L90/B10>50,000			

Artikel	Beam: 40°, Direct, Reflector medium	Bescherming	Regelapparaatuu r	Montage/Aansluiting	Afmetingen		
	320605	Klasse II	Fase afsnijding	Opbouw, Indoor Zip rail (adapter inbegrepen)	L135 x W39 x H135		
	Zip Tube Micro Zwart 370lm 3000K	IP20					
	Ra 98 Fase afsnijding						
	7W LED						
	53 lm/W SDCM:2						
	L90/B10>50,000						
	Beam: 40°, Direct, Reflector medium						
	320871	Klasse II	Fase afsnijding	Opbouw, Indoor Zip rail (adapter inbegrepen)	L135 x W39 x H135		
	Zip Tube Micro Messing 370lm	IP20					
	3000K Ra 98 Fase afsnijding						
	7W LED						
	53 lm/W SDCM:2						
L90/B10>50,000							
	Beam: 40°, Direct, Reflector medium						
	320601	Klasse II	Fase afsnijding	Opbouw, Indoor Zip rail (adapter inbegrepen)	L135 x W39 x H135		
	Zip Tube Micro Wit 370lm 3000K Ra	IP20					
	98 Fase afsnijding						
	7W LED						
	53 lm/W SDCM:2						
L90/B10>50,000							
	Beam: 40°, Direct, Reflector medium						
	320681				Ø37 x H11		
	Tube Micro Zwart Ø39 Frontring						
		320682				Ø37 x H11	
		Tube Micro Goud Ø39 Frontring					
			320756				Ø39 x H21
Tube Micro Opaal 10mm Decoration ring							
			320680				Ø37 x H11
			Tube Micro Wit Ø39 Frontring				