



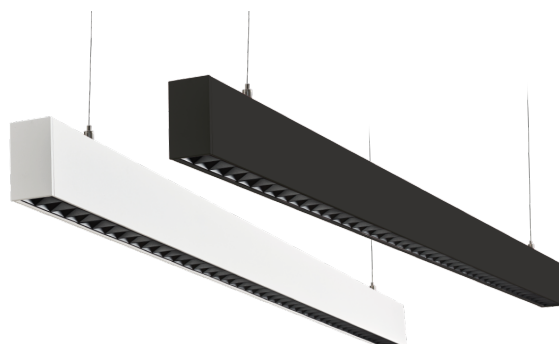

Ultra modern, slim luminaires with powder-coated outer surface. The cubist black reflectors provide extremely good glare control in direct light. Additionally, it features indirect light which means it is perfectly suited for offices and above desks. If you want to position several luminaires in a row, they can easily be connected together with the supplied coupling piece. Plug and play solution for quick installation.

Product- en omgevingsbeelden

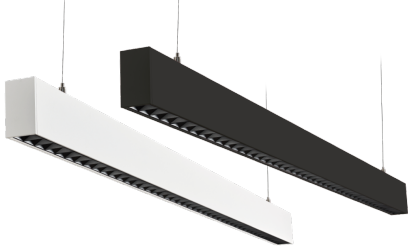

Artikel	Bescherming	Regelapparatuur	Montage/Aansluiting	Afmetingen
 212876 Inspire Zwart 3470lm 2700K Ra>90 Fase afsnijding 32W LED 108 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct/Indirect 50/50%, Cubic Optic Noir	Klasse I IP20	Fase afsnijding	Ophanging, Indoor 2 X 2 m kabelkit Kabel 3x0,75mm² 2,5m	L1241 x W38 x H67
 212087 Inspire Zwart 4140lm 3000K Ra>80 DALI-2 / Push Dim 34W LED 122 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct/Indirect 50/50%, Cubic Optic Noir	Klasse I IP20	DALI-2 / Push Dim	Ophanging, Indoor 2 X 2 m kabelkit Kabel 5x0,75mm² 2,5m	L1241 x W38 x H67
 212472 Inspire Zwart 4140lm 3000K Ra>80 Dim 1x trekschakelaars 34W LED 122 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct/Indirect 50/50%, Cubic Optic Noir	Klasse I IP20	Dim 1x trekschakelaars	Ophanging, Indoor 2 X 2 m kabelkit Kabel 3x0,75mm² 2,5m	L1243 x W38 x H67
 212086 Inspire Zwart 4140lm 3000K Ra>80 Niet dimbaar 34W LED 122 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct/Indirect 50/50%, Cubic Optic Noir	Klasse I IP20	Niet dimbaar	Ophanging, Indoor 2 X 2 m kabelkit Kabel 3x0,75mm² 2,5m	L1241 x W38 x H67
 212081 Inspire Wit 4140lm 3000K Ra>80 DALI-2 / Push Dim 34W LED 122 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct/Indirect 50/50%, Cubic Optic Noir	Klasse I IP20	DALI-2 / Push Dim	Ophanging, Indoor 2 X 2 m kabelkit Kabel 5x0,75mm² 2,5m	L1241 x W38 x H67

Artikel	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
 212474 Inspire Wit 4140lm 3000K Ra>80 Dim 1x trekschakelaars 34W LED 122 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct/Indirect 50/50%, Cubic Optic Noir	Klasse I IP20	Dim 1x trekschakelaars	Ophanging, Indoor 2 X 2 m kabelkit Kabel 3x0,75mm ² 2,5m	L1243 x W38 x H67
 212080 Inspire Wit 4140lm 3000K Ra>80 Niet dimbaar 34W LED 122 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct/Indirect 50/50%, Cubic Optic Noir	Klasse I IP20	Niet dimbaar	Ophanging, Indoor 2 X 2 m kabelkit Kabel 3x0,75mm ² 2,5m	L1241 x W38 x H67
 212089 Inspire Zwart 4300lm 4000K Ra>80 DALI-2 / Push Dim 34W LED 126 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct/Indirect 50/50%, Cubic Optic Noir	Klasse I IP20	DALI-2 / Push Dim	Ophanging, Indoor 2 X 2 m kabelkit Kabel 5x0,75mm ² 2,5m	L1241 x W38 x H67
 212473 Inspire Zwart 4300lm 4000K Ra>80 Dim 1x trekschakelaars 34W LED 126 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct/Indirect 50/50%, Cubic Optic Noir	Klasse I IP20	Dim 1x trekschakelaars	Ophanging, Indoor 2 X 2 m kabelkit Kabel 3x0,75mm ² 2,5m	L1243 x W38 x H67
 212088 Inspire Zwart 4300lm 4000K Ra>80 Fase afsnijding 34W LED 126 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct/Indirect 50/50%, Cubic Optic Noir	Klasse I IP20	Fase afsnijding	Ophanging, Indoor 2 X 2 m kabelkit Kabel 3x0,75mm ² 2,5m	L1241 x W38 x H67

Artikel	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
	212083	Klasse I	DALI-2 / Push Dim	L1241 x W38 x H67
	Inspire Wit 4300lm 4000K Ra>80	IP20	2 X 2 m kabelkit	
	DALI-2 / Push Dim		Kabel 5x0,75mm ² 2,5m	
	34W LED			
	126 lm/W SDCM:3			
	L80/B20>100,000, L90>50,000			
	Direct/Indirect 50/50%, Cubic Optic			
	Noir			
	212475	Klasse I	Dim 1x	L1243 x W38 x H67
	Inspire Wit 4300lm 4000K Ra>80	IP20	trekschakelaars	2 X 2 m kabelkit
	Dim 1x trekschakelaars		Kabel 3x0,75mm ² 2,5m	
	34W LED			
	126 lm/W SDCM:3			
	L80/B20>100,000, L90>50,000			
	Direct/Indirect 50/50%, Cubic Optic			
	Noir			
	212082	Klasse I	Niet dimbaar	L1241 x W38 x H67
	Inspire Wit 4300lm 4000K Ra>80	IP20	2 X 2 m kabelkit	
	Niet dimbaar		Kabel 3x0,75mm ² 2,5m	
	34W LED			
	126 lm/W SDCM:3			
	L80/B20>100,000, L90>50,000			
	Direct/Indirect 50/50%, Cubic Optic			
	Noir			
Accessoires				
	212198			L30 x W20 x H5
	Zwart T-drager plafondbevestiging			
	212470			L78 x W38 x H67
	Inspire Zwart Hoekmodule flexi			
	212255			L596 x W35 x H17
	T-profil Wit Ophangrail 600mm			
	212471			L78 x W38 x H67
	Inspire Wit Hoekmodule flexi			