




Tovdal is a powerful and stylish 'high bay' luminaire. It is very suitable for warehouses and industrial businesses and the multiple lumen packages make it also usable for other kinds of application. Tovdal is easily installed by a ceiling/wall bracket (available as accessory) or a chain (not included). Connection by an IP68 quick connector. The effective optics ensures an optimal symmetric 90-degree light distribution.

Product- en omgevingsbeelden



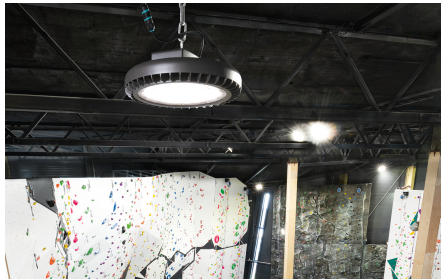

Artikel	Bescherming	Regelapparaatu	Montage/Aansluiting	Afmetingen
	607007 Tovdal Grafiet 26650lm 4000K Ra>80 DALI-2 197W LED 135 lm/W SDCM:3 L80/B10>100,000, L92>50,000 Beam: 86°, Direct, Lens	Klasse I IP65 IK10	r DALI-2 Ophanging, Indoor Kabel 5x1mm² 0,3m + 1,5m, H07RN-F Quick connector	Ø350 x H132
	607002 Tovdal Grafiet 14090lm 4000K Ra>80 Niet dimbaar 92W LED 153 lm/W SDCM:3 L80/B10>100,000, L94>50,000 Beam: 86°, Direct, Lens	Klasse I IP65 IK10	Niet dimbaar Ophanging, Indoor Kabel 3x1mm² 0,3m + 1,5m, H07RN-F Quick connector	Ø350 x H132
	607003 Tovdal Grafiet 26650lm 4000K Ra>80 Niet dimbaar 197W LED 135 lm/W SDCM:3 L80/B10>100,000, L92>50,000 Beam: 86°, Direct, Lens	Klasse I IP65 IK10	Niet dimbaar Ophanging, Indoor Kabel 3x1mm² 0,3m + 1,5m, H07RN-F Quick connector	Ø350 x H132
Accessoires				
	641927 Tovdal Zwart Kabel DALI-2			Ø9 x L10000
	641910 Tovdal Zwart Kabel			Ø9 x L10000 x H9
	607004 Tovdal Grafiet Plafond- en Wandbeugels			L210 x W160 x H50
	607006 Tovdal Grafiet 2X Plafond- en Wandbeugels			L470 x W160 x H130
	607005 Tovdal prismatische Reflector			L410 x W410 x H165
	820259 Startstroombegrenzer DIN 16A			L90 x W18 x H58



Artikel	Bescherming	Regelapparaatuu	Montage/Aansluiting	Afmetingen
 8249044900 Pendelkit 2x5m		r		L19 x W25 x H150