

Rax Soft 150 TW





Rax Soft TW is a high-performance downlight for lighting in public buildings, offices, corridors etc with an excellent light control by a combination of optimized lens and reflector optics. Available with satin matt reflector for high efficiency. Rax Soft TW is installed easily with springs that fit ceiling panels with a thickness of 1–50 mm. Tunable White 2700-6500K LED Dim or DALI Type 8.

Rax Soft 150 TW



Product- en omgevingsbeelden

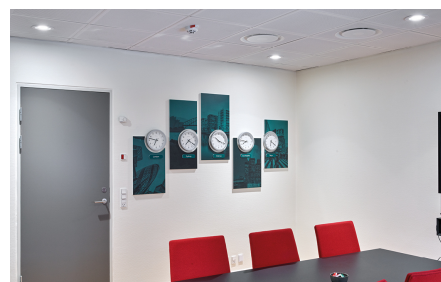

Artikel	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
	Klasse II SELV IP54/IP20 IK08	r TW DALI Type 8	Inbouw, Indoor 5-polige Linect / schroefloos klemmenblok	Ø166 x H83
212575 Rax Soft 150 Satin 2700-6500K Ra>80 TW DALI Type 8 28W LED 93 lm/W SDCM:3 L90/B10>100,000 Beam: 68°, Direct, Satijnmatte reflector				
	Klasse II SELV IP54/IP20 IK08	TW LEDDim	Inbouw, Indoor 3-polige Linect / schroefloos klemmenblok	Ø166 x H83
212574 Rax Soft 150 Satin TW LEDDim 2700-6500K Ra>80 TW LEDDim 28W LED 93 lm/W SDCM:3 L90/B10>100,000 Beam: 68°, Direct, Satijnmatte reflector				
Accessoires				
	212617 Rax 150 Zwart Rehabring Ø155-200mm			Ø220 x H16
	212621 Rax 150 Zwart Helder glas IP44			Ø168 x H12
	212623 Rax 150 Zwart Mat glas IP44			Ø168 x H12
	212620 Rax 150 Wit Helder glas IP44			Ø168 x H12
	212622 Rax 150 Wit Mat glas IP44			Ø168 x H12
	8249044683 Rax 150 Wit Rehabring Ø155-200mm			Ø220 x H16
	8249042216 Rax 150 Montageplaat			L585 x W260 x H15