




Arlon is an efficient and modern luminaire made from die-cast, powder-coated aluminium. The light source is recessed and slightly angled, making it well-suited to lighting walkways, corridors and other similar spaces thanks to its low levels of glare. Can be dimmed using trailing edge dimming or DALI dimmer (DALI upon request). Easy installation with back plate for mounting, two cable inputs and a quick connector. Can also be used to provide uplight.

Arlon



Product- en omgevingsbeelden

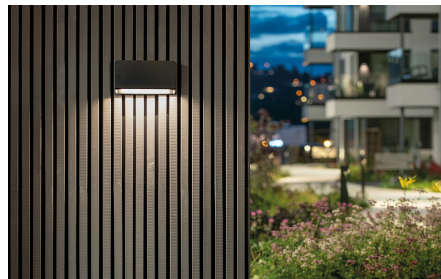

Artikel	Bescherming	Regelapparaatuu r	Montage/Aansluiting	Afmetingen
 653604 Arlon Zwart 920lm 2700K Ra>80 Fase afsnijding 10W LED 92 lm/W SDCM:3 L80/B20>100,000 Direct, Afscherming	Klasse II IP65 IK10	Fase afsnijding	Wand, Outdoor Schroefloos klemmenblok	L270 x W150 x H47
 653606 Arlon Wit 1100lm 2700K Ra>80 Fase afsnijding 10W LED 110 lm/W SDCM:3 L80/B20>100,000 Direct, Afscherming	Klasse II IP65 IK10	Fase afsnijding	Wand, Outdoor Schroefloos klemmenblok	L270 x W150 x H47
 653605 Arlon Zwart 980lm 3000K Ra>80 Fase afsnijding 10W LED 98 lm/W SDCM:3 L80/B20>100,000 Direct, Afscherming	Klasse II IP65 IK10	Fase afsnijding	Wand, Outdoor Schroefloos klemmenblok	L270 x W150 x H47
 653607 Arlon Wit 1170lm 3000K Ra>80 Fase afsnijding 10W LED 117 lm/W SDCM:3 L80/B20>100,000 Direct, Afscherming	Klasse II IP65 IK10	Fase afsnijding	Wand, Outdoor Schroefloos klemmenblok	L270 x W150 x H47
 653622 Arlon Zwart 1030lm 4000K Ra>80 Fase afsnijding 10W LED 103 lm/W SDCM:3 L80/B20>100,000 Direct, Afscherming	Klasse II IP65 IK10	Fase afsnijding	Wand, Outdoor Schroefloos klemmenblok	L270 x W150 x H47
Accessoires				
 653621 Arlon Opaal Afschermkap				L228 x W36 x H15