


Arlon Round




Arlon Round is a slim, stylish wall luminaire with retracted, slightly angled light source. Suitable for spaces such as walkways and corridors. Highly efficient with high lumens per Watt. Can be dimmed using trailing edge dimming or DALI dimmer (DALI upon request). Easy installation with back plate for mounting, two cable inputs and a quick connector. Made from high quality die-cast, powder-coated aluminium. Arlon Round can also be mounted on bollards.

Arlon Round

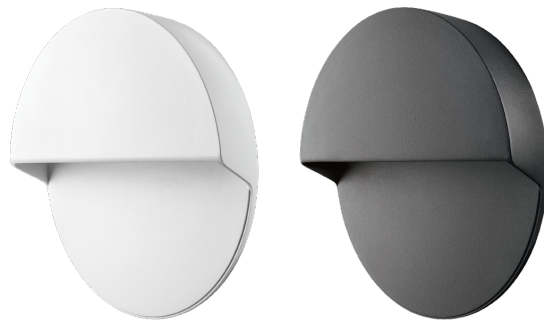

Product- en omgevingsbeelden

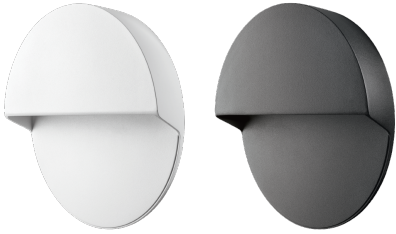

Artikel	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
 653600 Arlon Round Zwart 790lm 2700K Ra>80 Fase afsnijding 10W LED 79 lm/W SDCM:3 L80/B20>100,000 Direct, Afscherming	Klasse II IP65 IK10	Fase afsnijding	Wand, Outdoor Schroefloos klemmenblok	L269 x W266 x H47
 653617 Arlon Round Corten 810lm 2700K Ra>80 Fase afsnijding 10W LED 81 lm/W SDCM:3 L80/B20>100,000 Direct, Afscherming	Klasse II IP65 IK10	Fase afsnijding	Wand, Outdoor Schroefloos klemmenblok	L269 x W266 x H47
 653602 Arlon Round Wit 1050lm 2700K Ra>80 Fase afsnijding 10W LED 105 lm/W SDCM:3 L80/B20>100,000 Direct, Afscherming	Klasse II IP65 IK10	Fase afsnijding	Wand, Outdoor Schroefloos klemmenblok	L269 x W266 x H47
 653601 Arlon Round Zwart 840lm 3000K Ra>80 Fase afsnijding 10W LED 84 lm/W SDCM:3 L80/B20>100,000 Direct, Afscherming	Klasse II IP65 IK10	Fase afsnijding	Wand, Outdoor Schroefloos klemmenblok	L269 x W266 x H47
 653618 Arlon Round Corten 860lm 3000K Ra>80 Fase afsnijding 10W LED 86 lm/W SDCM:3 L80/B20>100,000 Direct, Afscherming	Klasse II IP65 IK10	Fase afsnijding	Wand, Outdoor Schroefloos klemmenblok	L269 x W266 x H47
 653603 Arlon Round Wit 1120lm 3000K Ra>80 Fase afsnijding 10W LED 112 lm/W SDCM:3 L80/B20>100,000 Direct, Afscherming	Klasse II IP65 IK10	Fase afsnijding	Wand, Outdoor Schroefloos klemmenblok	L269 x W266 x H47

Artikel	Bescherming		Regelapparaatu r	Montage/Aansluiting	Afmetingen
	653623	Klasse II	Fase afsnijding	Wand, Outdoor	L269 x W266 x H47
	Arlon Round Zwart 890lm 4000K	IP65		Schroefloos klemmenblok	
	Ra>80 Fase afsnijding	IK10			
	10W LED				
	89 lm/W SDCM:3				
	L80/B20>100,000				
	Direct, Afscherming				
Accessoires					
	614580				L1000 x W290 x H220
	Paal Solo, Tanto, Uno, Primo en Arlond Round Zwart				
	653616				L248 x W175 x H15
	Arlon Round Zwart Sokkelbeugel				
	600580				W330 x H524 x D260
	Paal Solo, Tanto, Uno, Primo en Arlond Round Bevestigingsset				
	653621				L228 x W36 x H15
	Arlon Opaal Afschermkap				