


Inspire Connect



Inspire Connect is a slim and minimalist luminaire featuring an integrated SG Connect sensor for smart and energy-efficient lighting control. The sensor switches the light on when motion is detected and off after a defined time period, delivering significant energy savings. A built-in daylight sensor can be activated to maintain the desired light level at all times. Configuration is simple via the SG Connect Commissioning App, and the luminaire can be used as a standalone unit or as part of a larger system that can easily be expanded or reconfigured as needed. Inspire Connect combines direct, glare-free light using PMMA optics with indirect wide-beam illumination for effective task lighting over desks and in office environments. It is supplied with a 2.5-meter cable and adjustable wire suspension with fittings for ceiling and T-profile, and comes in powder-coated aluminum in matte black or white.

Product- en omgevingsbeelden



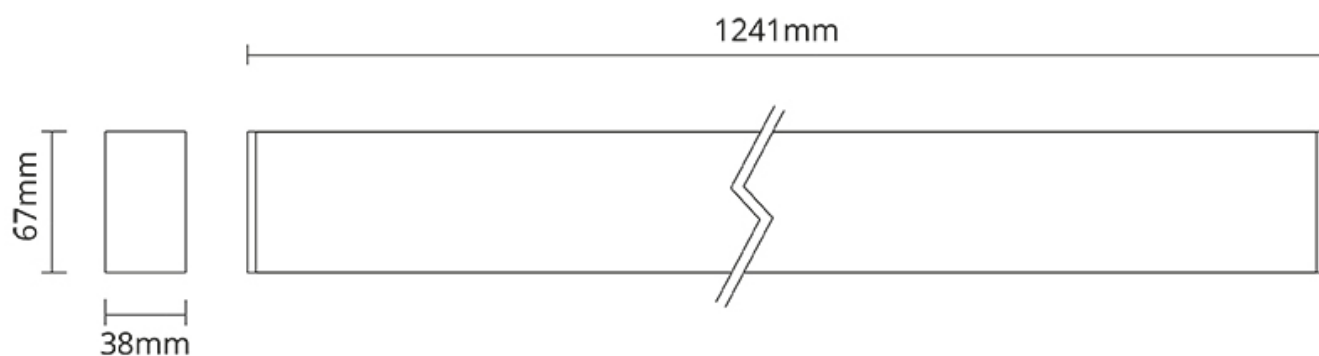

De afmetingen van de lijntekening vindt u bij de afzonderlijke artikelcodes op de volgende pagina

Artikel	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
	Klasse I	Connect	Ophanging, Indoor 2 X 2 m kabelkit Kabel 3x0,75mm ² 2,5m	L1241 x W38 x H70
	IP20			
212477 Inspire Connect 1200 Zwart prismatische 3510lm 3000K Ra>80 Connect 29W LED 121 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct/Indirect 50/50%, Prismaoptiek				
	Klasse I	Connect	Ophanging, Indoor 2 X 2 m kabelkit Kabel 3x0,75mm ² 2,5m	L1241 x W38 x H70
	IP20			
212476 Inspire Connect 1200 Wit prismatische 4000lm 3000K Ra>80 Connect 29W LED 138 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct/Indirect 50/50%, Prismaoptiek				
	Klasse I	Connect	Ophanging, Indoor 2 X 2 m kabelkit Kabel 3x0,75mm ² 2,5m	L1241 x W38 x H70
	IP20			
212931 Inspire Connect 1200 Wit prismatische 3580lm 3000K Ra>90 Connect 29W LED 123 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct/Indirect 50/50%, Prismaoptiek				
	Klasse I	Connect	Ophanging, Indoor 2 X 2 m kabelkit Kabel 3x0,75mm ² 2,5m	L1241 x W38 x H70
	IP20			
212479 Inspire Connect 1200 Zwart prismatische 3620lm 4000K Ra>80 Connect 29W LED 125 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct/Indirect 50/50%, Prismaoptiek				
	Klasse I	Connect	Ophanging, Indoor 2 X 2 m kabelkit Kabel 3x0,75mm ² 2,5m	L1241 x W38 x H70
	IP20			
212478 Inspire Connect 1200 Wit prismatische 4130lm 4000K Ra>80 Connect 29W LED 142 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct/Indirect 50/50%, Prismaoptiek				

Artikel	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
 212932 Inspire Connect 1200 Wit prismatische 3860lm 4000K Ra>90 Connect 29W LED 133 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct/Indirect 50/50%, Prismaoptiek	Klasse I IP20	Connect	Ophanging, Indoor 2 X 2 m kabelkit Kabel 3x0,75mm² 2,5m	L1241 x W38 x H70