

Disc Connect




Disc Connect is an energy-efficient, surface-mounted LED luminaire with a slim profile for a clean, modern look. It comes with an integrated SG Connect sensor for smart and energy-saving lighting control. The sensor switches the light on when motion is detected and off after a defined time period, delivering significant energy savings. A built-in daylight sensor can be activated to maintain the desired light level at all times. Configuration is simple via the SG Connect Commissioning App, and the luminaire can be used as a standalone unit or as part of a larger system that can easily be expanded or reconfigured as needed. An opal prismatic diffuser ensures glare-free light, and the fixture is crafted from powder-coated aluminum in matte black or white. Installation is quick with a snap-on connection between luminaire and backplate, and the design is adapted for both concealed and exposed cable routing.

Disc Connect



Product- en omgevingsbeelden



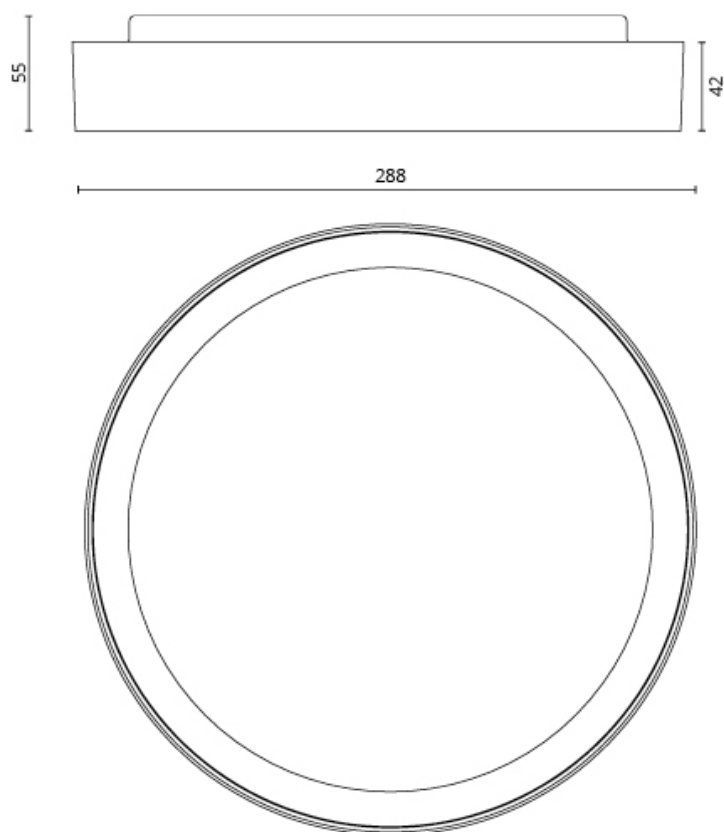

De afmetingen van de lijntekening vindt u bij de afzonderlijke artikelcodes op de volgende pagina

Artikel	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
 606235 Disc 760 Zwart 5690/6030lm 3000/4000K Ra>80 Connect 48W LED 119/126lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprisma	Klasse II IP20	Connect	Opbouw Schroefloos klemmenblok	Ø760 x H55
 606234 Disc 760 Wit 5990/6340lm 3000/4000K Ra>80 Connect 48W LED 125/132lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprisma	Klasse II IP20	Connect	Opbouw Schroefloos klemmenblok	Ø760 x H55
 606241 Disc 760 Wit 5100lm/5370lm 3000/4000K Ra>90 Connect 48W LED 106/112lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprisma	Klasse II IP20	Connect	Opbouw Schroefloos klemmenblok	Ø760 x H55
 606232 Disc 480 Zwart 3390lm 3000K Ra>80 Connect 29W LED 117 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprisma	Klasse II IP20	Connect	Opbouw, Indoor Schroefloos klemmenblok	Ø470 x H55
 606236 Disc 290 Zwart 1900lm 3000K Ra>80 Connect 17W LED 112 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprisma	Klasse II IP20	Connect	Opbouw, Indoor Schroefloos klemmenblok	Ø288 x H55
 606170 Disc 480 Wit 3680lm 3000K Ra>80 Connect 29W LED 127 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprisma	Klasse II IP20	Connect	Opbouw, Indoor Schroefloos klemmenblok	Ø470 x H55

Artikel	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
 606172 Disc 290 Wit 1990lm 3000K Ra>80 Connect 17W LED 117 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprisma	Klasse II IP20	Connect	Opbouw, Indoor Schroefloos klemmenblok	Ø288 x H55
 606237 Disc 290 Wit 1710lm 3000K Ra>90 Connect 18W LED 95 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprisma	Klasse II IP20	Connect	Opbouw, Indoor 3-polig schroefloos klemmenblok	Ø288 x H55
 606239 Disc 480 Wit 3100lm 3000K Ra>90 Connect 29W LED 107 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprisma	Klasse II IP20	Connect	Opbouw, Indoor 3-polig schroefloos klemmenblok	Ø470 x H55
 606171 Disc 480 Wit 3790lm 4000K Ra>80 Connect 29W LED 131 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprisma	Klasse II IP20	Connect	Opbouw, Indoor Schroefloos klemmenblok	Ø470 x H55
 606173 Disc 290 Wit 2110lm 4000K Ra>80 Connect 17W LED 124 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprisma	Klasse II IP20	Connect	Opbouw, Indoor Schroefloos klemmenblok	Ø288 x H55
 606238 Disc 290 Wit 1870lm 4000K Ra>90 Connect 18W LED 104 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprisma	Klasse II IP20	Connect	Opbouw, Indoor 3-polig schroefloos klemmenblok	Ø288 x H55

Artikel	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
 606240 Disc 480 Wit 3420lm 4000K Ra>90 Connect 29W LED 118 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprisma Klasse II IP20 Connect Opbouw, Indoor 3-polig schroefloos klemmenblok Ø470 x H55				
Accessoires				
 606095 Disc/Frosta Zwart Pendel Adapter L5000 x W102 x H22				
 606094 Disc/Frosta Wit Pendel Adapter L5000 x W102 x H22				