

Arena Eco Connect




Arena Eco Connect is an energy-efficient and practical LED luminaire for warehouses and industrial environments, featuring an integrated SG Connect sensor for smart and energy-saving lighting control. The sensor switches the light on when motion is detected and off after a defined time period, ensuring significant energy savings. It also includes a built-in daylight sensor that can be activated to maintain the desired light level at all times. Arena Eco Connect is available with two sensor variants: Low-Bay for mounting heights up to 5 meters and Mid-Bay for heights up to 12 meters, ensuring optimal detection regardless of installation height. Configuration is simple via the SG Connect Commissioning App, and the luminaire can be used as a standalone unit or as part of a larger system that can easily be expanded or reconfigured as needed. Arena Eco Connect combines high performance with easy installation. It features a hinged component box for quick mounting and can be installed directly on the ceiling with screws or using mounting hooks for horizontal wires. Pre-installed through-wiring and cable entry at both ends make installation even more efficient.

Arena Eco Connect




Product- en omgevingsbeelden



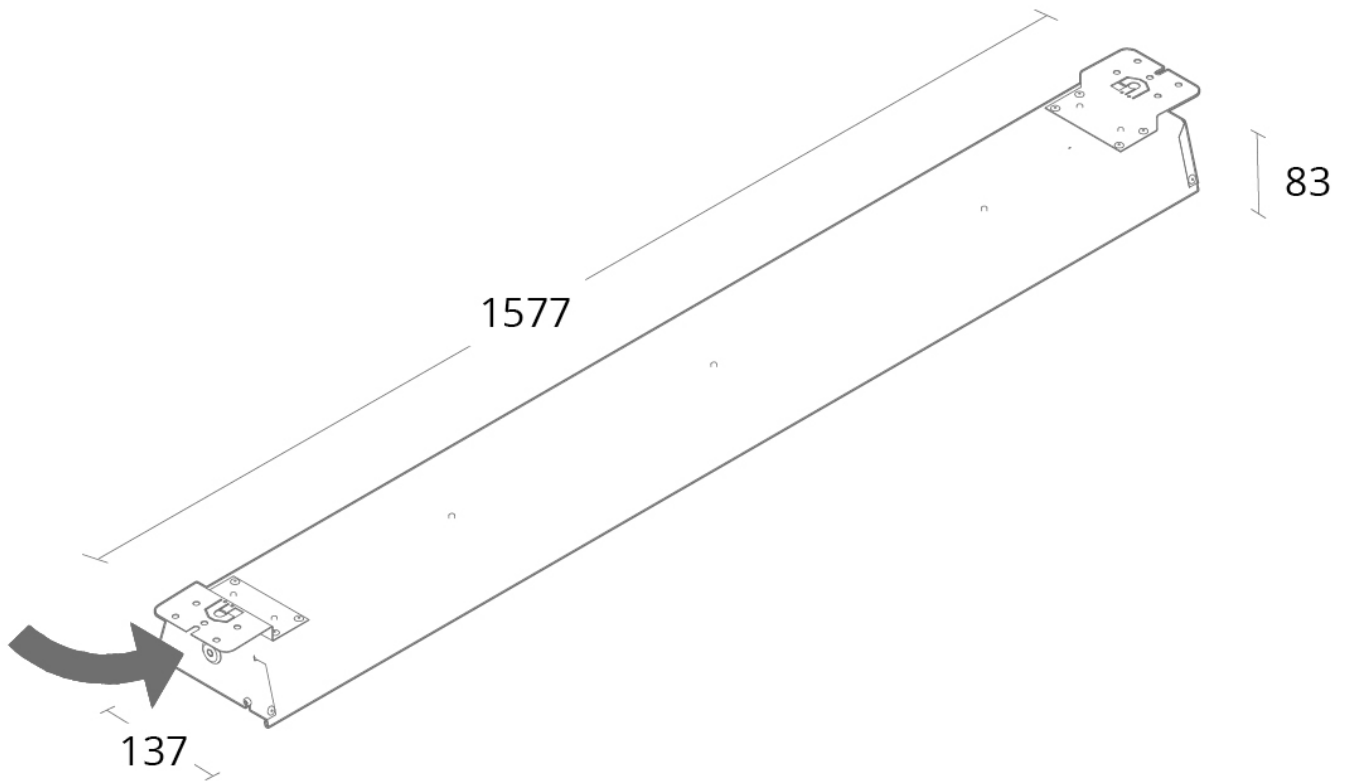

De afmetingen van de lijntekening vindt u bij de afzonderlijke artikelcodes op de volgende pagina

Artikel	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
<div data-bbox="86 398 217 456"></div> <div data-bbox="233 398 542 678"> <p>607026</p> <p>Arena Eco Connect Low-Bay 1500</p> <p>Grijs Wide 10960lm 4000K Ra>80</p> <p>Connect</p> <p>76W LED</p> <p>144 lm/W SDCM:3</p> <p>L80/B20>100,000, L90>50,000</p> <p>Beam: 90°, Direct, Lens</p> </div>	<p>Klasse I</p> <p>IP20</p>	<p>r</p> <p>Connect</p>	<p>Opbouw, Indoor</p> <p>5-polig schroefloos klemmenblok</p> <p>met 5x2,5mm² doorvoerbedrading</p>	<p>L1552 x W134 x H72</p>