




Ecoline Connect is a slim and elegant ceiling luminaire for offices, schools, and public buildings, featuring an integrated SG Connect sensor for smart and energy-efficient lighting control. The sensor switches the light on when motion is detected and off after a defined time period, delivering significant energy savings. A built-in daylight sensor can be activated to maintain the desired light level at all times. Configuration is simple via the SG Connect Commissioning App, and the luminaire can be used as a standalone unit or as part of a larger system that can easily be expanded or reconfigured as needed. Ecoline Connect features a 3-layer optical system with low glare ( $UGR < 19$ ) and a robust housing in powder-coated steel. It can be mounted directly on the ceiling or suspended using the adjustable wire kit (sold separately).

## Product- en omgevingsbeelden



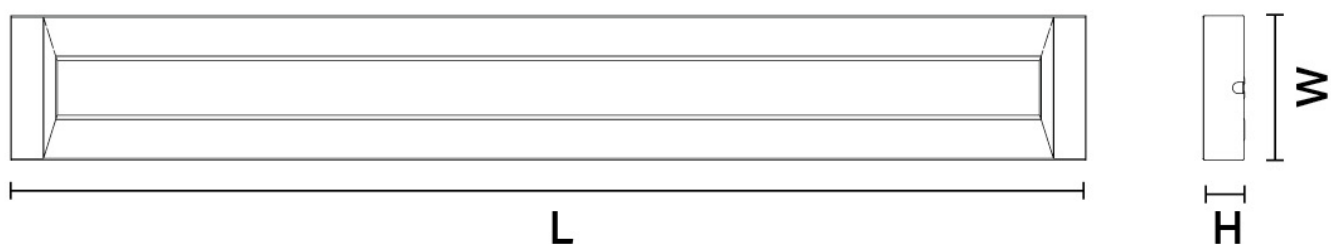

De afmetingen van de lijntekening vindt u bij de afzonderlijke artikelcodes op de volgende pagina

| Artikel                                                                                                                                                                     | Bescherming                    | Regelapparaat | Montage/Aansluiting                                            | Afmetingen         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|---------------|----------------------------------------------------------------|--------------------|
|                                                                                             | <b>Klasse I</b><br><b>IP20</b> | Connect       | Ophanging of opbouw, Indoor<br>3-polig schroefloos klemmenblok | L1235 x W166 x H55 |
| 212096<br><b>Ecoline Connect 1200 Wit 3910lm</b><br><b>3000K Ra&gt;80 Connect</b><br><b>30W LED</b><br>130 lm/W SDCM:3<br>L80/B20>100,000, L90>50,000<br>Direct, Opalprisma |                                |               |                                                                |                    |
|                                                                                             | <b>Klasse I</b><br><b>IP20</b> | Connect       | Ophanging of opbouw, Indoor<br>3-polig schroefloos klemmenblok | L1600 x W166 x H55 |
| 212098<br><b>Ecoline Connect 1600 Wit 4880lm</b><br><b>3000K Ra&gt;80 Connect</b><br><b>36W LED</b><br>136 lm/W SDCM:3<br>L80/B20>100,000, L90>50,000<br>Direct, Opalprisma |                                |               |                                                                |                    |
|                                                                                             | <b>Klasse I</b><br><b>IP20</b> | Connect       | Ophanging of opbouw, Indoor<br>3-polig schroefloos klemmenblok | L1235 x W166 x H55 |
| 212816<br><b>Ecoline Connect 1200 Wit 4020lm</b><br><b>3000K Ra&gt;90 Connect</b><br><b>33W LED</b><br>122 lm/W SDCM:3<br>L80/B20>100,000, L90>50,000<br>Direct, Opalprisma |                                |               |                                                                |                    |
|                                                                                           | <b>Klasse I</b><br><b>IP20</b> | Connect       | Ophanging of opbouw, Indoor<br>3-polig schroefloos klemmenblok | L1600 x W166 x H55 |
| 212818<br><b>Ecoline Connect 1600 Wit 4760lm</b><br><b>3000K Ra&gt;90 Connect</b><br><b>38W LED</b><br>125 lm/W SDCM:3<br>L80/B20>100,000, L90>50,000<br>Direct, Opalprisma |                                |               |                                                                |                    |
|                                                                                           | <b>Klasse I</b><br><b>IP20</b> | Connect       | Ophanging of opbouw, Indoor<br>3-polig schroefloos klemmenblok | L1235 x W166 x H55 |
| 212097<br><b>Ecoline Connect 1200 Wit 4150lm</b><br><b>4000K Ra&gt;80 Connect</b><br><b>30W LED</b><br>138 lm/W SDCM:3<br>L80/B20>100,000, L90>50,000<br>Direct, Opalprisma |                                |               |                                                                |                    |
|                                                                                           | <b>Klasse I</b><br><b>IP20</b> | Connect       | Ophanging of opbouw, Indoor<br>3-polig schroefloos klemmenblok | L1600 x W166 x H55 |
| 212099<br><b>Ecoline Connect 1600 Wit 5180lm</b><br><b>4000K Ra&gt;80 Connect</b><br><b>36W LED</b><br>144 lm/W SDCM:3<br>L80/B20>100,000, L90>50,000<br>Direct, Opalprisma |                                |               |                                                                |                    |

| Artikel                                                                             |                                                                                                                                                                             | Bescherming                    | Regelapparaatu<br>r | Montage/Aansluiting                                            | Afmetingen         |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|---------------------|----------------------------------------------------------------|--------------------|
|     | 212817<br><b>Ecoline Connect 1200 Wit 4220lm</b><br><b>4000K Ra&gt;90 Connect</b><br><b>33W LED</b><br>128 lm/W SDCM:3<br>L80/B20>100,000, L90>50,000<br>Direct, Opalprisma | <b>Klasse I</b><br><b>IP20</b> | Connect             | Ophanging of opbouw, Indoor<br>3-polig schroefloos klemmenblok | L1235 x W166 x H55 |
|     | 212819<br><b>Ecoline Connect 1600 Wit 4950lm</b><br><b>4000K Ra&gt;90 Connect</b><br><b>38W LED</b><br>130 lm/W SDCM:3<br>L80/B20>100,000, L90>50,000<br>Direct, Opalprisma | <b>Klasse I</b><br><b>IP20</b> | Connect             | Ophanging of opbouw, Indoor<br>3-polig schroefloos klemmenblok | L1600 x W166 x H55 |
| Accessoires                                                                         |                                                                                                                                                                             |                                |                     |                                                                |                    |
|    | 212255<br><b>T-profil Wit Ophangrail 600mm</b>                                                                                                                              |                                |                     |                                                                | L596 x W35 x H17   |
|  | 212095<br><b>EcoLine Pendelkit</b>                                                                                                                                          |                                |                     |                                                                | L2000              |