

Sense Basic Connect




Sense Basic Connect is a cost-effective LED panel that's ideal for both new installations and refurbishment projects. It features an integrated SG Connect sensor for smart, energy-efficient lighting control. The sensor switches the light on when motion is detected and off after a defined time period, delivering significant energy savings. A built-in daylight sensor can be activated to maintain the desired light level at all times. Configuration is simple via the SG Connect Commissioning App, and the panel can be used as a standalone unit or as part of a larger system that can easily be expanded or reconfigured as needed. Sense Basic Connect comes in a lightweight steel housing with a slim 36 mm profile and a back-lit design for even, comfortable illumination. Supplied in single packs for easy handling.

Sense Basic Connect



Product- en omgevingsbeelden



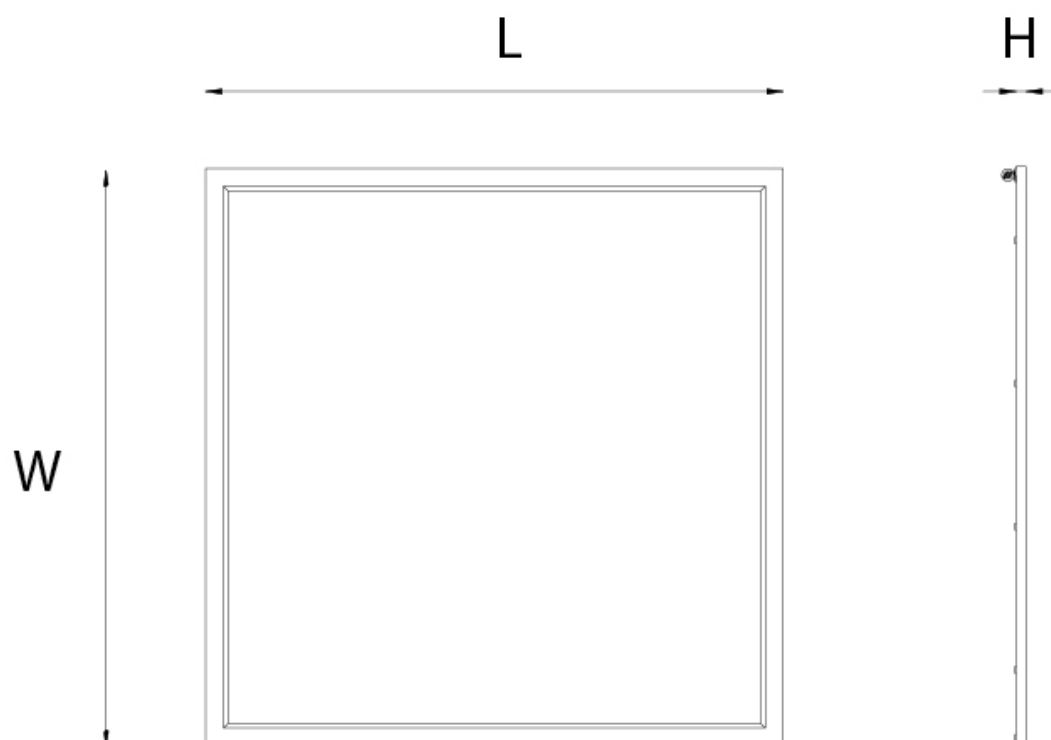

De afmetingen van de lijntekening vindt u bij de afzonderlijke artikelcodes op de volgende pagina

Artikel	Bescherming	Regelapparaatuu	Montage/Aansluiting	Afmetingen
 212706 Sense Basic 600x600 Wit Incl driver 4320lm 3000K Ra>80 Connect 33W LED 131 lm/W SDCM:3 L80/B20>100,000 Direct, Opalprisma	Klasse II SELV IP20	Connect	Inbouw, Indoor 3-polige Linect / schroefloos klemmenblok	L595 x W595 x H36
 212707 Sense Basic 600x600 Wit Incl driver 4390lm 4000K Ra>80 Connect 33W LED 133 lm/W SDCM:3 L80/B20>100,000 Direct, Opalprisma	Klasse II SELV IP20	Connect	Inbouw, Indoor 3-polige Linect / schroefloos klemmenblok	L595 x W595 x H36