

Sense Basic Connect




Sense Basic Connect is a cost-effective LED panel that's ideal for both new installations and refurbishment projects. It features an integrated SG Connect sensor for smart, energy-efficient lighting control. The sensor switches the light on when motion is detected and off after a defined time period, delivering significant energy savings. A built-in daylight sensor can be activated to maintain the desired light level at all times. Configuration is simple via the SG Connect Commissioning App, and the panel can be used as a standalone unit or as part of a larger system that can easily be expanded or reconfigured as needed. Sense Basic Connect comes in a lightweight steel housing with a slim 36 mm profile and a back-lit design for even, comfortable illumination. Supplied in single packs for easy handling.

Sense Basic Connect



Produkt- und Umgebungsbilder



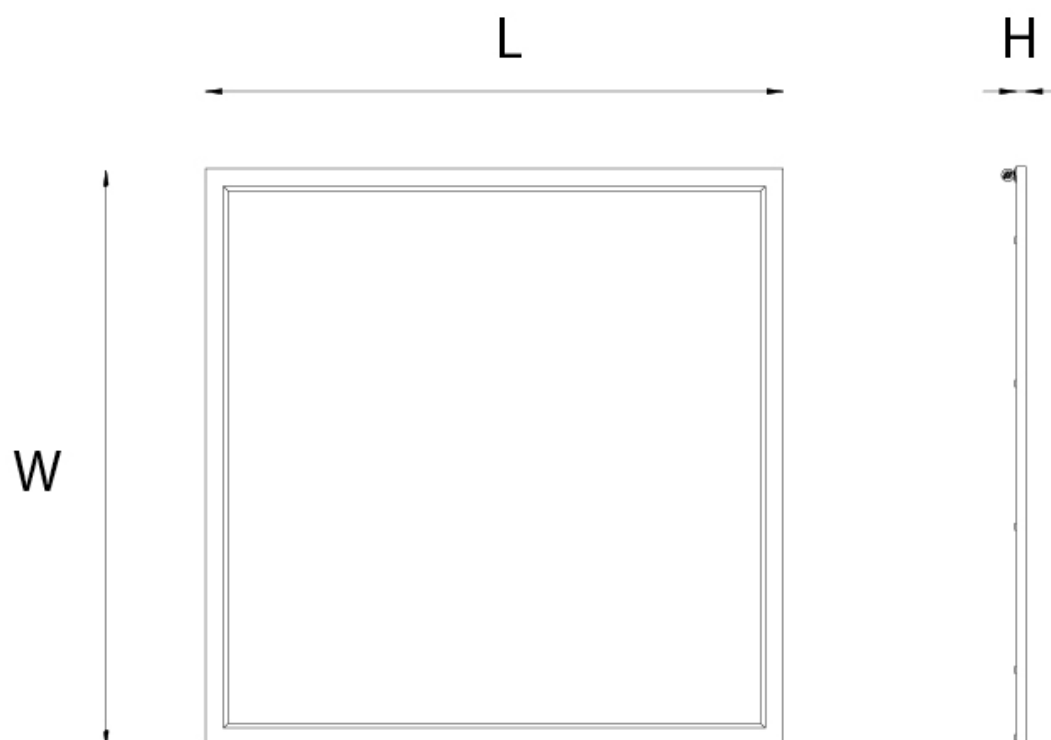

Die Abmessungen der Strichzeichnungen finden Sie unter den einzelnen Artikelcodes auf der nächsten Seite

Artikel	Schutzklasse	Controller	Montage/Anschluss	Grösse
 212706 Sense Basic 600x600 Weiss Inkl Treiber 4320lm 3000K Ra>80 Connect 33W LED 131 lm/W SDCM:3 L80/B20>100.000 Direkt, Opalprism	Klasse II SELV IP20	Connect	Einbau, Indoor 3 pol Linect / Anschlussklemme	L595 x W595 x H36
 212707 Sense Basic 600x600 Weiss Inkl Treiber 4390lm 4000K Ra>80 Connect 33W LED 133 lm/W SDCM:3 L80/B20>100.000 Direkt, Opalprism	Klasse II SELV IP20	Connect	Einbau, Indoor 3 pol Linect / Anschlussklemme	L595 x W595 x H36
Zubehör				
 212935 Sense/DiLED 625x625 Weiss Universal adapter steelplate				L620 x W620 x H11