

Lineal Recessed



Lineal Recessed is a modular system solution for recessed mounting, with a perfect, well thought-out design for continuous light in illuminated lines. Lineal Recessed appears elegant in both ceilings and walls. It is easy to install in different ceiling plate thicknesses with a 90 degree turn bracket. The efficient lighting solution optimises visual comfort and light quality, and makes Lineal Trim ideal for many applications such as offices, corridors and foyers or as decorative lighting. For each continuous line, you need one or more straight lines and/or corners, a start kit and a front cover. Lineal Recessed can be combined with Lineal Cubic Recessed, enabling creative lighting designs.


Lineal Recessed



Galerie de produits et d'environnements




Lineal Recessed

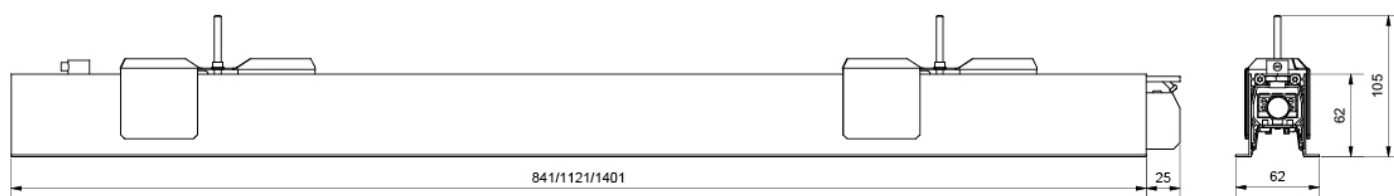

Pour les dimensions des dessins, veuillez consulter les codes de chaque article à la page suivante

Article	Protection	Convertisseurs	Montage/Connexion	Dimensions
 8246095648 Lineal recessed 840 Blanc 1380lm 3000K Ra>80 DALI-2 / Push Dim 13W LED 106 lm/W SDCM:3 L80/B10>100,000, L93/>50,000 Directe,	Classe I IP20 IK08	DALI-2 / Push Dim	Encastré, Indoor	L841 x W62 x H62
 8246095664 Lineal recessed 1120 Blanc 1870lm 3000K Ra>80 DALI-2 / Push Dim 17W LED 110 lm/W SDCM:3 L80/B10>100,000, L93/>50,000 Directe,	Classe I IP20 IK08	DALI-2 / Push Dim	Encastré, Indoor	L1121 x W62 x H62
 8246095677 Lineal recessed 1400 Blanc 2320lm 3000K Ra>80 DALI-2 / Push Dim 21W LED 110 lm/W SDCM:3 L80/B10>100,000, L93/>50,000 Directe,	Classe I IP20 IK08	DALI-2 / Push Dim	Encastré, Indoor	L1401 x W62 x H62
 8246095703 Lineal recessed Module d'angle Blanc 1870lm 3000K Ra>80 DALI-2 / Push Dim 17W LED 110 lm/W SDCM:3 L80/B10>100,000, L93/>50,000 Directe,	Classe I IP20 IK08	DALI-2 / Push Dim	Encastré, Indoor	L627 x W581 x H70
 8246095059 Lineal recessed 1120 Blanc 1970lm 4000K Ra>80 DALI-2 / Push Dim 17W LED 116 lm/W SDCM:3 L80/B10>100,000, L93/>50,000 Directe,	Classe I IP20 IK08	DALI-2 / Push Dim	Encastré, Indoor	L1121 x W62 x H62
 8246095651 Lineal recessed 840 Blanc 1450lm 4000K Ra>80 DALI-2 / Push Dim 13W LED 112 lm/W SDCM:3 L80/B10>100,000, L93/>50,000 Directe,	Classe I IP20 IK08	DALI-2 / Push Dim	Encastré, Indoor	L841 x W62 x H62

Article	Protection	Convertisseurs	Montage/Connexion	Dimensions
 8246095680 Lineal recessed 1400 Blanc 2440lm 4000K Ra>80 DALI-2 / Push Dim 21W LED 116 lm/W SDCM:3 L80/B10>100,000, L93/>50,000 Directe,	Classe I IP20 IK08	DALI-2 / Push Dim	Encastré, Indoor	L1401 x W62 x H62
 8246095716 Lineal recessed Module d'angle Blanc 1970lm 4000K Ra>80 DALI-2 / Push Dim 17W LED 116 lm/W SDCM:3 L80/B10>100,000, L93/>50,000 Directe,	Classe I IP20 IK08	DALI-2 / Push Dim	Encastré, Indoor	L627 x W581 x H70
 8246096207 Lineal recessed 1120 Blanc Profil aveugle DALI-2 / Push Dim		DALI-2 / Push Dim	Encastré, Indoor	L1121 x W62 x H62

Accessoires

 8249045080 Lineal 2240 Noir Profil aveugle Façade				L2240 x W38 x H4
 8246095693 Lineal recessed Kit de démarrage Blanc DALI-2 / Push Dim				L285 x W240 x H36
 8249045077 Lineal 2240 Blanc Profil aveugle Façade				L2240 x W38 x H4
 8249044968 Lineal 2800 Opalprism Diffuseur				L2800 x W38 x H4
 8249044971 Lineal 5600 Opalprism Diffuseur				L5600 x W38 x H4
 8249044984 Lineal 8400 Opalprism Diffuseur				L8400 x W38 x H4