




Design: Christian Hvidt. Mast or wall-mounted (600 mm diameter) IP66 LED luminaire. Base and top made of die-cast aluminium, inner diffuser made of PMMA opal and outer optics made of polycarbonate (PC). Grey or black base and top. Complete with LED driver for operation of LED light sources mounted to component rail with internal connector/lampholder and pre-mounted with five-metre connection cable. Prepared for mounting on 60 mm or designer mast. Safety class II.

Galerie de produits et d'environnements

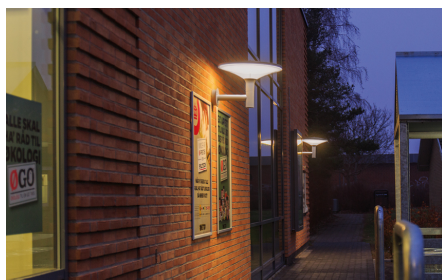

Article		Protection	Convertisseurs	Montage/Connexion	Dimensions
	8246090630	Classe II	Non dimmable	haut de poteau - (Ø60mm), Outdoor	Ø600 x H291
	Place Noir 2410lm 3000K Ra>80 Non dimmable 21W LED 115 lm/W SDCM:3 L90/B10>50,000, L80/B10>100,000 Directe,	IP66 IK10		Cable 2x1mm ² 6m	
	8246088215	Classe II	DYNADIM	haut de poteau - (Ø60mm), Outdoor	Ø600 x H291
	Place Gris 2410lm 3000K Ra>80 DYNADIM 21W LED 115 lm/W SDCM:3 L90/B10>50,000, L80/B10>100,000 Directe,	IP66 IK10		Cable 2x1mm ² 6m	
	8246087999	Classe II	Non dimmable	haut de poteau - (Ø60mm), Outdoor	Ø600 x H291
	Place Gris 2410lm 3000K Ra>80 Non dimmable 21W LED 115 lm/W SDCM:3 L90/B10>50,000, L80/B10>100,000 Directe,	IP66 IK10		Cable 2x1mm ² 6m	
	8246090614	Classe II	DYNADIM	haut de poteau - (Ø60mm), Outdoor	Ø600 x H291
	Place Noir 2510lm 4000K Ra>80 DYNADIM 28W LED 90 lm/W SDCM:3 L90/B10>50,000, L70/B10>100,000 Directe,	IP66 IK10		Cable 2x1mm ² 6m	
	8246090643	Classe II	Non dimmable	haut de poteau - (Ø60mm), Outdoor	Ø600 x H291
	Place Noir 2530lm 4000K Ra>80 Non dimmable 21W LED 120 lm/W SDCM:3 L90/B10>50,000, L80/B10>100,000 Directe,	IP66 IK10		Cable 2x1mm ² 6m	
	8246088228	Classe II	DYNADIM	haut de poteau - (Ø60mm), Outdoor	Ø600 x H291
	Place Gris 2530lm 4000K Ra>80 DYNADIM 21W LED 120 lm/W SDCM:3 L90/B10>50,000, L70/B10>100,000 Directe,	IP66 IK10		Cable 2x1mm ² 6m	

Article	Protection	Convertisseurs	Montage/Connexion	Dimensions
 8246087407 Place Gris 2530lm 4000K Ra>80 Non dimmable 21W LED 120 lm/W SDCM:3 L90/B10>50,000, L80/B10>100,000 Directe,	Classe II IP66 IK10	Non dimmable	haut de poteau - (Ø60mm), Outdoor Cable 2x1mm² 6m	Ø600 x H291
Accessoires				
 8249044492 Place Support mural Noir Support mural				L350 x W175 x H150
 8249043943 • Galvanisé Pièce de réduction de Ø76 à Ø60				L230 x W98 x H230
 8249044489 Place Support mural Gris Support mural				L350 x W175 x H150

• = Cet article est produit sur commande, avec un délai de livraison prévu de 3-4 semaines.