




The optimal downlight in the market for indoor and outdoor use. Junistar Lux IsoSafe emits a harmonious, non-flickering light with excellent colour rendering. Its patented, adjustable 30-degree tilt function in all directions is covered by a 10-year warranty. It includes a junction box that provides strain relief for several types of cables, as well as fixation for plastic tubing. Our IsoSafe products can be mounted directly in insulation.

Galerie de produits et d'environnements



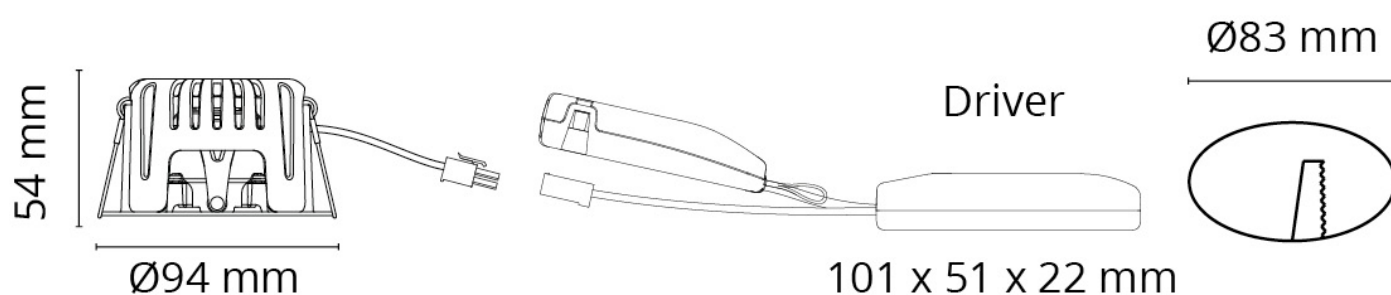


Pour les dimensions des dessins, veuillez consulter les codes de chaque article à la page suivante

Article	Protection	Convertisseurs	Montage/Connexion	Dimensions
 902524 Junistar Lux IsoSafe Noir 580lm 2700K Ra 98 Coupure de phase 8W LED 73 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Directe, Reflector	Classe II SELV IP44/IP20	Coupure de phase	Encastré, Indoor / Outdoor Bornier sans vis	Ø94 x H56
 902245 Junistar Lux IsoSafe Noir/Or 530lm 2700K Ra 98 Coupure de phase 7W LED 76 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Directe, Reflector	Classe II SELV IP44/IP20	Coupure de phase	Encastré, Indoor Bornier sans vis	Ø94 x H56
 902521 Junistar Lux IsoSafe Acier brossé 580lm 2700K Ra 98 Coupure de phase 8W LED 73 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Directe, Reflector	Classe II SELV IP44/IP20	Coupure de phase	Encastré, Indoor Bornier sans vis	Ø94 x H56
 902621 Junistar Lux IsoSafe Graphite 580lm 2700K Ra 98 DALI-2 7W LED 83 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Directe, Reflector	Classe II SELV IP44/IP20	DALI-2	Encastré, Indoor / Outdoor Linect 5 pôles / bornier sans vis	Ø94 x H56
 902527 Junistar Lux IsoSafe Graphite 580lm 2700K Ra 98 Coupure de phase 8W LED 73 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Directe, Reflector	Classe II SELV IP44/IP20	Coupure de phase	Encastré, Indoor / Outdoor Bornier sans vis	Ø94 x H56
 902518 Junistar Lux IsoSafe Blanc 580lm 2700K Ra 98 Coupure de phase 8W LED 73 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Directe, Reflector	Classe II SELV IP44/IP20	Coupure de phase	Encastré, Indoor / Outdoor Bornier sans vis	Ø94 x H56

Article		Protection	Convertisseurs	Montage/Connexion	Dimensions
	902525 Junistar Lux IsoSafe Noir 590lm 3000K Ra 98 Coupure de phase 8W LED 74 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Directe, Reflector	Classe II SELV IP44/IP20	Coupure de phase	Encastré, Indoor / Outdoor Bornier sans vis	Ø94 x H56
	902522 Junistar Lux IsoSafe Acier brossé 590lm 3000K Ra 98 Coupure de phase 8W LED 74 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Directe, Reflector	Classe II SELV IP44/IP20	Coupure de phase	Encastré, Indoor Bornier sans vis	Ø94 x H56
	902528 Junistar Lux IsoSafe Graphite 590lm 3000K Ra 98 Coupure de phase 8W LED 74 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Directe, Reflector	Classe II SELV IP44/IP20	Coupure de phase	Encastré, Indoor / Outdoor Bornier sans vis	Ø94 x H56
	902519 Junistar Lux IsoSafe Blanc 590lm 3000K Ra 98 Coupure de phase 8W LED 74 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Directe, Reflector	Classe II SELV IP44/IP20	Coupure de phase	Encastré, Indoor / Outdoor Bornier sans vis	Ø94 x H56
	902526 Junistar Lux IsoSafe Noir 620lm 4000K Ra 98 Coupure de phase 8W LED 78 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Directe, Reflector	Classe II SELV IP44/IP20	Coupure de phase	Encastré, Indoor / Outdoor Bornier sans vis	Ø94 x H56
	902523 Junistar Lux IsoSafe Acier brossé 620lm 4000K Ra 98 Coupure de phase 8W LED 78 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Directe, Reflector	Classe II SELV IP44/IP20	Coupure de phase	Encastré, Indoor Bornier sans vis	Ø94 x H56

Article	Protection	Convertisseurs	Montage/Connexion	Dimensions
 902529 Junistar Lux IsoSafe Graphite 620lm 4000K Ra 98 Coupure de phase 8W LED 78 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Directe, Reflector	Classe II SELV IP44/IP20	Coupure de phase	Encastré, Indoor / Outdoor Bornier sans vis	Ø94 x H56
 902520 Junistar Lux IsoSafe Blanc 620lm 4000K Ra 98 Coupure de phase 8W LED 78 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Directe, Reflector	Classe II SELV IP44/IP20	Coupure de phase	Encastré, Indoor / Outdoor Bornier sans vis	Ø94 x H56
Accessoires				
 9143 Rehab Ring Noir 133mm for Junistar, Uniled, Soft & Jupiter				Ø133 x L133 x W133 x H4
 9236 Rehab Ring Noir 180mm for Junistar, Uniled, Soft & Jupiter				Ø180 x H45
 9973 Rehab Ring Acier brossé 133mm for Junistar, Uniled, Soft & Jupiter				Ø133 x H4
 9233 Rehab Ring Graphite 133mm for Junistar, Uniled, Soft & Jupiter				Ø133 x L133 x W133 x H4
 9234 Rehab Ring Graphite 180mm for Junistar, Uniled, Soft & Jupiter				Ø180 x H45
 9327 Rehab Ring Graphite 250mm for Junistar, Uniled, Soft & Jupiter				Ø250 x H45
 9223 Rehab Ring Blanc 133mm for Junistar, Uniled, Soft & Jupiter				Ø133 x L133 x W133 x H4
 9224 Rehab Ring Blanc 180mm for Junistar, Uniled, Soft & Jupiter				Ø180 x H45

Article	Protection	Convertisseurs	Montage/Connexion	Dimensions
	9227			Ø250 x H45
	Rehab Ring Blanc 250mm for Junistar, Uniled, Soft & Jupiter			
	820489			L220 x W75 x H34
	Sensor Dim Box Blanc 200VA 200VA			
	8246094429			L270 x W75 x H35
	Boîtier d'éclairage de secours Driver DALI / EM Self test, DALI Secours 3H			
	820090			L250 x W13 x H13
	Boîtier d'éclairage de secours Adapter kit downlight			
	8246094364			L270 x W75 x H35
	Boîtier d'éclairage de secours On-Off/Coupure de phase / EM Selvtest, Secours 3 heures			
	8246094500			L270 x W75 x H35
	Boîtier d'éclairage de secours Driver DALI / EM DALI/Self test, Secours 3 heures			

• = Cet article est produit sur commande, avec un délai de livraison prévu de 3-4 semaines.