



Sense Surface

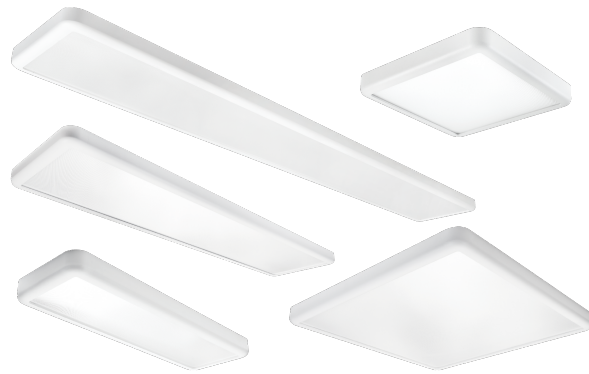

Sense Surface is an elegant, thin surface mounted luminaire, illuminated by a side light LED solution. Easy tool-free installation, with quick connector between bracket and the front is held by strong magnets with restraining strap. An innovative mechanism lets you choose whether the front should be totally flush with the ceiling for hidden cabling or floating slightly below for surface cabling.

Galerie de produits et d'environnements

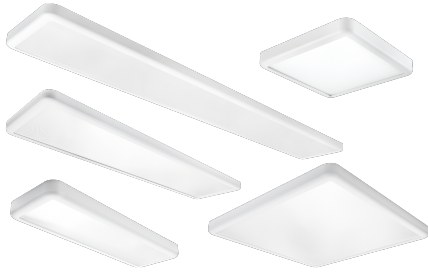

Article	Protection	Convertisseurs	Montage/Connexion	Dimensions
 212348 Sense Surface 640x200 Blanc 1830lm 2700K Ra>80 PIR Sensor 18W LED 102 lm/W SDCM:3 L80/B20>100,000 Directe, Opalprism	Classe II IP20 IK10	PIR Sensor	Surface, Indoor Bornier sans vis	L642 x W202 x H45
 212374 Sense Surface 640x200 Blanc 1830lm 2700K Ra>80 Coupure de phase 18W LED 102 lm/W SDCM:3 L80/B20>100,000 Directe, Opalprism	Classe II IP20 IK10	Coupure de phase	Surface, Indoor Bornier sans vis	L642 x W202 x H45
 212350 Sense Surface 600x600 Noir 3770lm 3000K Ra>80 Coupure de phase 30W LED 126 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Directe, Opalprism	Classe II IP20 IK10	Coupure de phase	Surface, Indoor Bornier sans vis	L597 x W597 x H45
 212351 Sense Surface 300x1200 Noir 3690lm 3000K Ra>80 Coupure de phase 30W LED 123 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Directe, Opalprism	Classe II IP20 IK10	Coupure de phase	Surface, Indoor Bornier sans vis	L1202 x W302 x H45
 212331 Sense Surface 600x600 Blanc 3640lm 3000K Ra>80 DALI-2 / Push Dim 28W LED 130 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Directe, Opalprism	Classe II IP20 IK10	DALI-2 / Push Dim	Surface, Indoor Bornier sans vis	L597 x W597 x H45
 212361 Sense Surface 300x1200 Blanc 3790lm 3000K Ra>80 DALI-2 / Push Dim 29W LED 131 lm/W SDCM:3	Classe II IP20 IK10	DALI-2 / Push Dim	Surface, Indoor Bornier sans vis	L1202 x W302 x H45

Article	L80/B20>100,000, L90>50,000	Protection	Convertisseurs	Montage/Connexion	Dimensions
	212344	Classe II	PIR Sensor	Surface, Indoor	L597 x W597 x H45
	Sense Surface 600x600 Blanc 3640lm 3000K Ra>80 PIR Sensor 28W LED 130 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Directe, Opalprism	IP20 IK10		Bornier sans vis	
	212346	Classe II	PIR Sensor	Surface, Indoor	L1202 x W302 x H45
	Sense Surface 300x1200 Blanc 3790lm 3000K Ra>80 PIR Sensor 29W LED 131 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Directe, Opalprism	IP20 IK10		Bornier sans vis	
	212349	Classe II	PIR Sensor	Surface, Indoor	L642 x W202 x H45
	Sense Surface 640x200 Blanc 1910lm 3000K Ra>80 PIR Sensor 18W LED 106 lm/W SDCM:3 L80/B20>100,000 Directe, Opalprism	IP20 IK10		Bornier sans vis	
	212330	Classe II	Coupure de phase	Surface, Indoor	L597 x W597 x H45
	Sense Surface 600x600 Blanc 3640lm 3000K Ra>80 Coupure de phase 28W LED 130 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Directe, Opalprism	IP20 IK10		Bornier sans vis	
	212360	Classe II	Coupure de phase	Surface, Indoor	L1202 x W302 x H45
	Sense Surface 300x1200 Blanc 3790lm 3000K Ra>80 Coupure de phase 29W LED 131 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Directe, Opalprism	IP20 IK10		Bornier sans vis	
	212375	Classe II	Coupure de phase	Surface, Indoor	L642 x W202 x H45
	Sense Surface 640x200 Blanc 1910lm 3000K Ra>80 Coupure de phase 18W LED 106 lm/W SDCM:3 L80/B20>100,000 Directe, Opalprism	IP20 IK10		Bornier sans vis	

Article	Protection	Convertisseurs	Montage/Connexion	Dimensions
 212392 Sense Surface 300x1600 Blanc 4910lm 3000K Ra>80 Coupure de phase 38W LED 129 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Directe, Opalprism	Classe II IP20 IK10	Coupure de phase	Surface, Indoor Bornier sans vis	L1582 x W302 x H45
 212394 Sense Surface 370x370 Blanc 1980lm 3000K Ra>80 Coupure de phase 17W LED 116 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Directe, Opalprism	Classe II IP20 IK10	Coupure de phase	Surface, Indoor Bornier sans vis	L370 x W370 x H45
 212403 Sense Surface 600x600 Noir 4010lm 4000K Ra>80 Coupure de phase 30W LED 134 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Directe, Opalprism	Classe II IP20 IK10	Coupure de phase	Surface, Indoor Bornier sans vis	L597 x W597 x H45
 212404 Sense Surface 300x1200 Noir 3870lm 4000K Ra>80 Coupure de phase 30W LED 129 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Directe, Opalprism	Classe II IP20 IK10	Coupure de phase	Surface, Indoor Bornier sans vis	L1202 x W302 x H45
 212338 Sense Surface 600x600 Blanc 3870lm 4000K Ra>80 DALI-2 / Push Dim 28W LED 138 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Directe, Opalprism	Classe II IP20 IK10	DALI-2 / Push Dim	Surface, Indoor Bornier sans vis	L597 x W597 x H45
 212368 Sense Surface 300x1200 Blanc 3980lm 4000K Ra>80 DALI-2 / Push Dim 29W LED	Classe II IP20 IK10	DALI-2 / Push Dim	Surface, Indoor Bornier sans vis	L1202 x W302 x H45

Article	137 lm/W SDCM:3	Protection	Convertisseurs	Montage/Connexion	Dimensions
	L80/B20>100,000, L90>50,000	Classe II	PIR Sensor	Surface, Indoor	L597 x W597 x H45
	Sense Surface 600x600 Blanc	IP20		Bornier sans vis	
	3870lm 4000K Ra>80 PIR Sensor	IK10			
	28W LED				
	138 lm/W SDCM:3				
	L80/B20>100,000, L90>50,000				
	Directe, Opalprism				
	212347	Classe II	PIR Sensor	Surface, Indoor	L1202 x W302 x H45
	Sense Surface 300x1200 Blanc	IP20		Bornier sans vis	
	3980lm 4000K Ra>80 PIR Sensor	IK10			
	29W LED				
	137 lm/W SDCM:3				
	L80/B20>100,000, L90>50,000				
	Directe, Opalprism				
	212326	Classe II	Coupure de phase	Surface, Indoor	L642 x W202 x H45
	Sense Surface 640x200 Blanc	IP20		Bornier sans vis	
	2030lm 4000K Ra>80 Coupure de phase	IK10			
	18W LED				
	113 lm/W SDCM:3				
	L80/B20>100,000				
	Directe, Opalprism				
	212337	Classe II	Coupure de phase	Surface, Indoor	L597 x W597 x H45
	Sense Surface 600x600 Blanc	IP20		Bornier sans vis	
	3870lm 4000K Ra>80 Coupure de phase	IK10			
	28W LED				
	138 lm/W SDCM:3				
	L80/B20>100,000, L90>50,000				
	Directe, Opalprism				
	212367	Classe II	Coupure de phase	Surface, Indoor	L1202 x W302 x H45
	Sense Surface 300x1200 Blanc	IP20		Bornier sans vis	
	3980lm 4000K Ra>80 Coupure de phase	IK10			
	29W LED				
	137 lm/W SDCM:3				
	L80/B20>100,000, L90>50,000				
	Directe, Opalprism				
	212399	Classe II	Coupure de phase	Surface, Indoor	L1582 x W302 x H45
	Sense Surface 300x1600 Blanc	IP20		Bornier sans vis	
	5240lm 4000K Ra>80 Coupure de phase	IK10			
	38W LED				
	138 lm/W SDCM:3				
	L80/B20>100,000, L90>50,000				
Accessoires					



Article	Directe, Opalprism	Protection	Convertisseurs	Montage/Connexion	Dimensions
	212255				L596 x W35 x H17
	T-profil Blanc Rail de suspension 600mm				
	212234				L2000
	Sense Surface/Disc 760 2m Kit suspension				
	820307				L137 x W27 x H27
	Batterie pour éclairage de secours 3 Hours 3.0Ah - Model No: B093				