



Sense Round TW

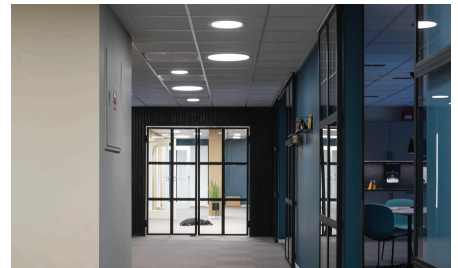

Sense luminaire used as replacement or alternative for a normal downlight. Very low profile and quick connection between luminaire and driver as well as tool-free connection in junction box with loop for easy and quick installation. High efficiency up to 105 lm/W and low glare rating makes Sense the obvious choice in many applications. Tunable White 2700-6500K LED Dim or DALI Type 8.

Galerie de produits et d'environnements

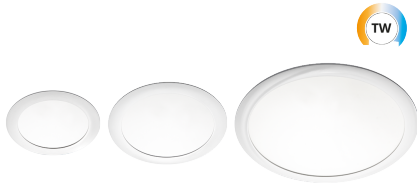

Article	Protection	Convertisseurs	Montage/Connexion	Dimensions
 212302 Sense TW Blanc 255 IsoSafe 1270lm 2700-6500K Ra>80 TW DALI Type 8 15W LED 85 lm/W SDCM:3 L80/B20>50,000, L90>50,000 Directe, Opale	Classe II SELV IP40/IP20 IK08	TW DALI Type 8	Encastré, Indoor	Ø255
 212304 Sense TW Blanc 320 IsoSafe 1610lm 2700-6500K Ra>80 TW DALI Type 8 19W LED 85 lm/W SDCM:3 L80/B20>100.000 (50.000 as IsoSafe), L90>50,000 Directe, Opale	Classe II SELV IP40/IP20 IK08	TW DALI Type 8	Encastré, Indoor	Ø320
 212306 Sense TW Blanc 495 3290lm 2700-6500K Ra>80 TW DALI Type 8 36W LED 91 lm/W SDCM:3 L80/B20>50,000, L90>50,000 Directe, Opale	Classe II SELV IP40/IP20 IK08	TW DALI Type 8	Encastré, Indoor	Ø495 x H29
 212301 Sense TW Blanc 255 IsoSafe 1270lm 2700-6500K Ra>80 TW LEDDim 15W LED 85 lm/W SDCM:3 L80/B20>100.000 (50.000 as IsoSafe), L90>50,000 Directe, Opale	Classe II SELV IP40/IP20 IK08	TW LEDDim	Encastré, Indoor	Ø255
 212303 Sense TW Blanc 320 IsoSafe 1830lm 2700-6500K Ra>80 TW LEDDim 19W LED 96 lm/W SDCM:3 L80/B20>50,000, L90>50,000 Directe, Opale	Classe II SELV IP40/IP20 IK08	TW LEDDim	Encastré, Indoor	Ø320
 212305 Sense TW Blanc 495 3770lm (@6500K) 2700-6500K Ra>80 TW LEDDim 36W LED 105 lm/W SDCM:3 L80/B20>50,000, L90>50,000 Directe, Opale	Classe II SELV IP40/IP20 IK08	TW LEDDim	Encastré, Indoor	Ø495 x H29

Accessoires



8246094429

L270 x W75 x H35

Boîtier d'éclairage de secours Alimen. DALI / EM Self test, DALI Secours 3H



8246094364

L270 x W75 x H35

Boîtier d'éclairage de secours On-Off/Coupure de phase / EM Selvtest, Secours 3 heures



8246094500

L270 x W75 x H35

Boîtier d'éclairage de secours Alim. DALI / EM DALI/Self test, Secours 3 heures