

Uniled IsoSafe Blade




Attractive downlight for indoor and outdoor use. Certified Airtight from below via membrane between ceiling and downlight ring and mounting directly in insulation. Well integrated LED chip, dimmable via phase-dimming or DALI driver (not IsoSafe). Made of die-cast powder-coated aluminium or brushed steel (only indoors), glass diffuser. 42-degree scattering angle via reflector. 35 mm in total height, Flexible hole dimensions Ø76–Ø83. Tool-free mounting in mounting box for direct 230 V with loopable quick clips and automatic strain relief. IP54, KL II.


Uniled IsoSafe Blade



Galerie de produits et d'environnements

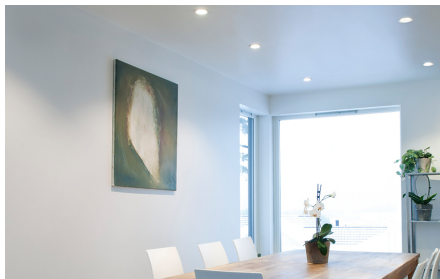

Uniled IsoSafe Blade

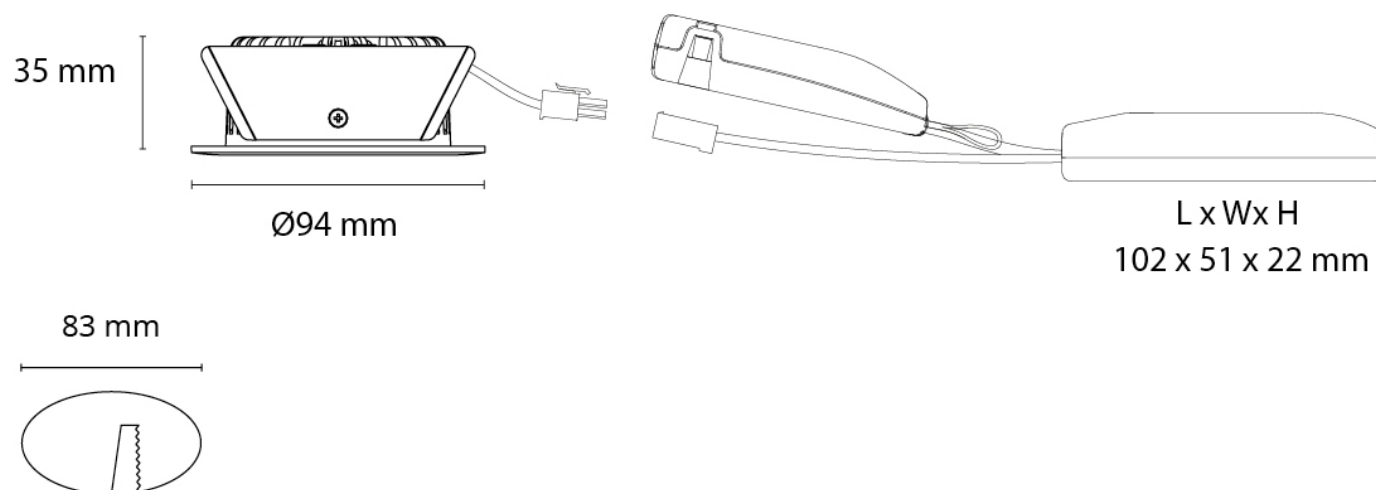

Pour les dimensions des dessins, veuillez consulter les codes de chaque article à la page suivante

Article	Protection	Convertisseurs	Montage/Connexion	Dimensions
 904335 UniLED IsoSafe Blade Noir 660lm 2700K Ra 98 Coupure de phase 8.5W LED 78 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Directe, Reflector	Classe II SELV IP54/IP20	Coupure de phase	Encastré, Indoor / Outdoor Bornier sans vis	Ø94 x H37
 904334 UniLED IsoSafe Blade Blanc 670lm 2700K Ra 98 Coupure de phase 8.5W LED 79 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Directe, Reflector	Classe II SELV IP54/IP20	Coupure de phase	Encastré, Indoor / Outdoor Bornier sans vis	Ø94 x H37
 904333 UniLED IsoSafe Blade Noir 680lm 3000K Ra 98 Coupure de phase 8.5W LED 80 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Directe, Reflector	Classe II SELV IP54/IP20	Coupure de phase	Encastré, Indoor / Outdoor Bornier sans vis	Ø94 x H37
 904332 UniLED IsoSafe Blade Acier brossé 690lm 3000K Ra 98 Coupure de phase 8.5W LED 81 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Directe, Reflector	Classe II SELV IP54/IP20	Coupure de phase	Encastré, Indoor Bornier sans vis	Ø94 x H37
 904331 UniLED IsoSafe Blade Blanc 690lm 3000K Ra 98 Coupure de phase 8.5W LED 81 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Directe, Reflector	Classe II SELV IP54/IP20	Coupure de phase	Encastré, Indoor / Outdoor Bornier sans vis	Ø94 x H37
Accessoires				
 820090 Boîtier d'éclairage de secours Adapter kit downlight				L250 x W13 x H13



Article	Protection	Convertisseurs	Montage/Connexion	Dimensions
	8246094364			L270 x W75 x H35
Boîtier d'éclairage de secours On-Off/Coupure de phase / EM Selvtest, Secours 3 heures				