

Uniled IsoSafe DimToWarm




Attractive downlight for indoor and outdoor use. Mounted directly in concrete via the special blade spring system. Well integrated LED chip, dimmable via phase-dimming or DALI driver (not IsoSafe). Made of die-cast powder-coated aluminium or brushed steel (only indoors), glass diffuser. 42-degree scattering angle via reflector. 35 mm in total height, Flexible hole dimensions Ø76–Ø83. Tool-free mounting in mounting box for direct 230 V with loopable quick clips and automatic strain relief. IP54, KL II


Uniled IsoSafe DimToWarm



Galerie de produits et d'environnements

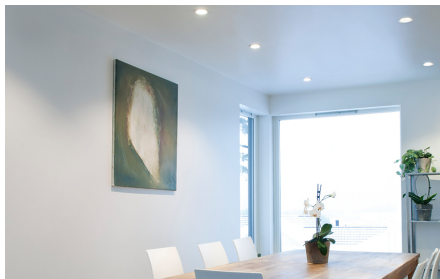


Uniled IsoSafe DimToWarm

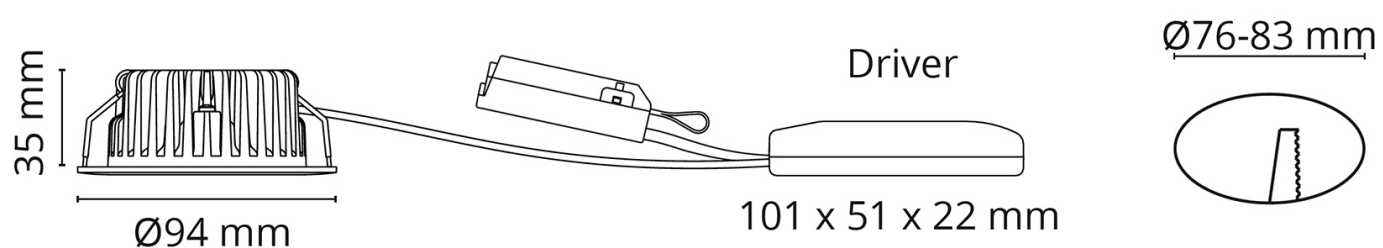

Pour les dimensions des dessins, veuillez consulter les codes de chaque article à la page suivante

Article	Protection	Convertisseurs	Montage/Connexion	Dimensions
 904211 UniLED IsoSafe DimToWarm Blanc 560lm 2000-2800K Ra>95 Coupure de phase 7.3W LED 77 lm/W SDCM:3 L90/B10>50,000 Beam: 42°, Directe, Reflector	Classe II SELV IP54/IP20	Coupure de phase	Encastré, Indoor / Outdoor Bornier sans vis	Ø94 x H37
Accessoires				
 9143 Rehab Ring Noir 133mm for Junistar, Uniled, Soft & Jupiter				Ø133 x L133 x W133 x H4
 9236 Rehab Ring Noir 180mm for Junistar, Uniled, Soft & Jupiter				Ø180 x H45
 9973 Rehab Ring Acier brossé 133mm for Junistar, Uniled, Soft & Jupiter				Ø133 x H4
 9233 Rehab Ring Graphite 133mm for Junistar, Uniled, Soft & Jupiter				Ø133 x L133 x W133 x H4
 9234 Rehab Ring Graphite 180mm for Junistar, Uniled, Soft & Jupiter				Ø180 x H45
 9327 Rehab Ring Graphite 250mm for Junistar, Uniled, Soft & Jupiter				Ø250 x H45
 9223 Rehab Ring Blanc 133mm for Junistar, Uniled, Soft & Jupiter				Ø133 x L133 x W133 x H4
 9224 Rehab Ring Blanc 180mm for Junistar, Uniled, Soft & Jupiter				Ø180 x H45
 9227 Rehab Ring Blanc 250mm for Junistar, Uniled, Soft & Jupiter				Ø250 x H45
 820090 Boîtier d'éclairage de secours Adapter kit downlight				L250 x W13 x H13



Article	Protection	Convertisseurs	Montage/Connexion	Dimensions
 8246094364 Boîtier d'éclairage de secours On-Off/Coupure de phase / EM Selvtest, Secours 3 heures				L270 x W75 x H35