


Disc 285x285





Energy efficient surface-mounted LED luminaire with a slim profile ensuring a modern look. Square and round available in multiple sizes and lumens. Opalprismatic diffuser provides a glare-free light. The luminaire is produced in a matt black or white powder-coated aluminium finish. Dimmable using a DALI or phase control dimmer. We recommend LEDDim 400 and LEDDim Smart. Simple installation with quick connections between fixture and back plate that can be screwed straight onto all known ceiling boxes. Visible cabling also possible. Also supplied with a sensor and/or emergency light.

Disc 285x285

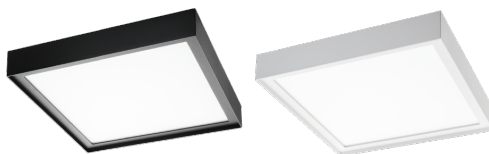

Galerie de produits et d'environnements

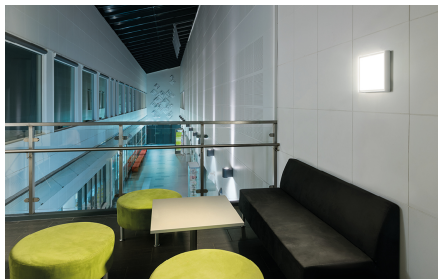

Article		Protection	Convertisseurs	Montage/Connexion	Dimensions
	606075 Disc 285X285 Noir 2000lm 2700K Ra>80 DALI-2 20W LED 100 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	DALI-2	Surface, Indoor Bornier sans vis	L283 x W283 x H55
	606080 • Disc 285X285 Noir 2000lm 2700K Ra>80 Secours 3H/coupure de phase 20W LED 100 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Secours 3H/coupure de phase	Surface, Indoor Bornier sans vis	L283 x W283 x H55
	606072 • Disc 285X285 Noir 2000lm 2700K Ra>80 Sensor Dim 20W LED 100 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Sensor Dim	Surface, Indoor Bornier sans vis	L283 x W283 x H55
	606069 Disc 285X285 Noir 2000lm 2700K Ra>80 Coupure de phase 20W LED 100 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Coupure de phase	Surface, Indoor Bornier sans vis	L283 x W283 x H55
	606058 • Disc 285X285 Blanc 2080lm 2700K Ra>80 DALI-2 / Push Dim 22W LED 95 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	DALI-2 / Push Dim	Surface, Indoor Bornier sans vis	L283 x W283 x H55
	606063 • Disc 285X285 Blanc 2080lm 2700K Ra>80 Secours 3H/coupure de phase 22W LED 95 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Secours 3H/coupure de phase	Surface, Indoor Bornier sans vis	L283 x W283 x H55

Article	Protection	Convertisseurs	Montage/Connexion	Dimensions
 606055 • Disc 285X285 Blanc 2080lm 2700K Ra>80 Sensor Dim 22W LED 95 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Sensor Dim	Surface, Indoor Bornier sans vis	L283 x W283 x H55
 606052 Disc 285X285 Blanc 2080lm 2700K Ra>80 Coupure de phase 22W LED 95 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Coupure de phase	Surface, Indoor Bornier sans vis	L283 x W283 x H55
 606076 Disc 285X285 Noir 2100lm 3000K Ra>80 DALI-2 / Push Dim 20W LED 105 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	DALI-2 / Push Dim	Surface, Indoor Bornier sans vis	L283 x W283 x H55
 606081 • Disc 285X285 Noir 2100lm 3000K Ra>80 Secours 3H/coupure de phase 20W LED 105 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Secours 3H/coupure de phase	Surface, Indoor Bornier sans vis	L283 x W283 x H55
 606073 • Disc 285X285 Noir 2100lm 3000K Ra>80 Sensor Dim 20W LED 105 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Sensor Dim	Surface, Indoor Bornier sans vis	L283 x W283 x H55
 606070 Disc 285X285 Noir 2100lm 3000K Ra>80 Coupure de phase 20W LED 105 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Coupure de phase	Surface, Indoor Bornier sans vis	L283 x W283 x H55

Article	Protection	Convertisseurs	Montage/Connexion	Dimensions
 606059 Disc 285X285 Blanc 2280lm 3000K Ra>80 DALI-2 / Push Dim 20W LED 114 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	DALI-2 / Push Dim	Surface, Indoor Bornier sans vis	L283 x W283 x H55
 606064 • Disc 285X285 Blanc 2280lm 3000K Ra>80 Secours 3H/coupure de phase 20W LED 114 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Secours 3H/coupure de phase	Surface, Indoor Bornier sans vis	L283 x W283 x H55
 606056 Disc 285X285 Blanc 2190lm 3000K Ra>80 Sensor Dim 22W LED 100 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Sensor Dim	Surface, Indoor Bornier sans vis	L283 x W283 x H55
 606053 Disc 285X285 Blanc 2280lm 3000K Ra>80 Coupure de phase 20W LED 114 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Directe, Opalprism	Classe II IP20 IK10	Coupure de phase	Surface, Indoor Bornier sans vis	L283 x W283 x H55
Accessoires				
 606095 Disc/Frosta Noir Suspension Adaptateur				L5000 x W102 x H22
 606094 Disc/Frosta Blanc Suspension Adaptateur				L5000 x W102 x H22
 820307 Batterie pour éclairage de secours 3 Hours 3.0Ah - Model No: B093				L137 x W27 x H27

• = Cet article est produit sur commande, avec un délai de livraison prévu de 3-4 semaines.