Inspire R

Inspire R is a rectangular recessed downlight for indoor use. With cubist black reflectors it has very low glare and harmonious non-flickering light with a well-defined light pattern. Inspire R is suitable for use in high-end residential and commercial environments.

Inspire R

Galerie de produits et d’environnements

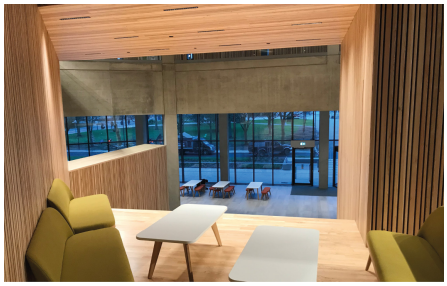

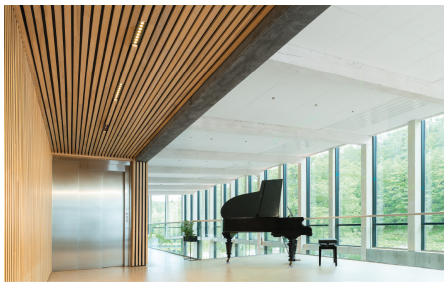

Codes-articles

Article		Protection	Convertisseurs	Montage/Connexion	Dimensions
	212422 **Inspire R Noir 150 450lm 2700K Ra 98 DALI-2 / Push Dim 8W LED** 56 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Directe, Lentille	**Classe II SELV** **IP20**	DALI-2 / Push Dim	Encastré, Indoor Bornier sans vis	L163 x W62 x H40
	212428 **Inspire R Noir 300 900lm 2700K Ra 98 DALI-2 / Push Dim 15W LED** 60 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Directe, Lentille	**Classe II SELV** **IP20**	DALI-2 / Push Dim	Encastré, Indoor Bornier sans vis	L303 x W62 x H40
	212421 **Inspire R Noir 150 450lm 2700K Ra 98 Coupure de phase 8W LED** 56 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Directe, Lentille	**Classe II SELV** **IP20**	Coupure de phase	Encastré, Indoor Bornier sans vis	L163 x W62 x H40
	212427 **Inspire R Noir 300 900lm 2700K Ra 98 Coupure de phase 15W LED** 60 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Directe, Lentille	**Classe II SELV** **IP20**	Coupure de phase	Encastré, Indoor Bornier sans vis	L303 x W62 x H40
	212416 **Inspire R Blanc 150 450lm 2700K Ra 98 DALI-2 / Push Dim 8W LED** 56 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Directe, Lentille	**Classe II SELV** **IP20**	DALI-2 / Push Dim	Encastré, Indoor Bornier sans vis	L163 x W62 x H40
	212434 **Inspire R Blanc 300 900lm 2700K Ra 98 DALI-2 / Push Dim 15W LED** 60 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Directe, Lentille	**Classe II SELV** **IP20**	DALI-2 / Push Dim	Encastré, Indoor Bornier sans vis	L303 x W62 x H40

Codes-articles

Article		Protection	Convertisseurs	Montage/Connexion	Dimensions
	212415 **Inspire R Blanc 150 450lm 2700K Ra 98 Coupure de phase 8W LED** 56 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Directe, Lentille	**Classe II SELV** **IP20**	Coupure de phase	Encastré, Indoor Bornier sans vis	L163 x W62 x H40
	212433 **Inspire R Blanc 300 900lm 2700K Ra 98 Coupure de phase 15W LED** 60 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Directe, Lentille	**Classe II SELV** **IP20**	Coupure de phase	Encastré, Indoor Bornier sans vis	L303 x W62 x H40
	212424 **Inspire R Noir 150 470lm 3000K Ra 98 DALI-2 / Push Dim 8W LED** 59 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Directe, Lentille	**Classe II SELV** **IP20**	DALI-2 / Push Dim	Encastré, Indoor Bornier sans vis	L163 x W62 x H40
	212430 **Inspire R Noir 300 950lm 3000K Ra 98 DALI-2 / Push Dim 15W LED** 63 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Directe, Lentille	**Classe II SELV** **IP20**	DALI-2 / Push Dim	Encastré, Indoor Bornier sans vis	L303 x W62 x H40
	212423 **Inspire R Noir 150 470lm 3000K Ra 98 Coupure de phase 8W LED** 59 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Directe, Lentille	**Classe II SELV** **IP20**	Coupure de phase	Encastré, Indoor Bornier sans vis	L163 x W62 x H40
	212429 **Inspire R Noir 300 950lm 3000K Ra 98 Coupure de phase 15W LED** 63 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Directe, Lentille	**Classe II SELV** **IP20**	Coupure de phase	Encastré, Indoor Bornier sans vis	L303 x W62 x H40

Codes-articles

Article		Protection	Convertisseurs	Montage/Connexion	Dimensions
	212418 **Inspire R Blanc 150 470lm 3000K Ra 98 DALI-2 / Push Dim 8W LED** 59 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Directe, Lentille	**Classe II SELV** **IP20**	DALI-2 / Push Dim	Encastré, Indoor Bornier sans vis	L163 x W62 x H40
	212436 **Inspire R Blanc 300 950lm 3000K Ra 98 DALI-2 / Push Dim 15W LED** 63 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Directe, Lentille	**Classe II SELV** **IP20**	DALI-2 / Push Dim	Encastré, Indoor Bornier sans vis	L303 x W62 x H40
	212417 **Inspire R Blanc 150 470lm 3000K Ra 98 Coupure de phase 8W LED** 59 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Directe, Lentille	**Classe II SELV** **IP20**	Coupure de phase	Encastré, Indoor Bornier sans vis	L163 x W62 x H40
	212435 **Inspire R Blanc 300 950lm 3000K Ra 98 Coupure de phase 15W LED** 63 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Directe, Lentille	**Classe II SELV** **IP20**	Coupure de phase	Encastré, Indoor Bornier sans vis	L303 x W62 x H40
	212426 **Inspire R Noir 150 490lm 4000K Ra 98 DALI-2 / Push Dim 8W LED** 61 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Directe, Lentille	**Classe II SELV** **IP20**	DALI-2 / Push Dim	Encastré, Indoor Bornier sans vis	L163 x W62 x H40
	212432 **Inspire R Noir 300 980lm 4000K Ra 98 DALI-2 / Push Dim 15W LED** 65 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Directe, Lentille	**Classe II SELV** **IP20**	DALI-2 / Push Dim	Encastré, Indoor Bornier sans vis	L303 x W62 x H40

Codes-articles

Article		Protection	Convertisseurs	Montage/Connexion	Dimensions
	212425 **Inspire R Noir 150 490lm 4000K Ra** **98 Coupure de phase** **8W LED** 61 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Directe, Lentille	**Classe II SELV** **IP20**	Coupure de phase	Encastré, Indoor Bornier sans vis	L163 x W62 x H40
	212431 **Inspire R Noir 300 980lm 4000K Ra** **98 Coupure de phase** **15W LED** 65 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Directe, Lentille	**Classe II SELV** **IP20**	Coupure de phase	Encastré, Indoor Bornier sans vis	L303 x W62 x H40
	212420 **Inspire R Blanc 150 490lm 4000K Ra** **98 DALI-2 / Push Dim** **8W LED** 61 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Directe, Lentille	**Classe II SELV** **IP20**	DALI-2 / Push Dim	Encastré, Indoor Bornier sans vis	L163 x W62 x H40
	212438 **Inspire R Blanc 300 980lm 4000K Ra** **98 DALI-2 / Push Dim** **15W LED** 65 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Directe, Lentille	**Classe II SELV** **IP20**	DALI-2 / Push Dim	Encastré, Indoor Bornier sans vis	L303 x W62 x H40
	212419 **Inspire R Blanc 150 490lm 4000K Ra** **98 Coupure de phase** **8W LED** 61 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Directe, Lentille	**Classe II SELV** **IP20**	Coupure de phase	Encastré, Indoor Bornier sans vis	L163 x W62 x H40
	212437 **Inspire R Blanc 300 980lm 4000K Ra** **98 Coupure de phase** **15W LED** 65 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Directe, Lentille	**Classe II SELV** **IP20**	Coupure de phase	Encastré, Indoor Bornier sans vis	L303 x W62 x H40

Accessoires

Codes-articles

Article		Protection	Convertisseurs	Montage/Connexion	Dimensions
	212482 **Inspire Or 150 Réflecteur**				L140 x W38 x H16
	212483 **Inspire Or 300 Réflecteur**				L280 x W38 x H16
	212480 **Inspire Blanc 150 Réflecteur**				L140 x W38 x H16
	212481 **Inspire Blanc 300 Réflecteur**				L280 x W38 x H16
	820090 **Boîtier d'éclairage de secours Adapter kit downlight**				L250 x W13 x H13
	8246094364 **Boîtier d'éclairage de secours On-Off/Coupure de phase / EM Selvtest, Secours 3 heures**				L270 x W75 x H35
	8246094500 **Boîtier d'éclairage de secours Alim. DALI / EM DALI/Self test, Secours 3 heures**				L270 x W75 x H35