



Attractive downlight for indoor use with 30-degree 360-degree stepless tilt. Well integrated LED chip and dimmable Phase cut-off. Made of die-cast powder-coated aluminium or brushed steel, glass diffuser. 42-degree scattering angle via reflector. Low recessed downlight with hole size Ø83mm. Tool-free mounting in mounting box for direct 230 V with loopable quick clips and automatic strain relief. IP44, KL III with dedicated circuit.

Junistar Square /x2




Immagini del prodotto e dell'ambiente



Junistar Square /x2

Sg

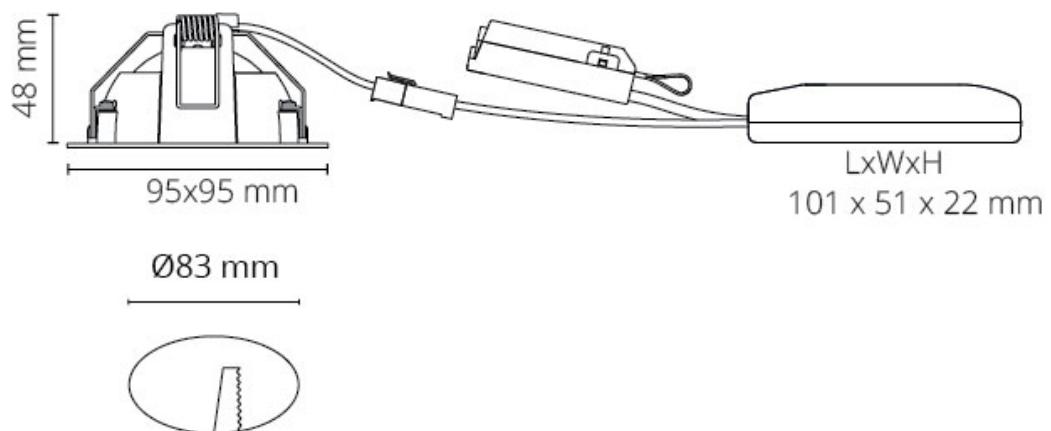

Per le dimensioni dei disegni si vedano i codici dei singoli articoli nella pagina successiva.

Articolo	Protezione	Apparecchiatura	Montaggio/Collegamento	Dimensioni
		a di controllo		
Accessori				
	820489			L220 x W75 x H34
	Sensore Dim Box Bianco 200VA			
	8246094429			L270 x W75 x H35
	Scatola per luci di emergenza Autotest del driver DALI / EM, DALI Luce di emergenza 3 ore			
	820090			L250 x W13 x H13
	Scatola per luci di emergenza Kit adattatore per downlight			
	8246094364			L270 x W75 x H35
	Scatola per luci di emergenza On-Off/Taglio di fase / Autotest EM, Luce di emergenza 3 ore			
	8246094500			L270 x W75 x H35
	Scatola per luci di emergenza Driver DALI / EM DALI/Autotest, Luce di emergenza 3 ore			