


Lineal Surface Connect




Version of Lineal Surface which comes complete with driver and integrated wireless SG Connect sensor. The sensor is discreetly positioned at the edge, switches on when it detects movement and switches off after a pre-selected period of time to save energy. The sensor also includes an integrated daylight sensor. If this function is activated, the sensor will constantly work to provide the desired amount of light in its work area. The lighting control is easy to configure using the SG Connect Commissioning App, and the luminaire can be used individually or as part of a larger system, which can easily be enlarged or reconfigured as needed.

Lineal Surface Connect

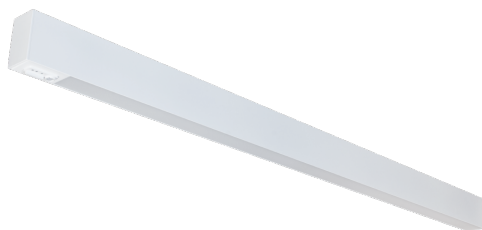

Immagini del prodotto e dell'ambiente

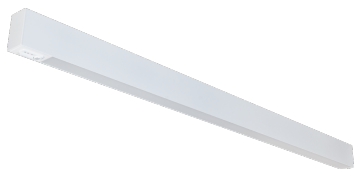



Articolo	Protezione	Apparecchiatura di controllo	Montaggio/Collegamento	Dimensioni
 9341000675 Lineal surface 1400 Bianco 2320lm 3000K Ra>80 Connect 21W Lampade fluorescenti compatte 110 lm/W SDCM:3 L80/B10>100.000, L93/>50.000 Diretto,	Classe I IP20	Connect	Montaggio a superficie, Indoor	L1472 x W42 x H70
 9341000818 Lineal surface 1120 Bianco 1870lm 3000K Ra>80 Connect 17W Lampade fluorescenti compatte 110 lm/W SDCM:3 L80/B10>100.000, L93/>50.000 Diretto,	Classe I IP20	Connect	Montaggio a superficie, Indoor	L1192 x W42 x H70
 9341000882 Lineal surface 840 Bianco 1380lm 3000K Ra>80 Connect 13W Lampade fluorescenti compatte 106 lm/W SDCM:3 L80/B10>100.000, L93/>50.000 Diretto,	Classe I IP20	Connect	Montaggio a superficie, Indoor	L912 x W42 x H70
Accessori				
 8241000355 Lineal T-ceiling Extension kit Bianco				L120 x W94 x H65
 8249045116 Lineal Set di fili 1 x 2 m				