

Sense TW 300x1200 Hvid Opalprismatisk 4000lm 2700-6500K Ra>80

EAN: 7021982123160
 SG varenr.: 212316
 Erstatte: 212300

**Lysteknik**

Lyskilde: LED
 Lumen output: 4000lm
 Farvetemperatur: 2700-6500K
 Farvegengivelse (CRI): Ra>80
 MacAdams faktor: SDCM: 3
 Levetid: L80/B20>50.000
 Lysfordeling: Direkte
 Optik: Opalprismatisk
 Lysspredning: 110°
 Fotobiologisk sikkerhed: RG 0

Beskyttelse

Isolationsklasse: Klasse III

Energi og godkendelser

Indeholder lyskilde med energiklasse: E

Materialer og overflader

Materiale: Aluminium
 Farve: White smooth (Ral 9016 gloss 30)
 Afskærmningsmateriale: Akryl (PMMA)

Montering/Tilslutning


Montering: Indbygget, Interiør
 Modul: 300x1200 Synlig t-skinne, T/L 15/24mm
 Tilslutning: Quick connector

Dimensioner

Længde (mm) L: 1197
 Brede (mm) W: 297
 Højde (mm) H: 10
 Vægt (kg) brutto/netto: 4,1 / 4,5

Forpakning


Forpakkingsstørrelse (mm): 1240 x 330 x 45

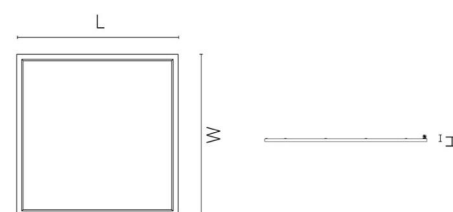**DRIVER OPTIONS****Tunable White 1000mA / 1050mA • 42W / 40W • 4000lm**

TW LEDDim Driver - 3-pol Linect
 1000mA • 4000lm • 42W • Class II
 Prod.nr. 820093
 NO.E.nr. 66 008 53
 SE.E.nr. 79 818 49
 F.I.E.nr. 40 033 32
 EAN 702198200933



TW DALI TB - 5-pol Linect
 1050mA • 4000lm • 40W • Class II
 Prod.nr. 820239
 NO.E.nr. 66 011 73
 SE.E.nr. 79 821 68
 F.I.E.nr. 40 033 68
 EAN 702198202395

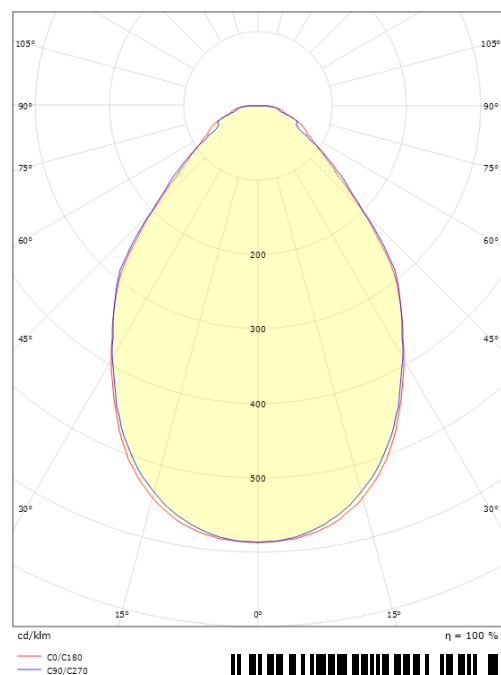

— C0/C180
 — C90/C270



7 0 2 1 9 8 2 1 2 3 1 6 0