

## Sense Clean 600x600 Hvid 5000lm Prisme 5046lm 4000K Ra>90

EAN: 7021982121654  
 SG varenr.: 212165



### Elektrisk

Systemeffekt (W): 48W

### Lysteknik

Lyskilde: LED  
 Lumen output: 5046lm  
 Effekt: 105 lm/W  
 Farvetemperatur: 4000K  
 Farvegengivelse (CRI): Ra>90  
 MacAdams faktor: SDCM: 3  
 Levetid: L80/B20>50.000  
 Lysfordeling: Direkte  
 Optik: Opalprismatisk  
 Lysspredning: 110°  
 Fotobiologisk sikkerhed: RG 0

### Beskyttelse

Isolationsklasse: Klasse III

### Energi og godkendelser

Indeholder lyskilde med energiklasse: D

### Materialer og overflader

Materiale: Aluminium  
 Farve: Hvid  
 Afskærmningsmateriale: Polycarbonat (PC)

### Montering/Tilslutning


Montering: Indbygget, Interiør  
 Modul: 600x600 Synlig t-skinne, T/L 15/24mm  
 Tilslutning: Quick connector

### Dimensioner

Længde (mm) L: 597  
 Bredde (mm) W: 597  
 Højde (mm) H: 10  
 Vægt (kg) brutto/netto: 4.055 / 4.454

### Forpakning

Forpakkingsstørrelse (mm): 645 x 640 x 43



### DRIVER & EMERGENCY OPTIONS

#### 1400mA • 46W • 5000lm

On/Off Driver - Schuco  
 1400mA • 5000lm • 46W • Class I  
 Prod.nr. 820082  
 NO-E.nr. 66 000 75  
 SE-E.nr. 79 813 72  
 F.R.E.nr. 40 033 04  
 EAN 702198200827



DALI / 1-10V Driver - 5-pole Linect  
 1400mA • 5000lm • 46W • Class I  
 Prod.nr. 820085  
 NO-E.nr. 66 000 78  
 SE-E.nr. 79 813 75  
 F.R.E.nr. 40 033 05  
 EAN 702198200858



On/Off Driver - 5-pole Linect  
 1400mA • 5000lm • 46W • Class I  
 Prod.nr. 820402  
 NO-E.nr. 66 000 57  
 SE-E.nr. 79 818 68  
 F.R.E.nr. 40 033 09  
 EAN 702198204023




#### External Emergency Box • 3 hours Emergency

Emergency box  
 On-Off/Phase Dim / Emergency Self test  
 Prod.nr. 094864  
 NO-E.nr. 66 004 43  
 SE-E.nr. 73 445 88  
 F.R.E.nr. 42 239 38  
 EAN 5703821177276



Emergency box  
 Driver DALI / Emergency DALI Self test  
 Prod.nr. 094506  
 NO-E.nr. 66 006 04  
 SE-E.nr. 73 453 02  
 F.R.E.nr. 42 255 22  
 EAN 5703821177504

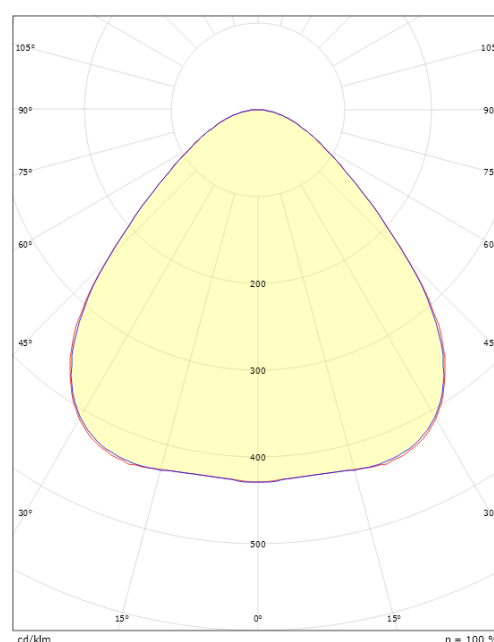

7 0 2 1 9 8 2 1 2 1 6 5 4