


Environmental product declaration

in accordance with ISO 14025 and EN 15804+A2

Front mount box airtight

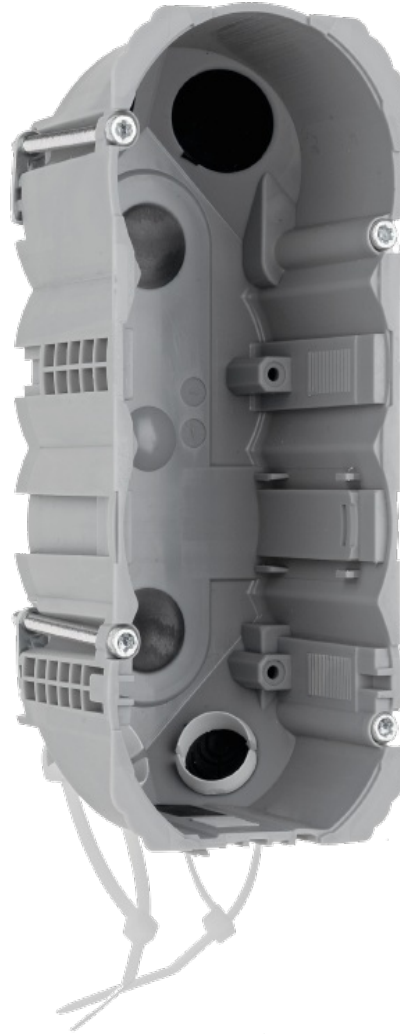

Owner of the declaration:

SG Armaturen AS

Product:

Front mount box airtight

Declared unit:

1 pcs

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A2:2019, EN 50693:2019 and PCR EPD Italy 007.

PCR EPD Italy 007 - Electronic and electrical products and systems - Other electronics

Program operator:

The Norwegian EPD Foundation

Declaration number:

NEPD-9747-9685

Registration number:

NEPD-9747-9685

Issue date:

11.04.2025

Valid to:

11.04.2030

EPD software:

LCAno EPD generator ID: 910821

The Norwegian EPD Foundation

General information

Product

Front mount box airtight

Program operator:

The Norwegian EPD Foundation
Post Box 5250 Majorstuen, 0303 Oslo, Norway
Phone: +47 977 22 020
web: www.epd-norge.no

Declaration number:

NEPD-9747-9685

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A2:2019, EN 50693:2019 and PCR EPD Italy 007.
PCR EPD Italy 007 - Electronic and electrical products and systems - Other electronics

Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

Declared unit:

1 pcs Front mount box airtight

Declared unit with option:

A1, A2, A3, A4, A5, C1, C2, C3, C4, D

Functional unit:

1 pc Front mount box airtight manufactured and installed, including waste treatment at end-of-life.

General information on verification of EPD from EPD tools:

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Verification of each EPD is made according to EPD-Norway's guidelines for verification and approval requiring that tools are i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPD-Norway, and iii) the process is reviewed annually by an independent third party verifier. See Appendix G of EPD-Norway's General Programme Instructions for further information on EPD tools

Verification of EPD tool:

Independent third party verification of the EPD tool, background data and test-EPD in accordance with EPDNorway's procedures and guidelines for verification and approval of EPD tools. Approval number: NEPDT78.

Third party verifier:

Elisabet Amat, GREENIZE projects

(no signature required)

Owner of the declaration:

SG Armaturen AS
Contact person: Audun Skare
Phone: +47 90021243
e-mail: audun.skare@sg-as.no

Manufacturer:

SG Armaturen AS
Skytterheia 25
4790 Lillesand, Norway

Place of production:

SG Armaturen production site FT (China)

, China

Management system:

Organisation no:

958560931

Issue date:

11.04.2025

Valid to:

11.04.2030

Year of study:

2023

Comparability:

EPD for electronic and electrical products and systems may not be comparable if they do not comply with similar PCR standards.

Development and verification of EPD:

The declaration is created using EPD tool lca.tools ver EPD2022.03, developed by LCA.no. The EPD tool is integrated in the company's management system, and has been approved by EPD Norway. NEPDT63

Developer of EPD: Benedikte Ruud Andersen

Reviewer of company-specific input data and EPD: Audun Skare

Approved:



Håkon Hauan, CEO EPD-Norge

Product

Product description:

Box for installation in plaster/fermacell and other types of cavity walls and ceilings. The boxes can be installed with DESIGN+C frames. The boxes can be installed in wall thicknesses from 9 to 40 mm via the attached claw pieces. A 57 mm hole saw must be used. Auxiliary tools for mounting the SG Install front box are used. The boxes are windproof IP40. All SG install units can be installed in the boxes, and are 100% compatible with all inserts from LK Fuga installation equipment.

IP Class: IP40. Material: PP/TPV. Colour: Grey. Modul: 2.5M. Length (mm): 134. Width (mm): 56. Height (mm): 50. EAN: 7021985939812.

The EPD also covers the following products:

EAN: 7021985939515 - FRONT MOUNT BOX AIRTIGHT 1M

EAN: 7021985939614 - FRONT MOUNT BOX AIRTIGHT 1.5M

EAN: 7021985939713 - FRONT MOUNT BOX AIRTIGHT 2M

Product specification

| Materials | kg | % |
|------------------------------|--------|--------|
| Metal - Steel low alloy | 0,0065 | 13,15 |
| Plastic - Polypropylene (PP) | 0,042 | 86,84 |
| Total | 0,049 | 100,00 |

| Packaging | kg | % |
|-----------------------|------|--------|
| Packaging - Cardboard | 0,01 | 100,00 |
| Total incl. packaging | 0,06 | 100,00 |

Technical data:

Link to product data on our website:

https://www.sg-as.com/da/produkter/forfradaser/7021985939812/pdf/specifikation_7021985939812.pdf

Market:

Nordic + Northwestern Europe.

Reference service life, product

20 years. Estimated based on the characteristics of the product and the intended application.

Reference service life, building or construction works

60 years. Standard service life for buildings to the PCR Part A of EPD Norway.

LCA: Calculation rules

Declared unit:

1 pcs Front mount box airtight

Cut-off criteria:

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) are not included. These cut-off criteria do not apply for hazardous materials and substances.

Allocation:

The allocation is made in accordance with the provisions of EN 15804. Incoming energy and water and waste production in-house is allocated equally among all products through mass allocation. Effects of primary production of recycled materials is allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis.

Data quality:


Specific data for the product composition are provided by the manufacturer. The data represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on EPDs according to EN 15804 and different LCA databases. The data quality of the raw materials in A1 is presented in the table below.

| Materials | Source | Data quality | Year |
|------------------------------|------------------------|--------------|------|
| Metal - Steel low alloy | ecoinvent 3.6 | Database | 2019 |
| Packaging - Cardboard | Modified ecoinvent 3.6 | Database | 2019 |
| Plastic - Polypropylene (PP) | Ecoinvent 3.6 | Database | 2019 |

System boundaries (X=included, MND=module not declared, MNR=module not relevant)

| Product stage | | | Construction installation stage | | Use stage | | | | | | | End of life stage | | | | Beyond the system boundaries |
|---------------|-----------|---------------|---------------------------------|----------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|----------------------------|-----------|------------------|----------|-------------------------------------|
| Raw materials | Transport | Manufacturing | Transport | Assembly | Use | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | De-construction demolition | Transport | Waste processing | Disposal | Reuse-Recovery- Recycling-potential |
| A1 | A2 | A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
| X | X | X | X | X | MND | MND | MND | MND | MND | MND | MND | X | X | X | X | X |

System boundary:

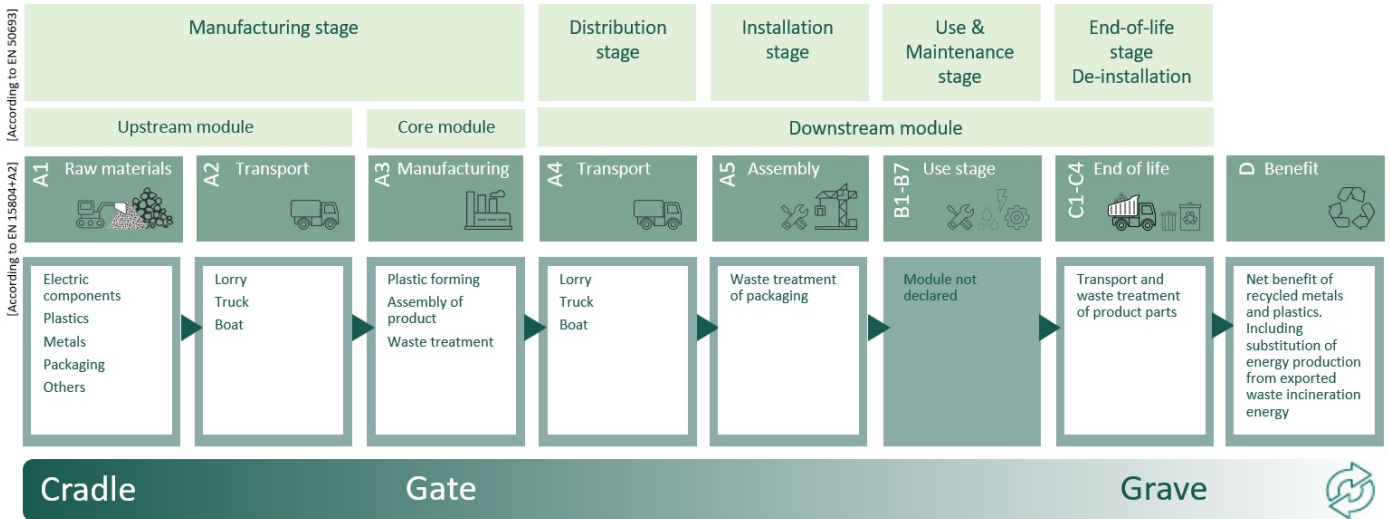

Additional technical information:

Link to Mounting instruction on our website:

https://www.sg-as.com/assets/product/default/data/702685_InstallDK_forfradaase/20/702685_forfradaase_user%20manual.pdf

LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

Module A4 = Transportation by truck (160 km) from the production site in Shunde, China to the harbor in Shenzhen, China. After this the goods are transported by ship (19330 km) from Shenzhen, China to Hamburg, Germany. Then with a truck (650 km) from Hamburg, Germany to the warehouse in Lillesand, Norway + 800 km for Nordic / Northwestern Europe Market.

Modules A5 = Installation is performed in the Nordic / Northwestern Europe Market and done by manual labor. The use of portable electrical devices such as drills usually have low energy requirements falling under the cut-off criterion of 1% and are therefore neglected (especially for small retail switches, outlets etc.). No product scraps are generated during installation, but the end-of-life treatment of packaging is systematically accounted for in this module.

Module B1-B7 have been excluded since the product(s) covered by this EPD do not contain electronic components.

Module C1 = De-installation is done by manual labor. The use of portable electrical devices such as drills usually have low energy requirements falling under the cut-off criterion of 1% and are therefore neglected (especially for small retail switches).

Module C2 = Transportation from building site to the waste treatment facility with an average distance of 300km.



Modules C3 and C4 = Waste treatment of the product follows the default values provided in EN 50693, Product Category Rules for life cycle assessments of electronic and electrical products and systems, table G.4. This table specified how different types of raw materials used in A1 will likely be treated during the end-of-life of the product. Waste treatments in C3 include material recycling and incineration with energy recovery and fly ash extraction. Disposal in C4 consist of landfilling of different waste fractions and of ashes.

Module D = The recyclability of metals, plastics, and electronic components allows the producers a credit for the net scrap that is produced at the end of a product's life. The benefits from recycling of net scrap are described in formula from EN 15804:2012+A2:2019. Substitution of heat and electricity generated by the incineration with energy recovery of plastic insulation and other parts is also calculated in module D.

| Transport from production place to user (A4) | Capacity utilisation (incl. return) % | Distance (km) | Fuel/Energy Consumption | Unit | Value (Liter/tonne) |
|---|---------------------------------------|---------------|-------------------------|-------|---------------------|
| Ship, Freight, Transoceanic (km) | 65,0 % | 19330 | 0,003 | l/tkm | 57,99 |
| Truck, 16-32 tonnes, EURO 6 (km) - Europe | 36,7 % | 1450 | 0,043 | l/tkm | 62,35 |
| Truck, 16-32 tonnes, EURO 6 (km) - Rest of World | 38,8 % | 160 | 0,044 | l/tkm | 7,04 |
| Assembly (A5) | | Unit | Value | | |
| Waste, packaging, corrugated board box, with recycled content, to average treatment (kg) - A5 including transport | kg | 0,0097 | | | |
| Transport to waste processing (C2) | Capacity utilisation (incl. return) % | Distance (km) | Fuel/Energy Consumption | Unit | Value (Liter/tonne) |
| Truck, 16-32 tonnes, EURO 6 (km) - Europe | 36,7 % | 300 | 0,043 | l/tkm | 12,90 |
| Waste processing (C3) | | Unit | Value | | |
| Waste treatment of polypropylene (PP), incineration with energy recovery and fly ash extraction (kg) | kg | 0,017 | | | |
| Steel to recycling (kg) | kg | 0,0052 | | | |
| Polypropylene (PP) to recycling (kg) | kg | 0,0085 | | | |
| Disposal (C4) | | Unit | Value | | |
| Landfilling of ashes from incineration of Polypropylene (PP), process per kg ashes and residues (kg) | kg | 0,00051 | | | |
| Landfilling of steel (kg) | kg | 0,0013 | | | |
| Landfilling of plastic mixture (kg) | kg | 0,017 | | | |
| Benefits and loads beyond the system boundaries (D) | | Unit | Value | | |
| Substitution of electricity (MJ) | MJ | 0,028 | | | |
| Substitution of thermal energy, district heating (MJ) | MJ | 0,43 | | | |
| Substitution of Polypropylene, PP granulate (kg) | kg | -0,0021 | | | |
| Substitution of primary steel with net scrap (kg) | kg | -0,0013 | | | |

LCA: Results

The LCA results are presented below for the declared unit defined on page 2 of the EPD document.

| Environmental impact | | | | | | | | | | | | |
|--|------------------------|-----------|----------|----------|----------|----------|----|----------|----------|----------|-----------|--|
| Indicator | Unit | A1 | A2 | A3 | A4 | A5 | C1 | C2 | C3 | C4 | D | |
|  GWP-total | kg CO ₂ -eq | 1,63E-01 | 1,07E-02 | 1,36E-01 | 2,64E-02 | 1,66E-02 | 0 | 2,90E-03 | 4,37E-02 | 2,01E-03 | 3,12E-03 | |
|  GWP-fossil | kg CO ₂ -eq | 1,76E-01 | 1,07E-02 | 1,36E-01 | 2,64E-02 | 1,57E-04 | 0 | 2,90E-03 | 4,37E-02 | 2,01E-03 | 3,19E-03 | |
|  GWP-biogenic | kg CO ₂ -eq | -1,38E-02 | 4,16E-06 | 3,92E-05 | 9,38E-06 | 1,65E-02 | 0 | 1,20E-06 | 3,61E-07 | 1,90E-07 | 1,49E-05 | |
|  GWP-luluc | kg CO ₂ -eq | 2,06E-04 | 3,91E-06 | 1,65E-05 | 1,30E-05 | 5,19E-08 | 0 | 1,03E-06 | 5,52E-08 | 4,98E-08 | -8,44E-05 | |
|  ODP | kg CFC11-eq | 8,89E-09 | 2,32E-09 | 1,17E-09 | 5,81E-09 | 3,30E-11 | 0 | 6,56E-10 | 3,40E-11 | 6,20E-11 | -1,82E-04 | |
|  AP | mol H ⁺ -eq | 7,87E-04 | 3,20E-05 | 6,73E-04 | 3,95E-04 | 7,43E-07 | 0 | 8,32E-06 | 5,51E-06 | 1,57E-06 | 1,27E-06 | |
|  EP-FreshWater | kg P -eq | 6,14E-06 | 1,00E-07 | 2,79E-06 | 1,71E-07 | 1,29E-09 | 0 | 2,31E-08 | 3,67E-09 | 2,48E-09 | -7,42E-08 | |
|  EP-Marine | kg N -eq | 1,49E-04 | 6,29E-06 | 1,38E-04 | 9,48E-05 | 2,46E-07 | 0 | 1,65E-06 | 2,64E-06 | 2,60E-06 | -2,80E-06 | |
|  EP-Terrestrial | mol N -eq | 1,60E-03 | 7,04E-05 | 1,52E-03 | 1,06E-03 | 2,66E-06 | 0 | 1,84E-05 | 2,85E-05 | 6,22E-06 | -3,05E-05 | |
|  POCP | kg NMVOC-eq | 5,38E-04 | 2,63E-05 | 3,94E-04 | 2,86E-04 | 7,65E-07 | 0 | 7,06E-06 | 6,86E-06 | 2,19E-06 | 1,41E-07 | |
|  ADP-minerals&metals ¹ | kg Sb-eq | 1,69E-06 | 2,87E-07 | 3,47E-07 | 5,10E-07 | 3,82E-09 | 0 | 8,00E-08 | 1,60E-09 | 1,59E-09 | 3,65E-08 | |
|  ADP-fossil ¹ | MJ | 3,74E+00 | 1,58E-01 | 1,13E+00 | 3,73E-01 | 2,20E-03 | 0 | 4,38E-02 | 2,96E-03 | 4,63E-03 | 1,31E-01 | |
|  WDP ¹ | m ³ | 7,82E-01 | 5,15E-02 | 1,09E-01 | 2,40E-01 | 2,78E-03 | 0 | 4,24E-02 | 6,89E-03 | 4,71E-02 | -3,93E-01 | |

GWP-total = Global Warming Potential total; GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption

"Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"







*INA Indicator Not Assessed

1. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator

Remarks to environmental impacts

The product is compliant with the European RoHS Directive 2011/65/EU on Restriction of the use of certain Hazardous Substances in Electrical and Electronic equipment and with the European REACH regulation (EC) no 1907/2006 on Registration, Evaluation, Authorization and Restriction of Chemicals.

Additional environmental impact indicators











| Indicator | Unit | A1 | A2 | A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
|---|-------------------|----------|----------|----------|----------|----------|----|----------|----------|----------|-----------|
|  PM | Disease incidence | 7,63E-09 | 6,90E-10 | 9,06E-09 | 9,61E-10 | 1,10E-11 | 0 | 1,77E-10 | 2,60E-11 | 3,10E-11 | -1,00E-09 |
|  IRP ² | kgBq U235 -eq | 4,56E-03 | 6,56E-04 | 8,12E-04 | 1,61E-03 | 9,39E-06 | 0 | 1,91E-04 | 5,16E-06 | 2,31E-05 | -1,58E-04 |
|  ETP-fw ¹ | CTUe | 5,06E+00 | 1,28E-01 | 3,40E+00 | 2,56E-01 | 2,93E-03 | 0 | 3,25E-02 | 8,77E-03 | 8,10E-01 | -9,49E-02 |
|  HTP-c ¹ | CTUh | 1,60E-10 | 0,00E+00 | 3,40E-11 | 0,00E+00 | 0,00E+00 | 0 | 0,00E+00 | 1,00E-12 | 0,00E+00 | 5,00E-12 |
|  HTP-nc ¹ | CTUh | 3,85E-09 | 1,26E-10 | 1,45E-09 | 1,90E-10 | 4,00E-12 | 0 | 3,50E-11 | 3,60E-11 | 4,00E-12 | -3,09E-10 |
|  SQP ¹ | dimensionless | 6,71E-01 | 1,08E-01 | 2,43E-01 | 1,83E-01 | 1,47E-03 | 0 | 3,06E-02 | 3,74E-04 | 1,64E-02 | -2,34E-01 |

PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Potential Soil Quality Index (dimensionless)

"Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"

*INA Indicator Not Assessed

1. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator
2. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.




| Resource use | | | | | | | | | | | | |
|---|----------------|----------|----------|----------|----------|-----------|----|----------|-----------|----------|-----------|--|
| Indicator | Unit | A1 | A2 | A3 | A4 | A5 | C1 | C2 | C3 | C4 | D | |
|  PERE | MJ | 2,92E-01 | 1,79E-03 | 1,15E-01 | 4,23E-03 | 3,61E-05 | 0 | 6,27E-04 | 9,00E-05 | 2,58E-04 | -2,18E-01 | |
|  PERM | MJ | 5,67E-02 | 0,00E+00 | 0,00E+00 | 0,00E+00 | -5,67E-02 | 0 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | |
|  PERT | MJ | 3,49E-01 | 1,79E-03 | 1,15E-01 | 4,23E-03 | -5,67E-02 | 0 | 6,27E-04 | 9,00E-05 | 2,58E-04 | -2,18E-01 | |
|  PENRE | MJ | 2,33E+00 | 1,58E-01 | 1,13E+00 | 3,73E-01 | 2,20E-03 | 0 | 4,38E-02 | 2,96E-03 | 4,63E-03 | 6,62E-02 | |
|  PENRM | MJ | 1,41E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0 | 0,00E+00 | -1,41E+00 | 0,00E+00 | 7,03E-02 | |
|  PENRT | MJ | 3,74E+00 | 1,58E-01 | 1,13E+00 | 3,73E-01 | 2,20E-03 | 0 | 4,38E-02 | -1,40E+00 | 4,63E-03 | 1,37E-01 | |
|  SM | kg | 2,69E-02 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | |
|  RSF | MJ | 4,34E-05 | 3,49E-05 | 5,52E-05 | 1,36E-04 | 1,20E-06 | 0 | 2,24E-05 | 2,48E-06 | 5,40E-06 | 2,99E-05 | |
|  NRSF | MJ | 0,00E+00 | 2,97E-04 | 6,65E-04 | 7,46E-04 | 4,94E-06 | 0 | 8,02E-05 | 0,00E+00 | 6,75E-05 | -1,46E-02 | |
|  FW | m ³ | 1,54E-03 | 1,76E-05 | 1,07E-03 | 3,24E-05 | 1,04E-06 | 0 | 4,68E-06 | 8,18E-06 | 5,71E-06 | -2,18E-04 | |

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM = Use of secondary materials; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Net use of fresh water

*Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"

*INA Indicator Not Assessed

End of life - Waste






| Indicator | Unit | A1 | A2 | A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
|--|------|----------|----------|----------|----------|----------|----|----------|----------|----------|-----------|
|  HWD | kg | 6,12E-04 | 1,43E-05 | 1,95E-04 | 1,89E-05 | 0,00E+00 | 0 | 2,26E-06 | 0,00E+00 | 4,81E-04 | 8,26E-06 |
|  NHWD | kg | 1,58E-02 | 7,58E-03 | 1,36E-02 | 1,18E-02 | 9,70E-03 | 0 | 2,13E-03 | 0,00E+00 | 1,87E-02 | -1,33E-04 |
|  RWD | kg | 3,98E-06 | 1,04E-06 | 7,16E-07 | 2,55E-06 | 0,00E+00 | 0 | 2,98E-07 | 0,00E+00 | 3,05E-08 | -1,26E-07 |

HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed

*Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3} = 0,009$

*INA Indicator Not Assessed

End of life - Output flow

| Indicator | Unit | A1 | A2 | A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
|---|------|----------|----------|----------|----------|----------|----|----------|----------|----------|----------|
|  CRU | kg | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
|  MFR | kg | 0,00E+00 | 0,00E+00 | 2,04E-02 | 0,00E+00 | 9,02E-03 | 0 | 0,00E+00 | 1,38E-02 | 1,54E-06 | 1,19E-06 |
|  MER | kg | 0,00E+00 | 0,00E+00 | 3,84E-03 | 0,00E+00 | 1,32E-08 | 0 | 0,00E+00 | 1,72E-02 | 3,77E-08 | 5,17E-06 |
|  EEE | MJ | 0,00E+00 | 0,00E+00 | 5,83E-03 | 0,00E+00 | 5,55E-04 | 0 | 0,00E+00 | 2,79E-02 | 2,44E-06 | 9,03E-06 |
|  EET | MJ | 0,00E+00 | 0,00E+00 | 8,82E-02 | 0,00E+00 | 8,39E-03 | 0 | 0,00E+00 | 4,23E-01 | 3,70E-05 | 1,37E-04 |

CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported energy electrical; EET = Exported energy thermal

*Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3} = 0,009$

*INA Indicator Not Assessed

Biogenic Carbon Content

| Indicator | Unit | At the factory gate |
|---|------|---------------------|
| Biogenic carbon content in product | kg C | 0,00E+00 |
| Biogenic carbon content in accompanying packaging | kg C | 4,49E-03 |

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO₂

Additional requirements

Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

| Electricity mix | Source | Amount | Unit |
|--------------------------|---------------|---------|---------------------------|
| Electricity, China (kWh) | ecoinvent 3.6 | 1102,91 | g CO ₂ -eq/kWh |

Dangerous substances

The product contains no substances given by the REACH Candidate list.

Indoor environment

No effect on indoor environment.

Additional Environmental Information

| Additional environmental impact indicators required in NPCR Part A for construction products | | | | | | | | | | | |
|--|------------------------|----------|----------|----------|----------|----------|----|----------|----------|----------|----------|
| Indicator | Unit | A1 | A2 | A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| GWPIOBC | kg CO ₂ -eq | 1,79E-01 | 1,07E-02 | 1,29E-01 | 2,64E-02 | 1,57E-04 | 0 | 2,90E-03 | 4,37E-02 | 2,01E-03 | 3,59E-03 |

GWPIOBC: Global warming potential calculated according to the principle of instantaneous oxidation. In order to increase the transparency of biogenic carbon contribution to climate impact, the indicator GWP-IOBC is required as it declares climate impacts calculated according to the principle of instantaneous oxidation. GWP-IOBC is also referred to as GWP-GHG in context to Swedish public procurement legislation.

Bibliography

ISO 14025:2010. Environmental labels and declarations - Type III environmental declarations - Principles and procedures. International Organization for Standardization.

ISO 14044:2006. Environmental management - Life cycle assessment - Requirements and guidelines. International Organization for Standardization.

EN 15804:2012+A2:2019. Environmental product declaration - Core rules for the product category of construction products. European Committee for Standardization.

ISO 21930:2017. Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products. International Organization for Standardization.





EN 50693:2019. Product category rules for life cycle assessments of electronic and electrical products and systems. European Committee for Standardization.

Ecoinvent v3, 2019. Allocation, cut-off by classification. Swiss Centre of Life Cycle Inventories.

Iversen et al., (2021). eEPD v2021.09, background information for EPD generator tool system verification, LCA.no. Report number: 07.21. System verification report.

Babwah & Philis (2023). EPD generator based on PCR EPD Italy 007, background information for EPD generator application and LCA data, LCA.no. Report number 09.2023. PCR verification report (based on core PCR).

EPD Italy (2020). PCR EPD Italy 007 Part A for electronic and electrical products and systems. EPD Italy. Version 3, issue 13-01-2023 and valid until 19-01-2025.

| | | |
|---|--|---|
|  <small>Global program operator</small> | Program operator and publisher The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo, Norway | Phone: +47 977 22 020 e-mail: post@epd-norge.no web: www.epd-norge.no |
|  | Owner of the declaration: SG Armaturen AS Skytterheia 25, 4790 Lillesand, Norway | Phone: +47 90021243 e-mail: audun.skare@sg-as.no web: www.sg-as.com |
|  | Author of the Life Cycle Assessment LCA.no AS Dokka 6A, 1671 Kråkerøy, Norway | Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no |
|  | Developer of EPD generator LCA.no AS Dokka 6A, 1671 Kråkerøy, Norway | Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no |
|  | ECO Platform ECO Portal | web: www.eco-platform.org web: ECO Portal |