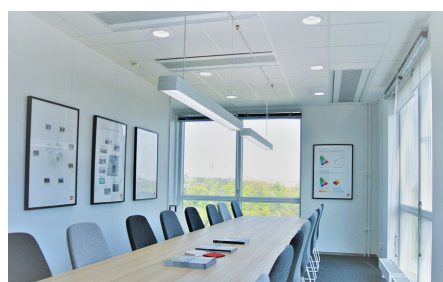




Facet II



Facet II is a slim, minimalistic luminaire with white powdercoating. With the direct/indirect light and glare-free optics in PMMA it is perfect for classrooms or open offices where light comfort is very important. The wall bracket (accessory) makes it a perfect choice for blackboard lighting. Plug-and-play solution for quick installation.

Produkt- og miljøbilleder



Artikel	Beskyttelse	Styring	Montering/Tilslutning	Dimensioner
 5703821205276 Facet II 1700 Hvid 8450lm 3000K Ra>80 DALI-2 52W LED 163 lm/W SDCM:3 L80/B10>100.000, L94>50.000 Direkte/Indirekte 58/42%, Linse C, prismatisk conical	Klasse I IP20	DALI-2	Nedhængt, Indoor 2x2m wire sæt m/løkke M4 Kabel 5x0,75mm ² 2,5m hvid	L1756 x W112 x H80
 5703821171946 Facet II 1200 Hvid 4500lm 3000K Ra>80 DALI-2 29W LED 155 lm/W SDCM:3 L80/B10>100.000, L94>50.000 Direkte/Indirekte 65/35%, Linse C, prismatisk conical	Klasse I IP20	DALI-2	Nedhængt, Indoor 2x2m wire sæt m/løkke M4 Kabel 5x0,75mm ² 2,5m	L1196 x W112 x H80
 5703821171960 Facet II 1700 Hvid 6760lm 3000K Ra>80 DALI-2 53W LED 128 lm/W SDCM:3 L80/B10>100.000, L94>50.000 Direkte/Indirekte 30/70%, Linse C, prismatisk conical	Klasse I IP20	DALI-2	Nedhængt, Indoor 2x2m wire sæt m/løkke M4 Kabel 5x0,75mm ² 2,5m hvid	L1756 x W112 x H80
 5703821172448 Facet II 1200 Hvid 2020lm 3000K Ra>80 DALI-2 18W LED 112 lm/W SDCM:3 L80/B10>100.000, L94>50.000 Direkte/Asymmetrisk, Linse L, prismatisk linear	Klasse I IP20	DALI-2	Nedhængt, Indoor 2x2m wire sæt m/løkke M4 Kabel 5x0,75mm ² 2,5m hvid	L1196 x W112 x H80
 5703821171984 Facet II 1200 Hvid 4500lm 3000K Ra>80 On/Off 29W LED 155 lm/W SDCM:3 L80/B10>100.000, L94>50.000 Direkte/Indirekte 65/35%, Linse C, prismatisk conical	Klasse I IP20	On/Off	Nedhængt, Indoor 2x2m wire sæt m/løkke M4 Kabel 3x0,75mm ² 2,5m m/Schuko hvid	L1196 x W112 x H80
 5703821172004 Facet II 1200 Hvid 4700lm 4000K Ra>80 DALI-2 29W LED 162 lm/W SDCM:3	Klasse I IP20	DALI-2	Nedhængt, Indoor 2x2m wire sæt m/løkke M4 Kabel 5x0,75mm ² 2,5m hvid	L1196 x W112 x H80

Artikel	L80/B10>100.000, L94>50.000	Beskyttelse	Styring	Montering/Tilslutning	Dimensioner
	Direkte/Indirekte 65/35%, Linse C, prismetisk conical	Klasse I	DALI-2	Nedhængt, Indoor	L1756 x W112 x H80
	5703821172055 Facet II 1700 Hvid 7120lm 4000K Ra>80 DALI-2 53W LED 134 lm/W SDCM:3 L80/B10>100.000, L94>50.000 Direkte/Indirekte 30/70%, Linse C, prismetisk conical	IP20		2x2m wire sæt m/løkke M4 Kabel 5x0,75mm² 2,5m hvid	
	5703821172455	Klasse I	DALI-2	Nedhængt, Indoor	L1196 x W112 x H80
	Facet II 1200 Hvid 2120lm 4000K Ra>80 DALI-2 18W LED 118 lm/W SDCM:3 L80/B10>100.000, L94>50.000 Direkte/Asymmetrisk, Linse L, prismetisk linear	IP20		2x2m wire sæt m/løkke M4 Kabel 5x0,75mm² 2,5m hvid	
	5703821171991	Klasse I	On/Off	Nedhængt, Indoor	L1196 x W112 x H80
	Facet II 1200 Hvid 4700lm 4000K Ra>80 On/Off 29W LED 162 lm/W SDCM:3 L80/B10>100.000, L94>50.000 Direkte/Indirekte 65/35%, Linse C, prismetisk conical	IP20		2x2m wire sæt m/løkke M4 Kabel 3x0,75mm² 2,5m m/Schuko hvid	
Tilbehør					
	7021982121982				L30 x W20 x H5
	Sort T-skinne loftbeslag				
	7021982122552				L596 x W35 x H17
	T-profil Hvid Ophængsskinne 600mm				
	5703821172479				L490 x W70 x H70
	Facet II Hvid Vægbeslag kit				
	7021988203071				L137 x W27 x H27
	Nødllys batteri 3 Timer 3.0Ah - Model No: B093				