








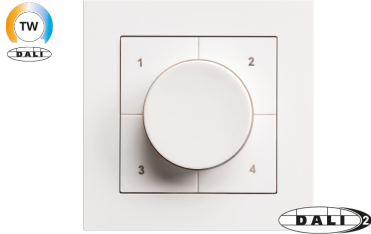

DALI dimmer, which can control both the intensity and colour (via DALI Type 8). In order to change the colour temperature, simply double click on the rotary switch. The 4 buttons allow you to save the applicable setting, which can be recreated at the click of a button. It features an integrated DALI power supply that ensures simple installation without the need for any other DALI equipment. One LEDDim DALI can control up to 64 DALI luminaires via broadcast. It is possible to connect up to 4 LEDDim DALI units together and control up to 256 DALI fixtures.

LEDDim DALI



Produkt- og miljøbilleder



Artikel	Beskyttelse	Styring	Montering/Tilslutning	Dimensioner
Tilbehør				
 7021987850115 Underlag LEDDim 400 / DALI Sort 1X	IP41		Indbygget, Indoor	L86 x W86 x H35
 7021987851112 Underlag LEDDim 400 / DALI Sort 2X	IP41		Indbygget, Indoor	L86 x W157 x H35
 7021987852119 Underlag LEDDim 400 / DALI Sort 3X	IP41		Indbygget, Indoor	L86 x W228 x H35
 7021988204221 LEDDim Smart Sort TW DALI Front				L54 x W54 x H13
 7021988204801 LEDDim V5 - Sort TW/MASTER/DALI SG Front				L84 x W84 x H13
 7021987850016 Underlag LEDDim 400 / DALI Hvid 1X	IP41		Indbygget, Indoor	L86 x W86 x H35
 7021987851013 Underlag LEDDim 400 / DALI Hvid 2X	IP41		Indbygget, Indoor	L86 x W157 x H35
 7021987852010 Underlag LEDDim 400 / DALI Hvid 3X	IP41		Indbygget, Indoor	L86 x W228 x H35