

Bassi Graphite 690lm 3000K Ra>80 Trailing edge dimming

Article code: 623187
 EAN: 7021986231878



Electrical

System wattage: 10W
 Voltage: 220-240V
 Max. luminaires per circuit breaker: B10: 33, B16: 52, C10: 40, C16: 64

Light technic

Type of light source: LED
 Luminous flux: 690lm
 Efficacy: 69 lm/W
 Colour temperature: 3000K
 Colour rendering (CRI): Ra>80
 MacAdams factor: SDCM: 3
 Lifetime: L70/B50>50,000
 Light distribution: Direct
 Optic: Opal
 Beam angle: 120°
 Photobiological safety: RG 0

Control/Dimming

Type: Trailing edge dimming

Protection

Luminaire class: Class II
 Fire protection class: 850°C - 30s

Energy and approvals

Contains light source of energy class: E
 Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
 Colour: Graphite
 Optics: UV-stabilized polycarbonate

Mounting/Connection



Mounting: Surface, Indoor / Outdoor
 Connection: Screwless terminal block

Dimensions

Length (mm) L: 240
 Width (mm) W: 240
 Height (mm) H: 80
 Weight (kg) gross/net: 2.136 / 1.69

Packaging

Packing dimensions (mm): 240 x 240 x 80

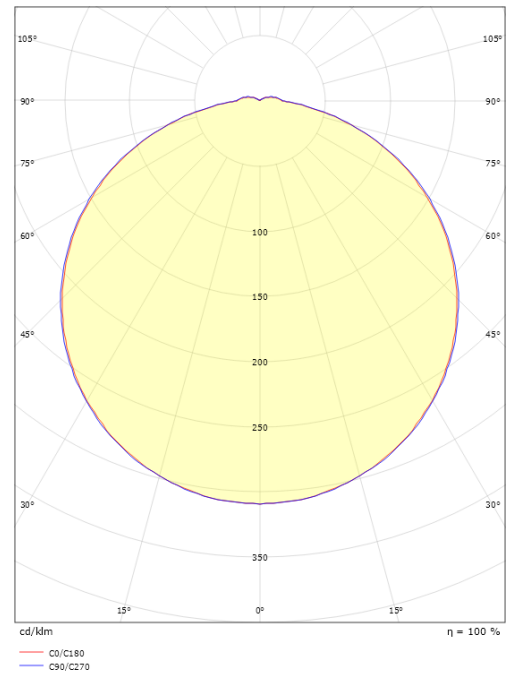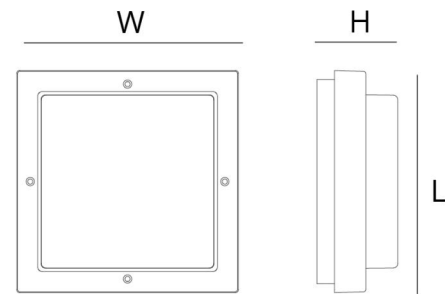

7 0 2 1 9 8 6 2 3 1 8 7 8