

Tysnes 66



Tysnes 66 1200 Grey 5510lm 4000K Ra>80 On/Off

Article code: 120031
EAN: 7021981200312



Electrical

Wattage: 34W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 14, B16: 23, C10: 22, C16: 36
Leakage current (mA): 0.31

Light technic

Type of light source: LED
Luminous flux: 5510lm
Efficacy: 157
Colour temperature: 4000K
Colour rendering (CRI): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Minimum ambient temperature: -20°C
Light distribution: Direct
Optic: Opal
Beam angle: 116°
UGR: UGR<25
Visible flicker (PstLM): 0.01
Stroboscopic flicker (SVM): 0.05
Photobiological safety: RG 0

Control/Dimming

Type: On/Off

Protection

Luminaire class: Class I
IK Class: IK10
IP Class: IP66
Fire protection class: 850°C - 30s

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting
Food Safety approved (IFS and HACCP): Yes

Materials and finish

Housing: UV-stabilized polycarbonate
Colour: Grey
Optics: UV-stabilized polycarbonate

Mounting/Connection



Mounting: Surface, Indoor
Module: 1200
Connection: 3-pole screwless terminal block with 3x2,5mm2 through wiring

Dimensions

Length (mm) L: 1200
Width (mm) W: 85
Height (mm) H: 80
Weight (kg) gross/net: 1.65 / 1.5

Packaging

Packing dimensions (mm): 1225 x 85 x 90

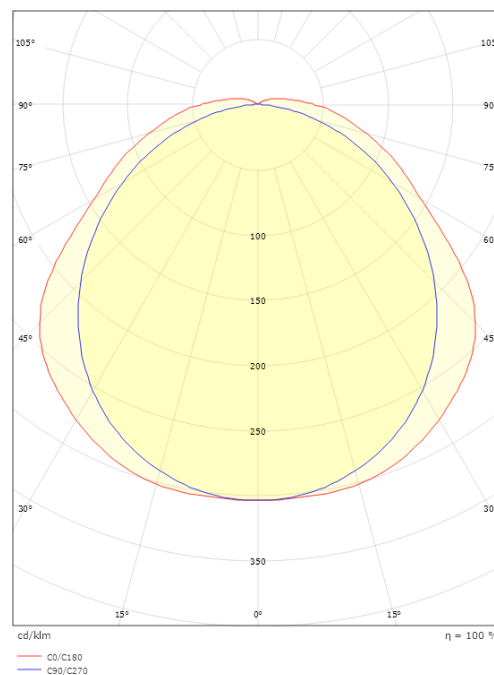

7 0 2 1 9 8 1 2 0 0 3 1 2