

Uniled IsoSafe Blade



UniLED IsoSafe Blade White 690lm 3000K Ra 98 Trailing edge

Article code: 904331
EAN: 7021989043317



Electrical

Wattage: 7W
System wattage: 8.5W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
Luminous flux: 690lm
Efficacy: 81 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra 98
MacAdams factor: SDCM: 2
Lifetime: L90/B10>100,000
Light distribution: Direct
Optic: Reflector
Beam angle: 42°

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II SELV
IP Class: IP54/IP20

Energy and approvals

Contains light source of energy class: F
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Matte white (RAL 9003)
Optics: Tempered glass

Mounting/Connection




Mounting: Recessed, Indoor / Outdoor
Connection: Screwless terminal block

Dimensions

Height (mm) H: 37
Diameter (mm) D: 94
Cut-out (mm): 83
Ceiling void depth (mm): 35
Distance to flammable materials: 10mm
Weight (kg) gross/net: 0.4 / 0.4

Packaging

Packing dimensions (mm): 115 x 100 x 95

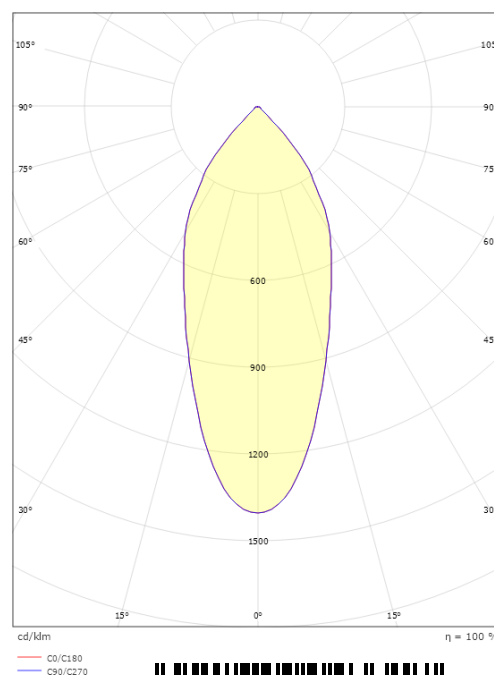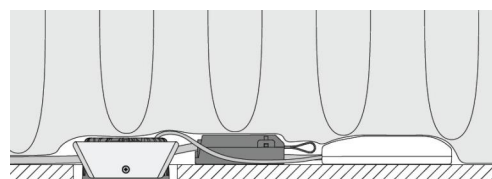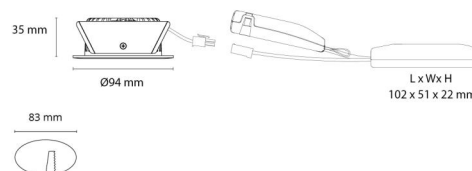

7 0 2 1 9 8 9 0 4 3 3 1 7