

View White 890lm 2700K Ra>90 Trailing edge dimming

Article code: 111420
 EAN: 7021981114206


Electrical

System wattage: 11W
 Voltage: 220-240V
 Frequency (Hz): 50/60Hz
 Max. luminaires per circuit breaker: B10: 23, B16: 37, C10: 29, C16: 46

Light technic

Type of light source: LED
 Luminous flux: 890lm
 Efficacy: 81 lm/W
 Colour temperature: 2700K
 Colour rendering (CRI): Ra>90
 MacAdams factor: SDCM: 3
 Lifetime: L70/B10>50,000
 Light distribution: Direct
 Optic: Opal
 UGR: UGR<28
 Photobiological safety: RG 0

Control/Dimming

Type: Trailing edge dimming

Protection

Luminaire class: Class II
 IK Class: IK10
 IP Class: IP44 (mounted horizontally) / IP20 (mounted vertically)

Energy and approvals

Contains light source of energy class: D
 Breeam: Fulfils Hea 01 for flicker free lighting
 BVB: Yes

Materials and finish

Housing: Aluminium
 Colour: Matte white (RAL 9003)
 Optics: UV-stabilized polycarbonate

Mounting/Connection




Mounting: Surface, Indoor
 Connection: Screwless terminal block

Dimensions

Length (mm) L: 460
 Width (mm) W: 135
 Height (mm) H: 60
 Depth (D): 135
 Weight (kg) gross/net: 0.976 / 0.802

Packaging

Packing dimensions (mm): 470 x 142 x 70

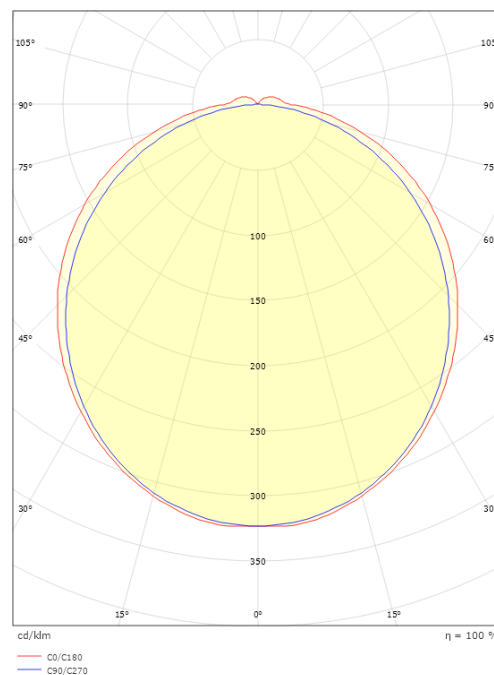

7 0 2 1 9 8 1 1 1 4 2 0 6