


## View White 910lm 3000K Ra>90 Trailing edge dimming

Article code: 111421  
 EAN: 7021981114213





### Electrical

System wattage: 14W  
 Voltage: 220-240V  
 Frequency (Hz): 50/60Hz  
 Max. luminaires per circuit breaker: B10: 23, B16: 37, C10: 29, C16: 46

### Light technic

Type of light source: LED  
 Luminous flux: 910lm  
 Efficacy: 65 lm/W  
 Colour temperature: 3000K  
 Colour rendering (CRI): Ra>90  
 MacAdams factor: SDCM: 3  
 Lifetime: L70/B10>50,000  
 Light distribution: Direct  
 Optic: Opal  
 UGR: UGR<28  
 Photobiological safety: RG 0



### Control/Dimming

Type: Trailing edge dimming

### Protection

Luminaire class: Class II

### Energy and approvals

Contains light source of energy class: E  
 Breeam: Fulfils Hea 01 for flicker free lighting  
 BVB: Yes

### Materials and finish

Housing: Aluminium  
 Colour: Matte white (RAL 9003)  
 Optics: UV-stabilized polycarbonate

### Mounting/Connection


Mounting: Surface, Indoor  
 Connection: Screwless terminal block

### Dimensions

Length (mm) L: 460  
 Width (mm) W: 135  
 Height (mm) H: 60  
 Depth (D): 135  
 Weight (kg) gross/net: 0.976 / 0.802

### Packaging

Packing dimensions (mm): 470 x 142 x 70

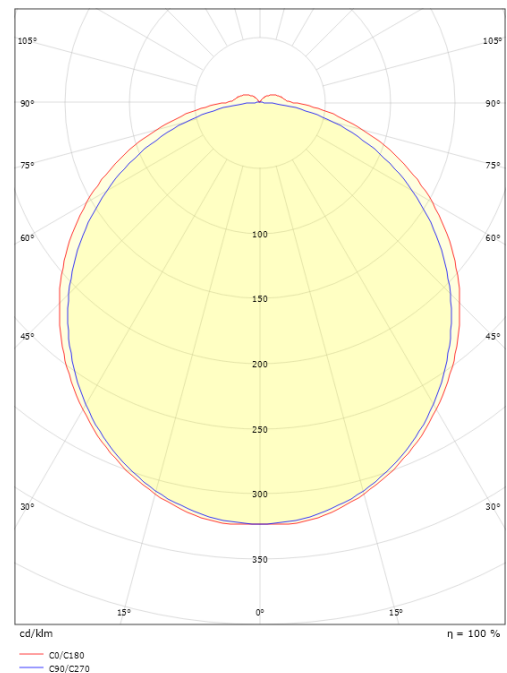

7 0 2 1 9 8 1 1 4 2 1 3