Rax Eco 180-190

Rax Eco 180-190 is a super-flexible and cost-effective downlight for general lighting in public buildings, offices, corridors, etc. It has integrated switches for 3000K/4000K and for two lumen levels, i.e. four combinations in one product. A matte white reflector provides high efficiency and low glare with UGR

Rax Eco 180-190

Galerie de produits et d’environnements

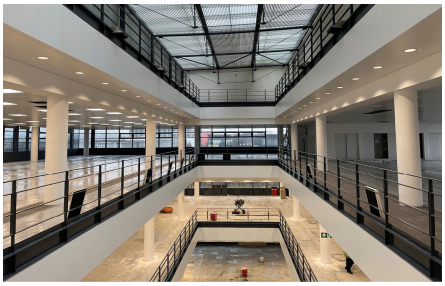

Codes-articles

Article		Protection	Convertisseurs	Montage/Connexion	Dimensions
	212588 **Rax Eco 180-190 Blanc 3000/4000K** **Ra>80 DALI-2** **LED** 113/124/110/121lm/W SDCM:3 L80/B20>50,000 Beam: 95°, Directe, Reflector	**Classe II** **IP20**	DALI-2	Indoor Linect 5 pôles / bornier sans vis	Ø210 x H93
	212584 **Rax Eco 180-190 Blanc 3000/4000K** **Ra>80 Coupure de phase** **LED** 111/116/109/115lm/W SDCM:3 L80/B20>50,000 Beam: 95°, Directe, Reflector	**Classe II** **IP20**	Coupure de phase	Indoor Linect 3 pôles / bornier sans vis	Ø210 x H93
Accessoires					
	212913 **Rax Eco 180-190 Noir Verre transparent IP44**				Ø214 x H12
	212915 **Rax Eco 180-190 Noir Verre dépoli IP44**				Ø214 x H12
	212912 **Rax Eco 180-190 Blanc Verre transparent IP44**				Ø214 x H12
	212914 **Rax Eco 180-190 Blanc Verre dépoli IP44**				Ø214 x H12
	820489 **Sensor Dim Box Blanc 200VA**				L220 x W75 x H34
	8249038725 **Rax 200 Plaque de montage**				L585 x W260 x H15