

Wave 1200 White 5280lm 3000K Ra>80 On/Off

Article code: 111175
 EAN: 7021981111755

**Electrical**

System wattage: 42W
 Voltage: 220-240V
 Max. luminaires per circuit breaker: B10: 14, B16: 23, C10: 22, C16: 36
 Leakage current (mA): 0.31

Light technic

Type of light source: LED
 Luminous flux: 5280lm
 Efficacy: 126 lm/W
 Colour temperature: 3000K
 Colour rendering (Ra): Ra>80
 MacAdams factor: SDCM: 3
 Lifetime: L70/B10>100,000
 Lifetime: L80/B10>70,000
 Light distribution: Direct
 Optic: Opal
 Beam angle: 110°
 UGR: UGR<25
 Photobiological safety: RG 0

Control/Dimming

Type: On/Off

Protection

Luminaire class: Class I
 IK Class: IK06
 IP Class: IP44

Energy and approvals

Contains light source of energy class: D
 Breeam: Fulfils Hea 01 for flicker free lighting
 BVB: Yes
 Sunda Hus: C+

Materials and finish

Housing: Steel, Aluminium
 Colour: White (RAL 9003)
 Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Surface, Indoor
 Module: 1200
 Connection: 5-pole screwless terminal block with 5x2,5mm² coupling from center to end

Dimensions

Length (mm) L: 1220
 Width (mm) W: 151
 Height (mm) H: 54
 Weight (kg) gross/net: 3 / 2.5

Packaging

Packing dimensions (mm): 1245 x 160 x 60

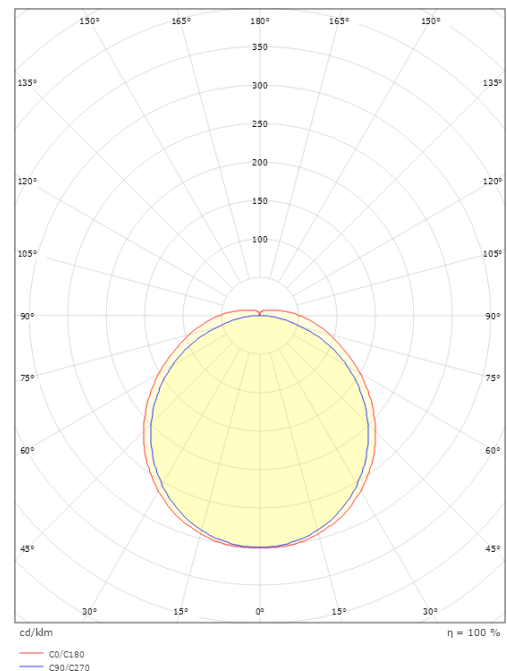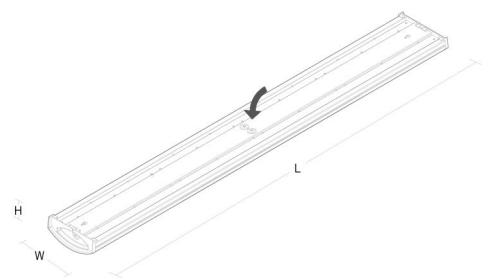

7 0 2 1 9 8 1 1 1 7 5 5